AMEZEUS

HFS GROUP

A VOTRE SERVICE DEPUIS 1995

Catalogue

Luminaires LED

Route de Taillepied 44
1095 - Lutry
info@amezeus.com
www.amezeus.com
+41 21 903 57 67

Pictography

European certificate

Class I

Class II

Class III

Protection index

Minimum distance to be left between the focus of the lighting fixture and the lighted object

Resistance to incandescent wire at 850º

LEDs per meter

Integrated gear

Gear not included

On / Off dimming

Dimming line Out IGBT / TRIAC

Luminaries should never be covered whith any heat insulating material

Maximum voltage

Maximum amperage

Transitable to pedestian area

Beam angle

dimensions for recessing

Hole diameter for recessing

Gear included

Emergency kit

Chromatic stability index

Title angle

Adjustable

Pictography

Dimming 1-10V

Dimming Push

Dimming DALI

Reference

Whatt

Opening Degrees

Color Rendering Index

IP Protection

Installation

Color temperature

Lumens meter

Lumens Watt

Voltage

Total harmonic distortion

Finishes

White

Black

Inox

Various

Anodized

Grey

Opal diffuser

Black, Bronze

Black, Gold

White, Bronze

White, Gold

Matt Coffee

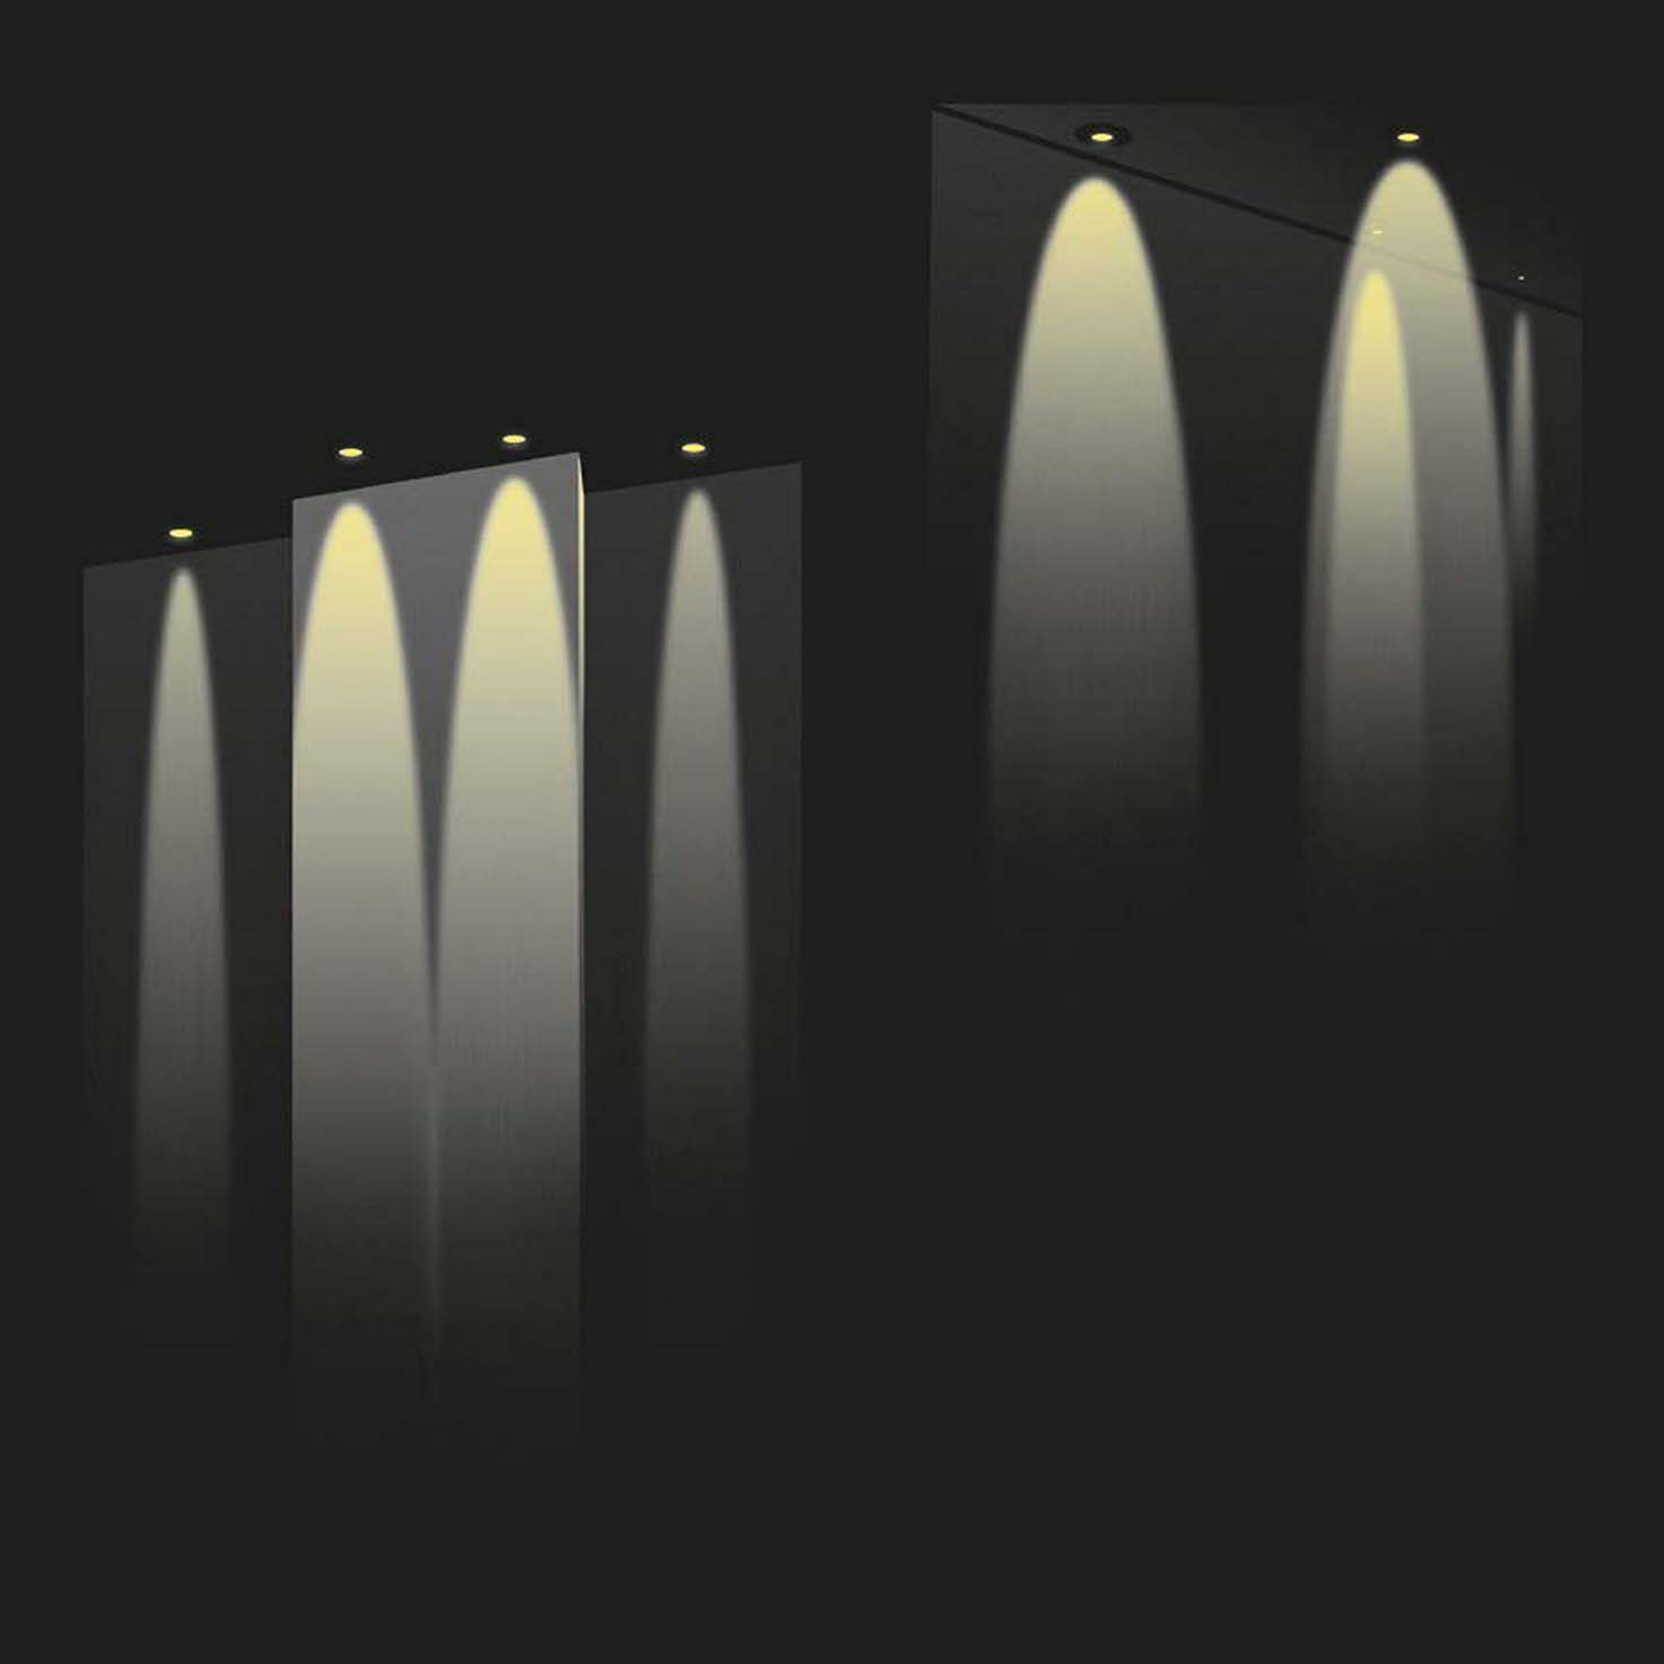

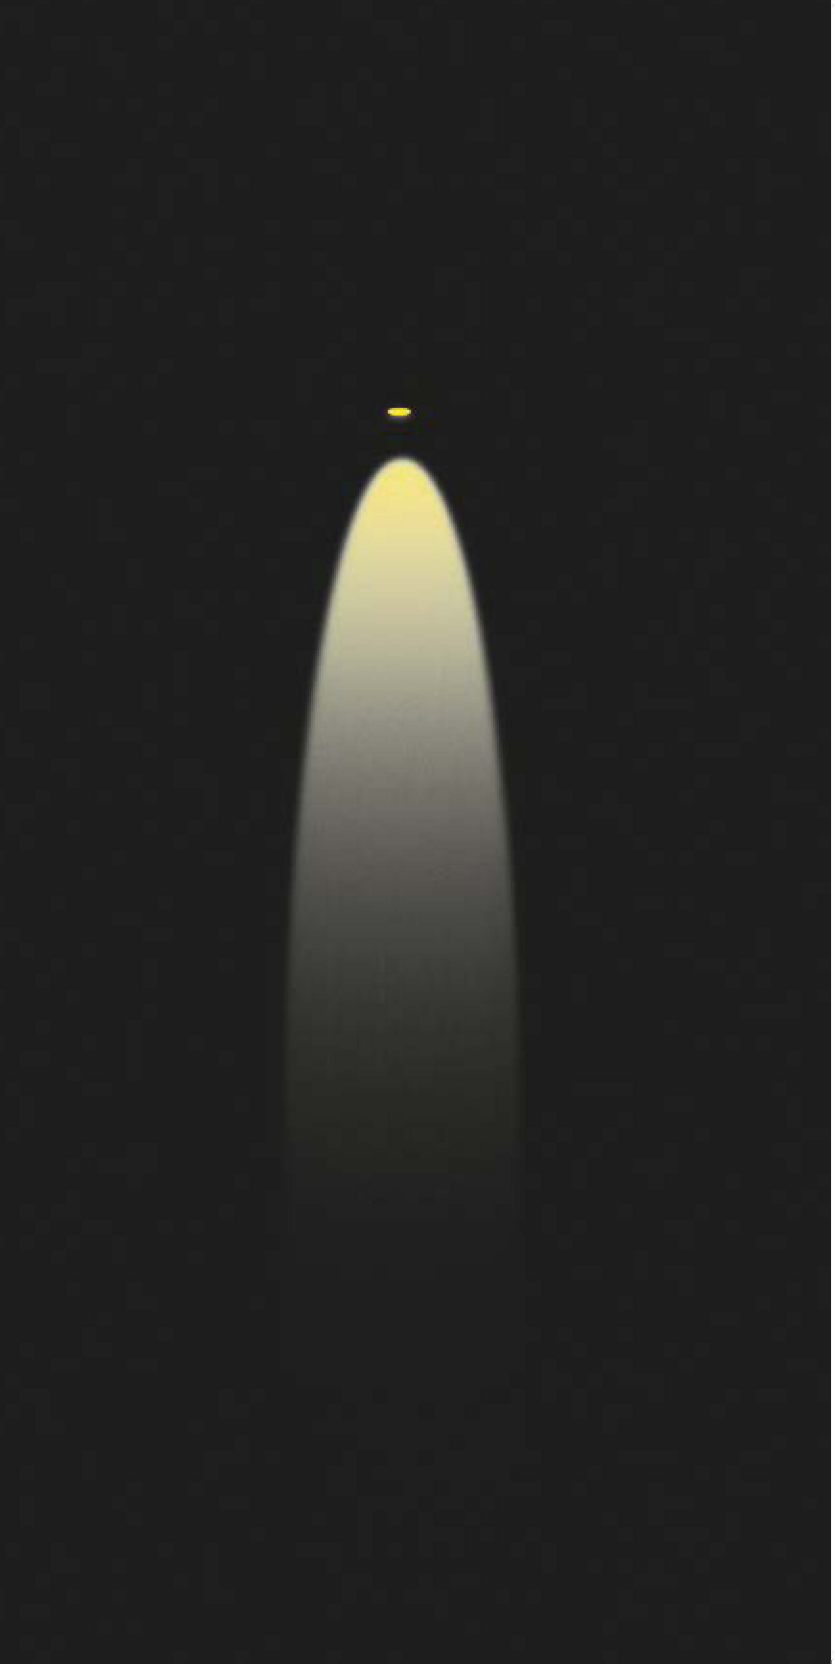

RECESSED

Ey 1

Circular LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high performance optical lens. Equipped with passive dissipation LED module.

EM004

1W

45°

3000K
6000K

76lm
96lm

76 lm/W
96 lm/W

CRI >80

L70 >50.000h







01 02 04



Ey 3

Circular LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high performance optical lens. Equipped with passive dissipation LED module.

EM005

3W

45°

3000K
6000K

135lm
152lm

45 lm/W
51 lm/W

CRI >80

L70 >50.000h



H(m)	D(cm)	Lux
1m	74	243
2m	147	61
3m	221	27

3000K 45°

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 02 04

McA 3 · 0,5m · 850° · Emergency · CE · IP 40 · 220 VAC · +15° -15° · 53mm · ELEC incl.

OPTIONAL

Dip

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM500	EM501
	6W	9W
	36°	36°
	2700K	2700K
	554lm	729lm
	92lm/W	81lm/W
CRI	90	90
	L70 >50.000h	

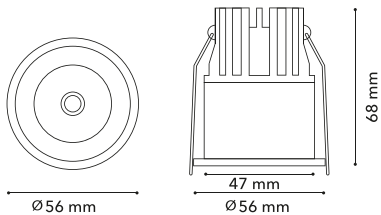





01 04

Dip C

Square LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM503	EM501
	6W	9W
	36°	36°
	2700K	2700K
	554lm	729lm
	92lm/W	81lm/W
CRI	90	90
	L70 >50.000h	

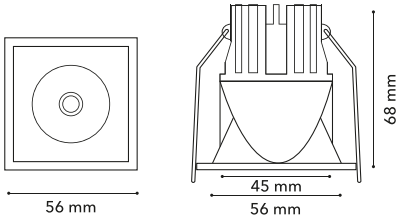







01 04

BAR
Lounge

Kup

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high performance optical lens. Equipped with passive dissipation LED module.

EM601

9W

17°

2700K

450lm

50 lm/W

CRI 90

L70 >50.000h

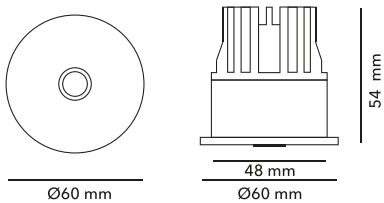

H(m)	D(cm)	Lux
1m	26	3457
2m	51	864
3m	77	384

2700K 17°





OPTIONAL

04

Kup Trimless

Trimless circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

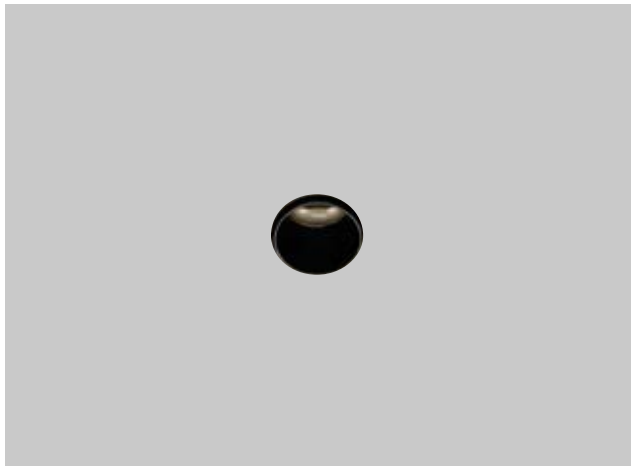

EM602

9W

17°

2700K

450lm

50 lm/W

CRI 90

L70 >50.000h







ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

McA 3 · 0,5m · 850° · Emergency (OPTIONAL) · IP 40 · 220 VAC · 50mm · ELEC incl.

04

Ano Mini

Circular LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

EM047

7W

24°

2700K
4000K

529lm
654lm

76lm/W
93lm/W

CRI 90

L70 >50.000h

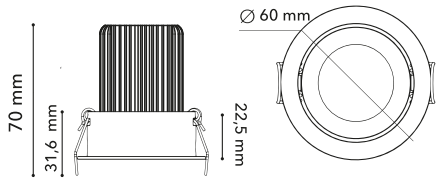

H(m)	D(cm)	Lux
1m	41	1840
2m	83	460
3m	124	204

2700K 24°

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

McA 3 · 0,5m · 850° · Emergency (OPTIONAL) · IP 40 · 220 VAC · 55mm · ELEC incl.

Ano S Mini

Square LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

EM049

7W

24°

2700K
4000K

529lm
654lm

76lm/W
93lm/W

CRI 90

L70 >50.000h

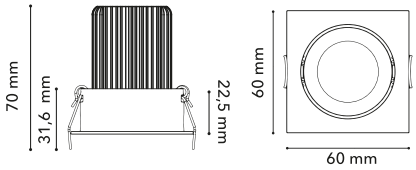

H(m)	D(cm)	Lux
1m	41	1840
2m	83	460
3m	124	204

2700K 24°

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

McA 3 · 0,5m · 850° · Emergency (OPTIONAL) · IP 40 · 220 VAC · 55mm · ELEC incl.

PEOPLE
OR A
IFUL
LACE
THER
MAKE
Beauty

Soft Mini

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

EM048

7W

24°

2700K
4000K

529lm
654lm

76lm/W
93lm/W

CRI 90

L70 >50.000h

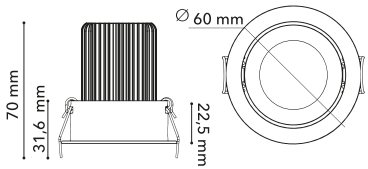

H(m)	D(cm)	Lux
1m	41	1840
2m	83	460
3m	124	204

2700K 24°

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

McA 3 · 0,5m · 850° · Emergency OPTIONAL · IP 40 · 220 VAC · 55mm · ELEC incl.

DLR

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM300	EM301
	9W	12W
	20°-38°-55°	25°-38°-55°
	2700K 3000K 4000K	2700K 3000K 5000K
	683lm 779lm 870lm	1080lm 1217lm 1318lm
	76lm/W 86lm/W 97lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90
	L70 >50.000h	

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20° 9W

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38° 9W

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55° 9W

ACCESSORIES

Transparent glass (50mm)

Frosted glass (50mm)

CRI95 Disponible

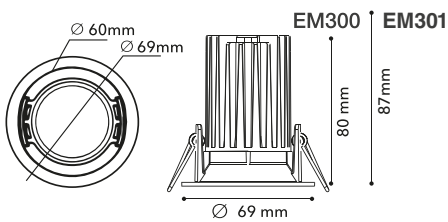



01 04 06



OPTIONAL

Inel

Circular LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM006	EM066
	9W	12W
	20°-38°-55°	25°-38°-55°
	2700K 3000K 4000K	2700K 3000K 5000K
	683lm 779lm 870lm	1080lm 1217lm 1318lm
	76 lm/W 86 lm/W 97lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90
	L70 >50.000h	

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20° 9W

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38° 9W

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55° 9W

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

CRI95 Disponible

EM066 **EM006**

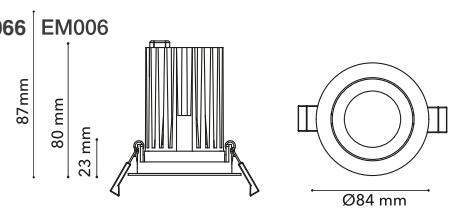



01 06 04



Inel XL

Circular LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM007	EM077
	9W	12W
	20°-38°-55°	25°-43°-60°
	2700K 3000K 4000K	2700K 3000K 5000K
	683lm 779lm 870lm	1080lm 1217lm 1318lm
	76 lm/W 86 lm/W 97lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90
	L70 >50.000h	



3000K 20° 9W



3000K 38° 9W



3000K 55° 9W

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

CRI95 Disponible

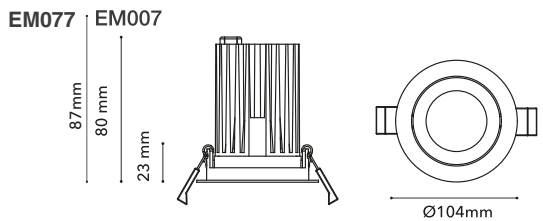



01 06 04

EL PAIS
LA VANGUARDIA
LA VANGUARDIA

Nixe

Recessed square downlight, with high efficiency specular reflector and low luminance. Built in aluminium with passive heatskin.

Frameless
Tilting

	EM211 ☐	EM221 ☐	EM251 ☐
	EM214 ■	EM224 ■	EM254 ■
	2W	4W	10W
	15°-30°-45°	15°-30°-45°	15°-30°-45°
	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
	160lm	360lm	870lm
	80lm/W	90lm/W	87lm/W
CRI	80	80	80
	L70 >50.000h		

White Code 1
Black Code 4

01 04

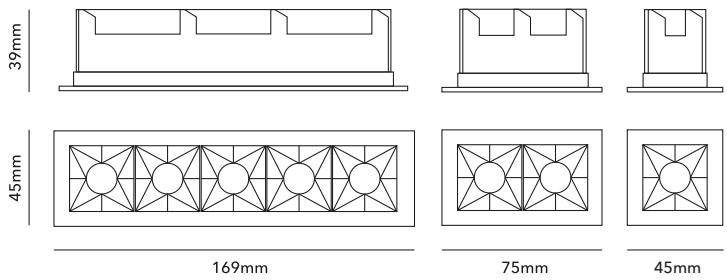





GIORGIO ARMANI
FRAMES OF LIFE

Vand

Circular LED recessed fix downlight with direct radiation with transparent glass. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	LM080	LM088
	9W	12W
	20°-38°-55°	25°-43°-60°
	2700K 3000K 4000K	2700K 3000K 5000K
	683lm 779lm 870lm	1080lm 1217lm 1318lm
	76 lm/W 86 lm/W 97lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90
	L70 >50.000h	

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20° 9W

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38° 9W

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55° 9W

ACCESSORIES

Frosted glass

CRI95 Disponible

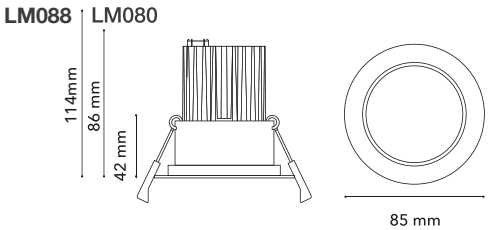





01 04 06

Comfort

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM011	EM0110
	9W	12W
	20°-38°-55°	25°-43°-60°
	2700K 3000K 4000K	2700K 3000K 5000K
	683lm 779lm 870lm	1080lm 1217lm 1318lm
	76 lm/W 86 lm/W 97lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90
	L70 >50.000h	

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20° 9W

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38° 9W

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55° 9W

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

CRI95 Disponible

EM0110 **EM011**

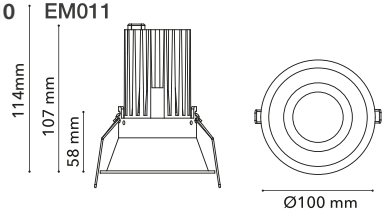



01 04 06



OPTIONAL

Ano S

Square LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM008	**EM088**
	9W	12W
	20°-38°-55°	25°-43°-60°
	2700K 3000K 4000K	2700K 3000K 5000K
	683lm 779lm 870lm	1080lm 1217lm 1318lm
	76 lm/W 86 lm/W 97lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90
	L70 >50.000h	



3000K 20° 9W



3000K 38° 9W



3000K 55° 9W

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

CRI95 Disponible

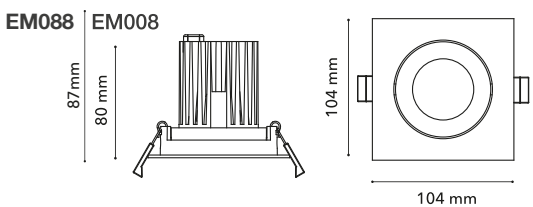



01 04 06

Square

Square LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

	EM012	**EM0120**
	9W	12W
	20°-38°-55°	25°-43°-60°
	2700K 3000K 4000K	2700K 3000K 5000K
	683lm 779lm 870lm	1080lm 1217lm 1318lm
	76 lm/W 86 lm/W 97lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90
	L70 >50.000h	

CRI95 Disponible





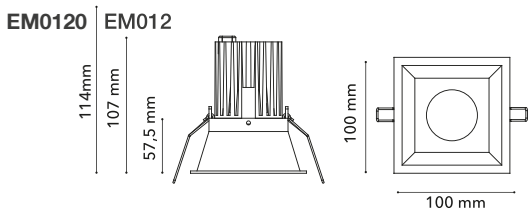



01 06 04

OPTIONAL

HELLO KITTY

Venice

Square LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM013	EM014	EM0113	EM0114
	9W	2x9W	12W	2x12W
	20°-38°-55°	20°-38°-55°	25°-43°-60°	25°-43°-60°
	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 5000K	2700K 3000K 5000K
	683lm 779lm 870lm	2x683lm 2x779lm 2x870lm	1080lm 1217lm 1318lm	2x1080lm 2x1217lm 2x1318lm
	76 lm/W 86 lm/W 97lm/W	76 lm/W 86 lm/W 97lm/W	81lm/W 87lm/W 94lm/W	81lm/W 87lm/W 94lm/W
CRI	90	90	90	90
	L70 >50.000h			

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20° 9W

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38° 9W

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55° 9W

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

CRI95 Disponible

EM0114 EM014

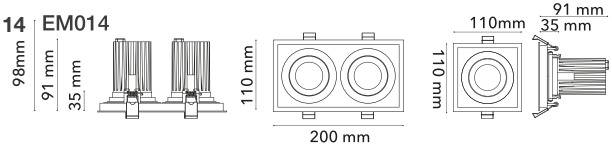



01 06 04



Deny Trimless

Square LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM110	EM111	EM112
	9W	2x9W	3x9W
	20°-38°-55°	20°-38°-55°	20°-38°-55°
	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
	683lm 779lm 870lm	2x683lm 2x779lm 2x870lm	3x683lm 3x779lm 3x870lm
	76 lm/W 86 lm/W 97lm/W	76 lm/W 86 lm/W 97lm/W	76 lm/W 86 lm/W 97lm/W
CRI	90	90	90
	L70 >50.000h		

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

CRI95 Disponible







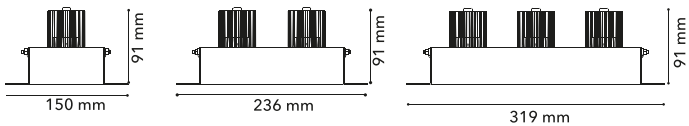



01 04

Rem

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high performance optical lens. Equipped with passive dissipation LED module.

EM045

15W

40°

2700K
4000K

1150lm
1400lm

76 lm/W
93 lm/W

CRI 90

L70 >50.000h

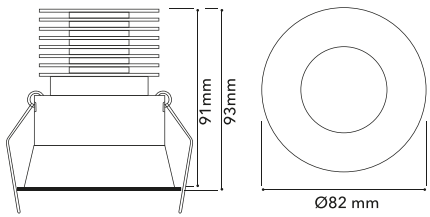

H(m)	D(cm)	Lux
1m	74	1801
2m	147	450
3m	221	200

2700K 40°



01 04



OPTIONAL

Sole

Circular LED semi-recessed fix downlight with direct radiation. Body built in aluminium injection with high performance optical lens. Equipped with passive dissipation LED module.

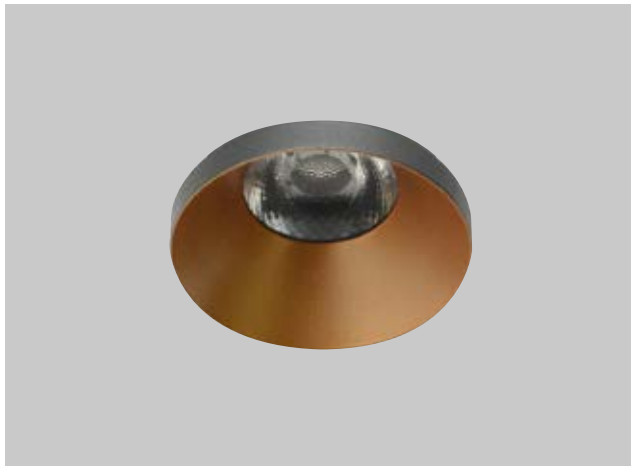

EM800

15W

40°

2700K
4000K

1150lm
1400lm

76 lm/W
93 lm/W

CRI 90

L70 >50.000h

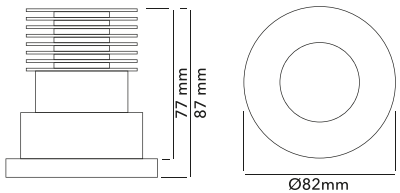

H(m)	D(cm)	Lux
1m	74	1801
2m	147	450
3m	221	200

2700K 40°

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

10 04

McA 3 · 0,5m · 850° · Emergency (OPTIONAL) · IP 40 · 220 VAC · 72mm · ELEC incl.

COOKING
WO
ASADOS
FRITURAS

Zip

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

EM650

6W

40°

3000K

350lm

58lm/W

CRI 97

L70 >50.000h





**Dimable option coming soon*

ON /OFF

01 04 ROSE

McA 3 | 0,5m | 850° | Emergency (OPTIONAL) | CE | IP 40 | 220 VAC | 35mm | ELEC incl.

Stap

Square LED recessed fix downlight with direct radiation. Body built in aluminium injection with high performance optical lens. Equipped with passive dissipation LED module.

	EM050	EM060
	15W	2X15W
	40°	40°
	2700K 4000K	2700K 4000K
	1150lm 1400lm	2x1150lm 2x1400lm
	76 lm/W 93 lm/W	76 lm/W 93 lm/W
CRI	90	90
	L70 >50.000h	

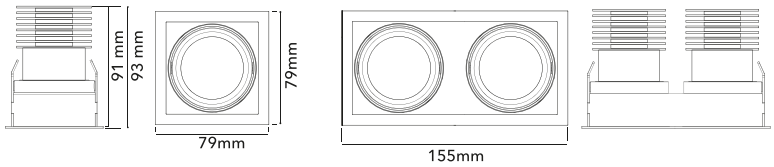







01 04

Round 35

Circular LED recessed fix downlight with direct radiation. Body built in policarbonate injection. Equipped with passive dissipation LED module opal diffuser.

EM336

35W

90°

4000K

3325

95lm

CRI 80lm/W

L70 >50.000h

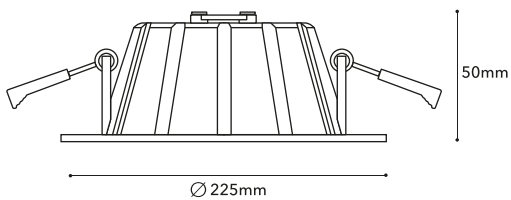

L,C PHASE-CUT IGBT/TRIAC

I O ON /OFF

01

THD <0.20 | PF >0.90 | McA 3 | 0,5m | 650° | CE | IP 44 | 220 VAC | 196mm | ELEC int.

Arcand

Square LED recessed fix downlight with direct radiation. Body built in aluminium sheet and injected aluminium ring with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM054	EM052	EM055
	31W	2x31W	3x31W
	17º-24º-40º-60°	17º-24º-40º-60°	17º-24º-40º-60°
	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
	2914lm 3142lm 3131lm	2x2914lm 2x3142lm 2x3131lm	3x2914lm 3x3142lm 3x3131lm
	94lm/W 101lm/W 101lm/W	94lm/W 101lm/W 101lm/W	94lm/W 101lm/W 101lm/W
CRI	90	90	90
	L70 >50.000h		

ACCESSORIES

Filter sculpture 25º-37º
Filter sculpture 21º-30º
Honeycomb (75mm)
Transparent glass (75mm)
Frosted glass (75mm)

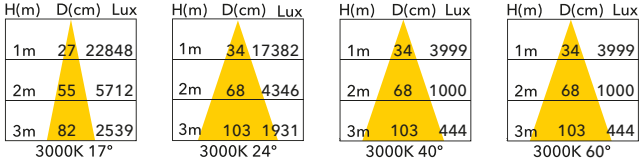

Disponible: 5000K o superior consultar **CRI95**

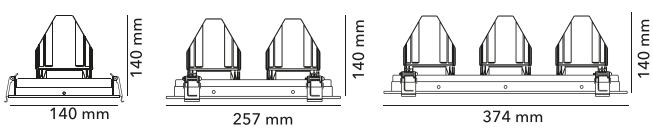

L,C
PHASE-CUT
IGBT/TRIAC

**Available 24W*

ON /OFF · 1-10V · PUSH · DALI

01 04

THD <0.20 · PF >0.90 · McA 3 · 0,5m · 850º · Emergency OPTIONAL · CE · IP 20 FL035 · IP 40 FL025 FL030 FL045 FL050 · 220 VAC · +15º -15º · 355º · ELEC incl. 130x130mm 240x130mm 355x130mm

Dani Trimless

Trimless Square LED recessed fix downlight with direct radiation. Body built in aluminium sheet and injected aluminium ring with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM120	EM121	EM122
	31W	2x31W	3x31W
	17º-24º-40º-60°	17º-24º-40º-60°	17º-24º-40º-60°
	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
	2914lm 3142lm 3131lm	2x2914lm 2x3142lm 2x3131lm	3x2914lm 3x3142lm 3x3131lm
	94lm/W 101lm/W 101lm/W	94lm/W 101lm/W 101lm/W	94lm/W 101lm/W 101lm/W
CRI	90	90	90
	L70 >50.000h		

ACCESSORIES

Filter sculpture 25º-37º
Filter sculpture 21º-37º
Honeycomb (75mm)
Transparent glass (75mm)
Frosted glass (75mm)



3000K 17°



3000K 24°



3000K 40°



3000K 60°

Disponible: 5000K o superior consultar **CRI95**

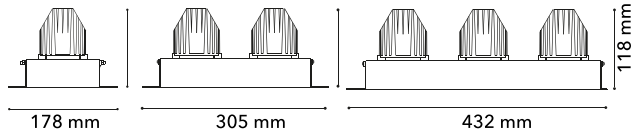

**Available 24W*

L,C
PHASE-CUT
IGBT/TRIAC

ON /OFF · 1-10V · PUSH · DALI

01 04

THD <0.20 · PF >0.90 · McA 3 · 0,5m · 850º · Emergency (OPTIONAL) · CE · IP 20 (FL035) · IP 40 (FL025, FL030, FL045, FL050) · 220 VAC · +15º -15º · 355º · ELEC incl.

120x120mm
240x120mm
374x120mm

Experiencia & Conocimiento
en un mismo lugar
Servicio Técnico
Autorizado

Prisma

Circular LED recessed tilting downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

EM030

31W

17°-24°-40°-60°

2700K
3000K
4000K

2914lm
3142lm
3131lm

94lm/W
101lm/W
101lm/W

CRI 90

L70 >50.000h

ACCESSORIES

Filter sculpture 25°-37°
Filter sculpture 21°-30°
Honeycomb (75mm)
Transparent glass (75mm)
Frosted glass (75mm)

H(m)	D(cm)	Lux
1m	27	22848
2m	55	5712
3m	82	2539

3000K 17°

H(m)	D(cm)	Lux
1m	34	17382
2m	68	4346
3m	103	1931

3000K 24°

H(m)	D(cm)	Lux
1m	34	3999
2m	68	1000
3m	103	444

3000K 40°

H(m)	D(cm)	Lux
1m	34	3999
2m	68	1000
3m	103	444

3000K 60°

Disponible:
5000K o superior consultar
CRI95



**Available 24W*

L,C
PHASE-CUT
IGBT/TRIAC

ON /OFF · 1-10V · PUSH · DALI

01 06 04

THD <0.20 · PF >0.90 · McA 3 · 0,5m · 850° · Emergency (OPTIONAL) · CE · IP 20 (FL035) · IP 40 (FL025 FL030 FL045 FL050) · 220 VAC · 355° · 117 mm · ELEC incl.

PETRALBES

Panel Light

Square LED recessed fix downlight with direct radiation. Body built in extruded aluminium. Opal diffuser UGR<19.

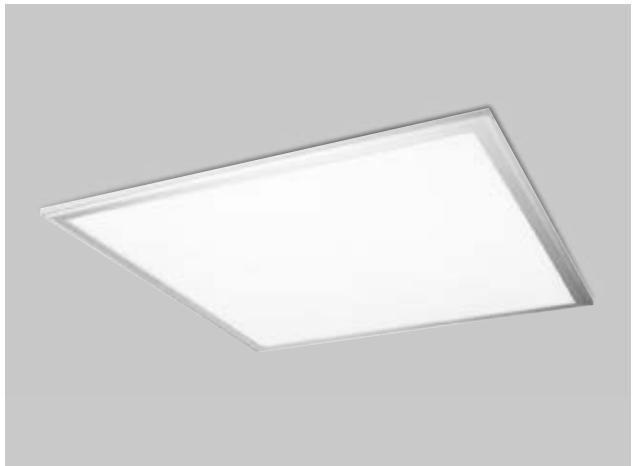

EM038

34W

120°

4000K

3600lm

106lm/W

CRI >90

L70 >50.000h

H(m)	D(cm)	Lux
1m	307	1242
2m	614	310
3m	920	138

4000K 120°



ON /OFF · 1-10V · PUSH · DALI

02

THD <0.20 · PF >0.90 · McA 3 · 0,5m · 850° · Emergency (OPTIONAL) · IP 40 · 220 VAC · ELEC incl.

Sirk

Circular LED recessed fix downlight with direct radiation. Body built in aluminium injection with high performance optical lens. Equipped with passive dissipation LED module.

EM136

21W

90°

4000K

2000lm

95lm/W

CRI >80

L70 >50.000h

H(m)	D(cm)	Lux
1m	202	1613
2m	404	403
3m	569	179

4000K 90°

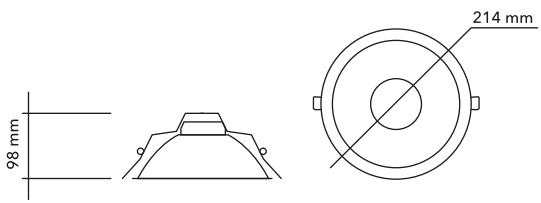





OPTIONAL

01 04

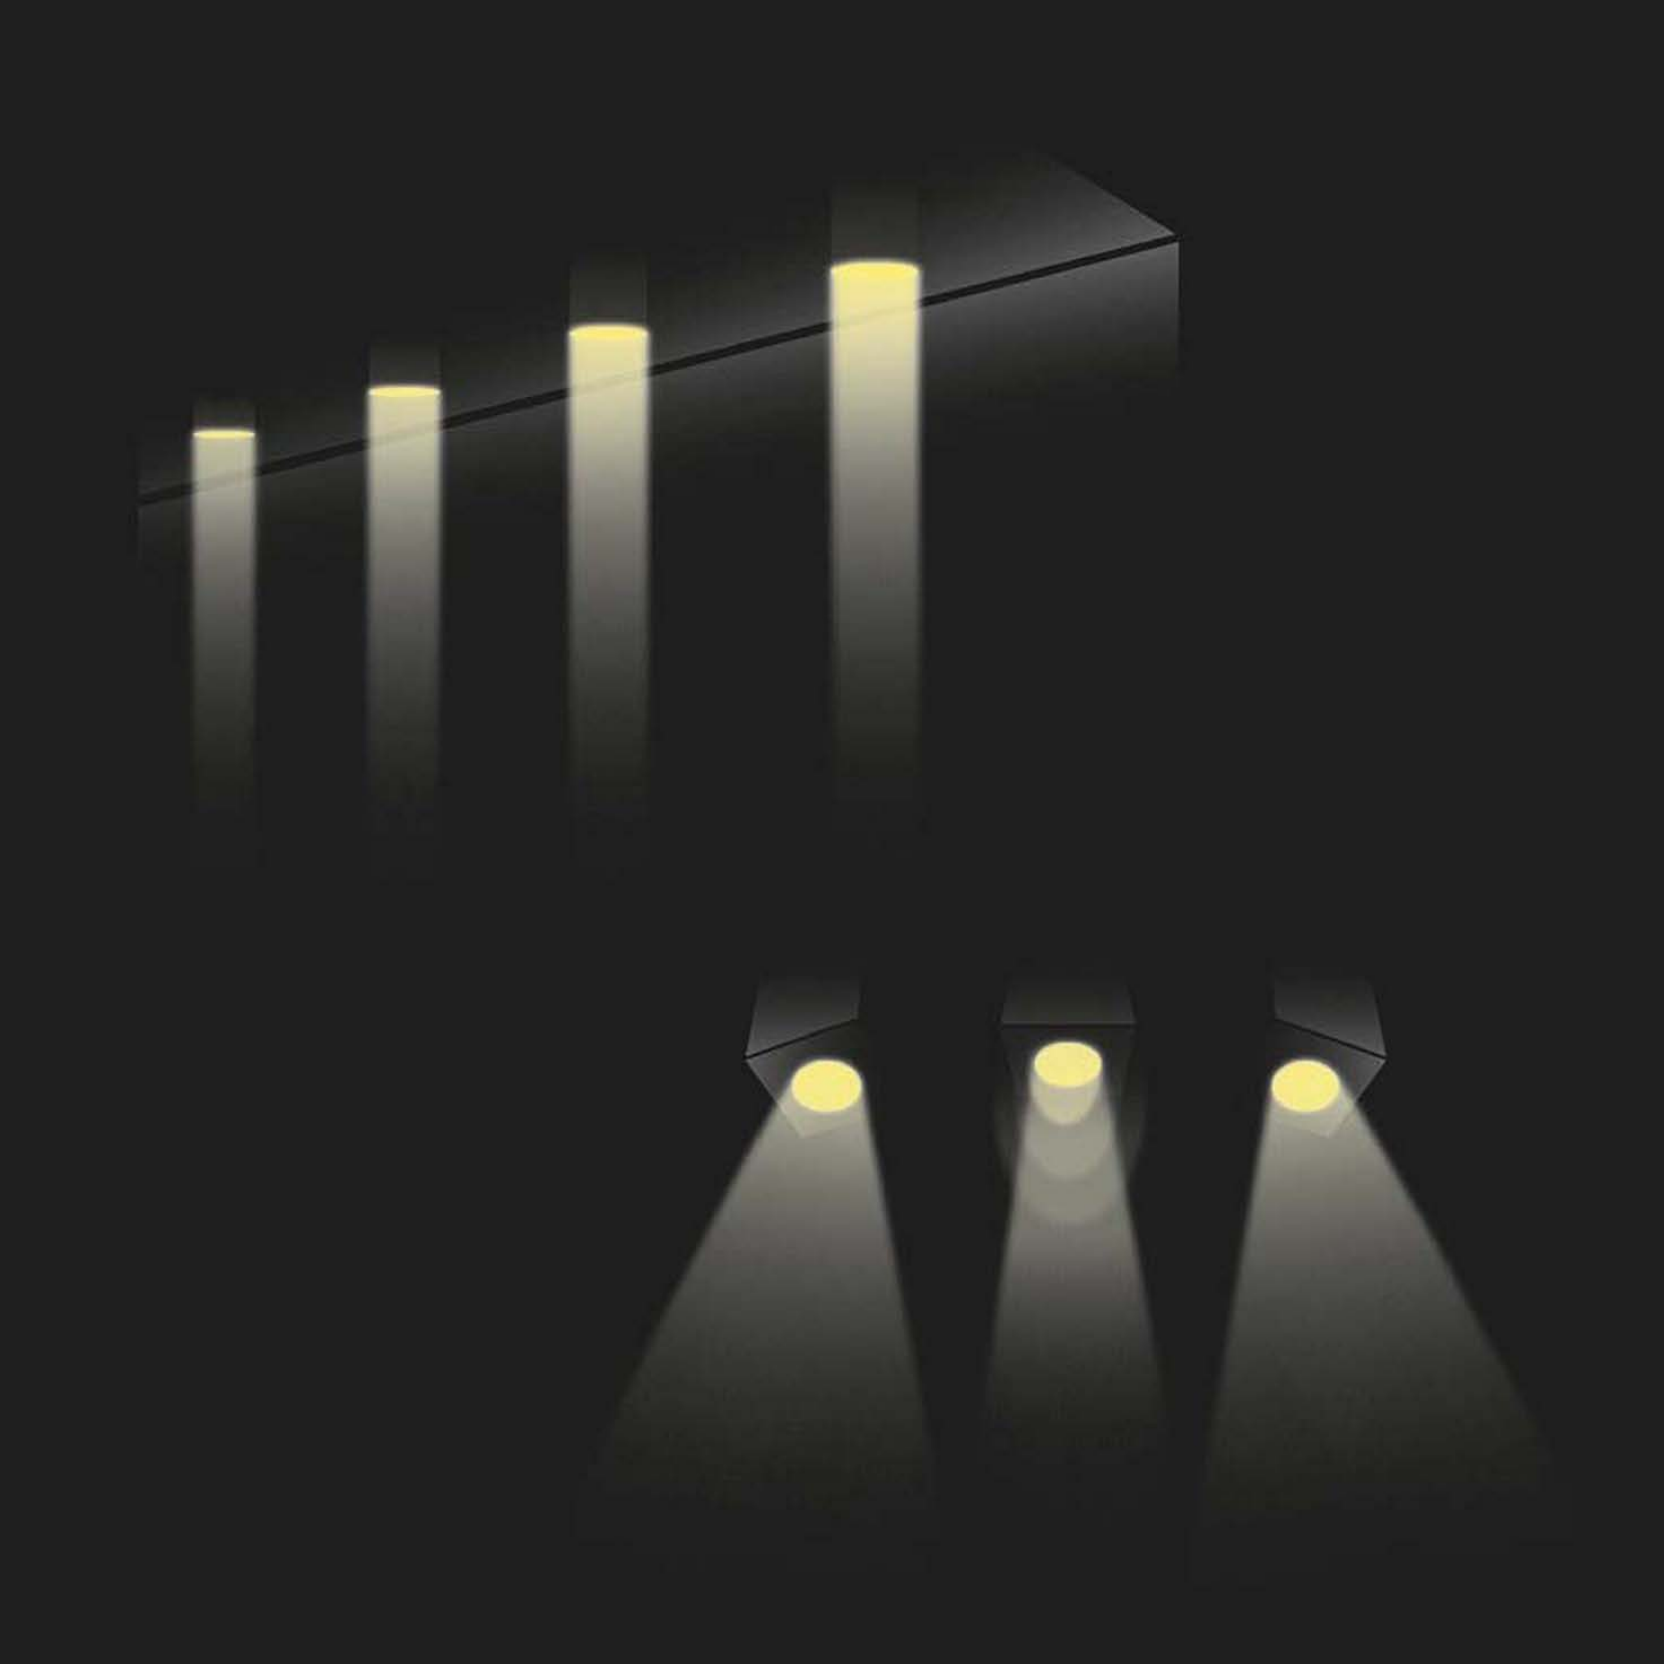

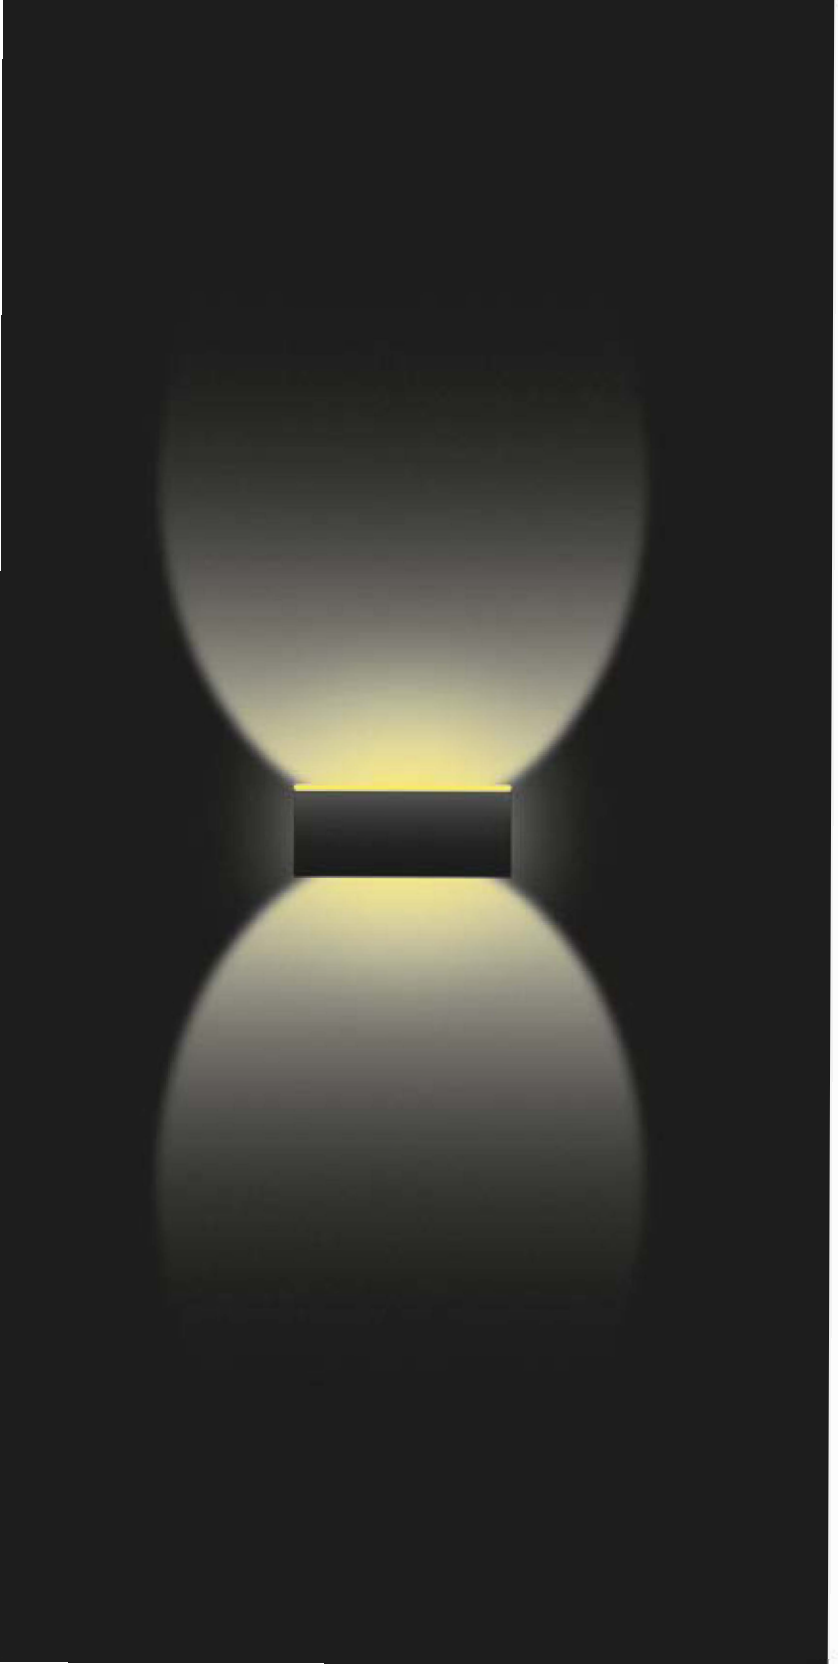

SURFACE

Cilinder

Circular LED surface tilting downlight with direct radiation with transparent glass. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

SP004

8W

40°

3000K
4000K

640lm
731lm

80lm/W
91lm/W

CRI >80

L70 >50.000h





01 06 04

McA 3 | 850° | 0,5m | CE | IP 40 | 220 VAC | +15° -15° | ELEC int.

Cube

Square LED surface tilting downlight with direct radiation with transparent glass. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

SP003

8W

40°

3000K
4000K

640lm
731lm

80lm/W
91lm/W

CRI >80

L70 >50.000h





01 06 04

Borga

Circular LED surface fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

SP100

12W

15°-24°-40°-60°

3000K
4000K

1217lm
1224lm

87lm/W
94lm/W

CRI 90

L70 >50.000h



H(m)	D(cm)	Lux
1m	26	9348
2m	51	2337
3m	77	1039

3000K 15°

H(m)	D(cm)	Lux
1m	42	4479
2m	84	1120
3m	125	498

3000K 24°

H(m)	D(cm)	Lux
1m	74	2192
2m	147	548
3m	221	224

3000K 40°

H(m)	D(cm)	Lux
1m	101	1466
2m	202	367
3m	303	163

3000K 60°

*Bajo producción
*Under production

L,C PHASE-CUT IGBT/TRIAC · 1-10V · DALI · ON /OFF

01 06 04

850º · 0,5m · McA 3 · CE · IP 20 · 220 VAC · ELEC int.

CATCH OF THE DAY
OCTOPUS OFFER!!
•CLAMS
•MUSSELS

Borbo

Circular LED surface fix downlight with direct radiation. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

SP101

24W

17°-24°-40°-60°

3000K
4000K

2511lm
2503lm

105lm/W
104lm/W

CRI 90

L70 >50.000h



H(m)	D(cm)	Lux
1m	26	19288
2m	51	4822
3m	77	2143

3000K 17°

H(m)	D(cm)	Lux
1m	42	9240
2m	84	2310
3m	125	1027

3000K 24°

H(m)	D(cm)	Lux
1m	74	4522
2m	147	1130
3m	221	502

3000K 40°

H(m)	D(cm)	Lux
1m	101	3025
2m	202	756
3m	303	336

3000K 60°

**Under production*

L,C PHASE-CUT IGBT/TRIAC · 1-10V · DALI · ON /OFF

01 06 04

THD <0,2 · PF >0.90 · 850° · 0,5m · McA 3 · CE · IP 20 · 220 VAC · ELEC int.

Hunna

Oval surface LED fix wall light with direct/indirect radiation. Body built in aluminium injection.

SP005

7W

-

3000K

420lm

60lm/W

CRI 80

L70 >50.000h



ON/OFF

L,C PHASE-CUT IGBT/TRIAC

01 06 04

McA 3 | 850° | 0,5m | CE | IP 20 | 220 VAC | ELEC int.

Lis

Swivel LED surface flexo with direct radiation. Body built in sheet steel with high performance optical lens. On-off push button and blue light control in off position.

SP009

5W

10°

2700K

140lm

28lm/W

CRI >85

L70 >50.000h

H(m)	D(cm)	Lux
1m	17	1241
2m	36	310
3m	52	138

2700K 10°



01

850°

0,5m

McA 3

IP 20

220 VAC

ELEC int.

LIFE IS
BEAUTIFUL
LIFE IS
BEAUTY

Mock

LED line available in 6 different lenghts. With built-in driver. Complete with mounting clamps and feed cable. Can be assempled in line with max 8 pcs.

	SP009	SP009	SP009	SP009	SP009	SP009
	4W	7W	10W	12W	14W	18W
	120°	120°	120°	120°	120°	120°
	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K
	360lm 360lm	630lm 630lm	900lm 900lm	1080lm 1080lm	1260lm 1260lm	1500lm 1500lm
	90lm/W 90lm/W	90lm/W 90lm/W	90lm/W 90lm/W	90lm/W 90lm/W	90lm/W 90lm/W	83lm/W 83lm/W
CRI	>90	>90	>90	>90	>90	>90

L70 >50.000h

296mm
596mm
896mm
996mm
1196mm
1496mm





**Connection cable 300mm Feed cable 2000mm*

ON/OFF

01

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC int.

SPOTLIGHTS & TRACKS

Top Torch

LED projector for three-phase rail. Body built in aluminium injection with high performance adjustable optical lens. Equipped with passive dissipation LED module.

PC006 ADJ

26W

Regulable
20° to 60°

3000K
4000K

2888lm
3060lm

87lm/W
93lm/W

CRI 90

L70 >50.000h

H(m)	D(cm)	Lux
1m	33	16450
2m	65	4112
3m	97	1827

3000K 20°

H(m)	D(cm)	Lux
1m	103	3581
2m	207	895
3m	311	397

3000K 60°

ACCESORIES

Base Fix Point





*31W disponible
*31W available

ON /OFF

*Consult about dimming options

ON /OFF

01 04

THD <0.20 | PF >0.9 | 850º | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90° -90° | 355° | ELEC int.

SEGWAY

Zoom Torch

LED projector for three-phase rail. Body built in aluminium injection with high performance adjustable optical lens. Equipped with passive dissipation LED module.

PC601

16W

Regulable
5° to 50°

2700K
4000K

6561lm
6561lm

410lm/W
410lm/W

CRI 90

L70 >50.000h

ACCESORIES

Base Fix Point



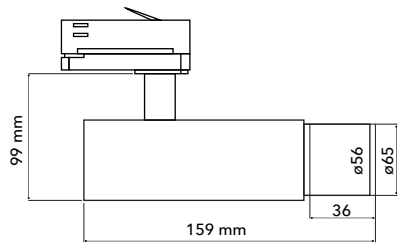

H(m)	D(cm)	Lux
1m	20	74756
2m	39	2470
3m	59	1098

3000K 5°

H(m)	D(cm)	Lux
1m	68	9881
2m	135	2470
3m	203	1098

3000K 30°

H(m)	D(cm)	Lux
1m	99	7205
2m	199	1801
3m	298	801

3000K 50°

ON / OFF

01 04

THD <0.20 | PF >0.9 | 850º | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90º -90º | 355º | ELEC int.

AFRICA

Lit Torch 12W

LED projector for three-phase rail. Body built in aluminium injection. Equipped with passive dissipation LED module.

PC502 Deep Anti-Glare system with Optical lens
PC504 Deep Anti-Glare system with Specular reflector

12W

15°
36°

2700K
3000K
4000K

	Optical lens	Specular reflector
	800lm	680lm
	900lm	760lm
	1100lm	940lm
	67lm/W	57lm/W
	75lm/W	63lm/W
	92lm/W	78lm/W

CRI 90

L70 >50.000h

H(m)	D(cm)	Lux
1m	26	6913
2m	51	1728
3m	77	768

3000K 15°

H(m)	D(cm)	Lux
1m	68	2327
2m	137	582
3m	205	258

3000K 36°

BASE / *BASE*

1-Phase Track

ACCESORIES

Base Fix Point





ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

850° · 0,5m · McA 3 · CE · IP 20 · 220 VAC · +90° -90° · 355° · ELEC int.

Lit Torch projector's range

Deep anti-glare system

With a small construction size, anti-glare structures with depth lens guarantee a soft and comfortable light output for directional lighting. Two types of optics Reflector and lens.

Lit Torch 30W

LED projector for three-phase rail. Body built in aluminium injection. Equipped with passive dissipation LED module.

PC503 Deep Anti-Glare system with Optical lens
PC505 Deep Anti-Glare system with Specular reflector

30W

15°
36°

2700K
3000K
4000K

	Optical lens	Specular reflector
	2190lm	1860lm
	2530lm	2140lm
	2700lm	2280lm
	73lm/W	62lm/W
	84lm/W	71lm/W
	90lm/W	76lm/W

CRI 90

L70 >50.000h



BASE

1-Phase Track

ACCESORIES

Base Fix Point



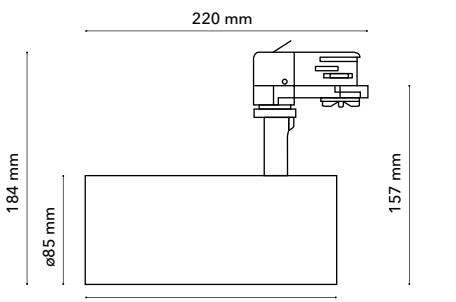



01 04

Lit Torch projector's range

Deep anti-glare system

Tuba

LED projector for three-phase rail. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

PC006

13W

17°-40°

3000K
4000K

913lm
991lm

70lm/W
76lm/W

CRI >85

L70 >50.000h

H(m)	D(cm)	Lux
1m	26	7013
2m	51	1753
3m	77	779

3000K 17°

H(m)	D(cm)	Lux
1m	74	1644
2m	147	411
3m	221	183

3000K 40°

BASE ACCESSORY



ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

850° · 0,5m · McA 3 · IP 20 · 220 VAC · +90° -90° · 355° · ELEC int.

01 04

TAPES LA VERMUTERIA
AL TANTU!
VINS I CAVES
A
COPES

Mega Track

LED projector for three-phase rail. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

PC110

33W

17º-24º-40º-60º

2700K
3000K
4000K

2463lm
2888lm
3060lm

75lm/W
87lm/W
93lm/W

CRI 90

L70 >50.000h

ACCESORIOS / *ACCESORIES*

ACC0170 | Base Fix Point

ACC0018 | Ceiling Base

ACCESORIES

Honeycomb

Sculpture filter 25º-37º

Sculpture filter 21º-30º



H(m)	D(cm)	Lux
1m	27	21398
2m	53	5350
3m	80	2377

3000K 17°

H(m)	D(cm)	Lux
1m	33	16450
2m	65	4112
3m	97	1827

3000K 24°

H(m)	D(cm)	Lux
1m	70	5211
2m	139	1303
3m	209	579

3000K 40°

H(m)	D(cm)	Lux
1m	103	3581
2m	207	895
3m	311	397

3000K 60°

L,C PHASE-CUT

*Disponible en 26W
*Available 26W

ON /OFF | 1-10V | PUSH | DALI

01 06 04

THD <0.20 | PF >0.9 | 850º | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90º -90º | 355º | ELEC int.

SOMNIKA

Pin

LED projector for one-phase rail. Body built in aluminium injection with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

PC1001

7W

15°

3000K

603lm

86lm/W

CRI 90

L70 >50.000h

H(m)	D(cm)	Lux
1m	41	2098
2m	83	524
3m	124	233

3000K 15°

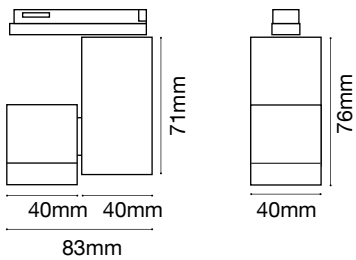

**Consult about Base*

ON /OFF

01 04

850° 0,5m McA 3 CE IP 20 220 VAC +90° -90° 355° ELEC int.

Cenit

LED projector for three-phase rail. Body built in aluminium injection equipped with pasive disipation LED module and highly concentres TIR lens.

PC900

4W

4°

3000K

174lm

44lm/W

CRI 90

L70 >50.000h

H(m)	D(cm)	Lux
1m	6	17231
2m	12	4308
3m	18	1915

3000K 4°

ACCESORIES

Base Fix Point



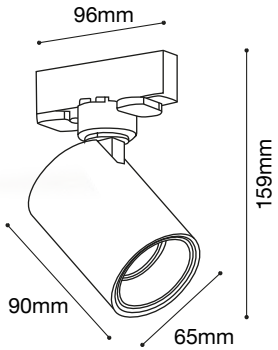

ON /OFF

01 04

850º | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90º -90º | 355º | ELEC int.

Ciblar

LED projector for three-phase rail. Body built in aluminium injection equipped with LED reflector lamp.

PC004

15W

20º-45º

2700K

750lm

48lm/w

CRI >85

L70 >50.000h

H(m)	D(cm)	Lux
1m	32	5056
2m	65	1264
3m	97	562

2700K 20°

H(m)	D(cm)	Lux
1m	74	976
2m	149	244
3m	223	108

2700K 45°

ACCESORIES

Base Fix Point





ON /OFF

L,C PHASE-CUT IGBT/TRIAC

01 04

850º | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90º -90º | 355º | ELEC int.

Nika

Wall-e a combination of technology and aesthetics. It offers a wide variety of options to create the design effect. The wallwasher functions are ideal for backlight applications. Wall-E uses Lumiled / Samsung LED technology.

PC701

30W

25x90°

3500K

3000lm

100lm/W

CRI 90

L70 >50.000h

ON /OFF

01 04

McA 3 | CE | IP 20 | 220 VAC | ELEC int.

Three Circuit Track

01 06 04	**PC020**	*Three-phase track 1m*
01 06 04	**PC021**	*Three phase-track 2m*
01 06 04	**PC022**	*Three phase-track 3 m*
01 06 04	**PC023**	*Recessed three-phase track 1m*
01 06 04	**PC024**	*Recessed three-phase track 2m*
01 06 04	**PC025**	*Recessed three-phase track 3m*





Track with protocol DALI, 1-10V, etc – please consult

01 06 04	**PC030**	*Right supply*
01 06 04	**PC031**	*Left supply*





01 06 04	PC032	*Intermediate connection*	
01 06 04	PC033	*90º right connection*	
01 06 04	PC034	*90º left connection*	
01 06 04	PC035	*90º adjustable connection*	
01 06 04	PC036	*T connection type A*	
01 06 04	PC037	*T connection type B*	
01 06 04	PC038	*T connection type AC*	
01 06 04	PC039	*T-connection type D*	
01 06 04	PC040	*X-connection*	
01 06 04	PC041	*End cap*	
01 06 04	PC042	*Ceiling bracket*	
01 06 04	PC043	*Suspension kit 1,5m*	

Lens

As accessories for our spotlights, we offer specific filters to optimize the use of the light obtaining the light effects adapted to the space of different environments. The sculptural filters allows us to generate "elliptical" projection of the light beam.

The honeycomb filter creates a softened light and reduces the glare effects that could result of a direct projected beam to the space or object.

ACCESSORIES

Sculpture filter 25º-37º
Sculpture filter 21º-30º
Honeycomb

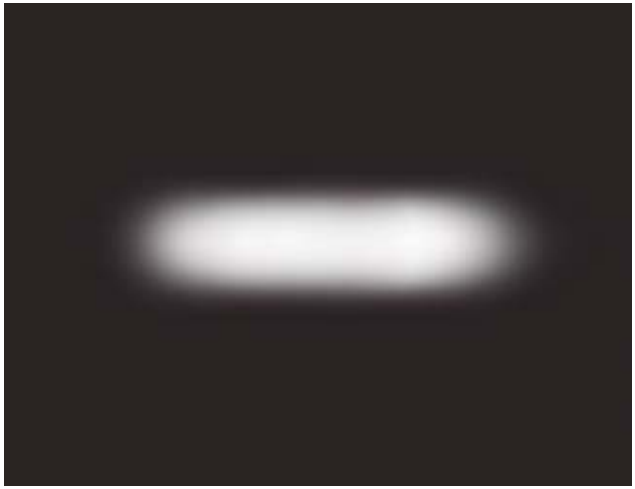

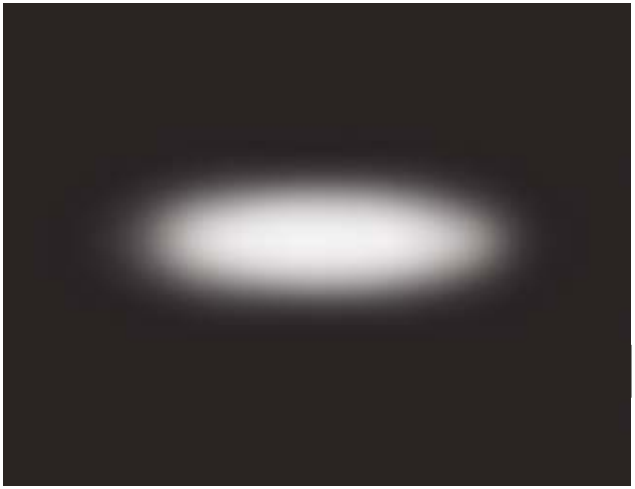

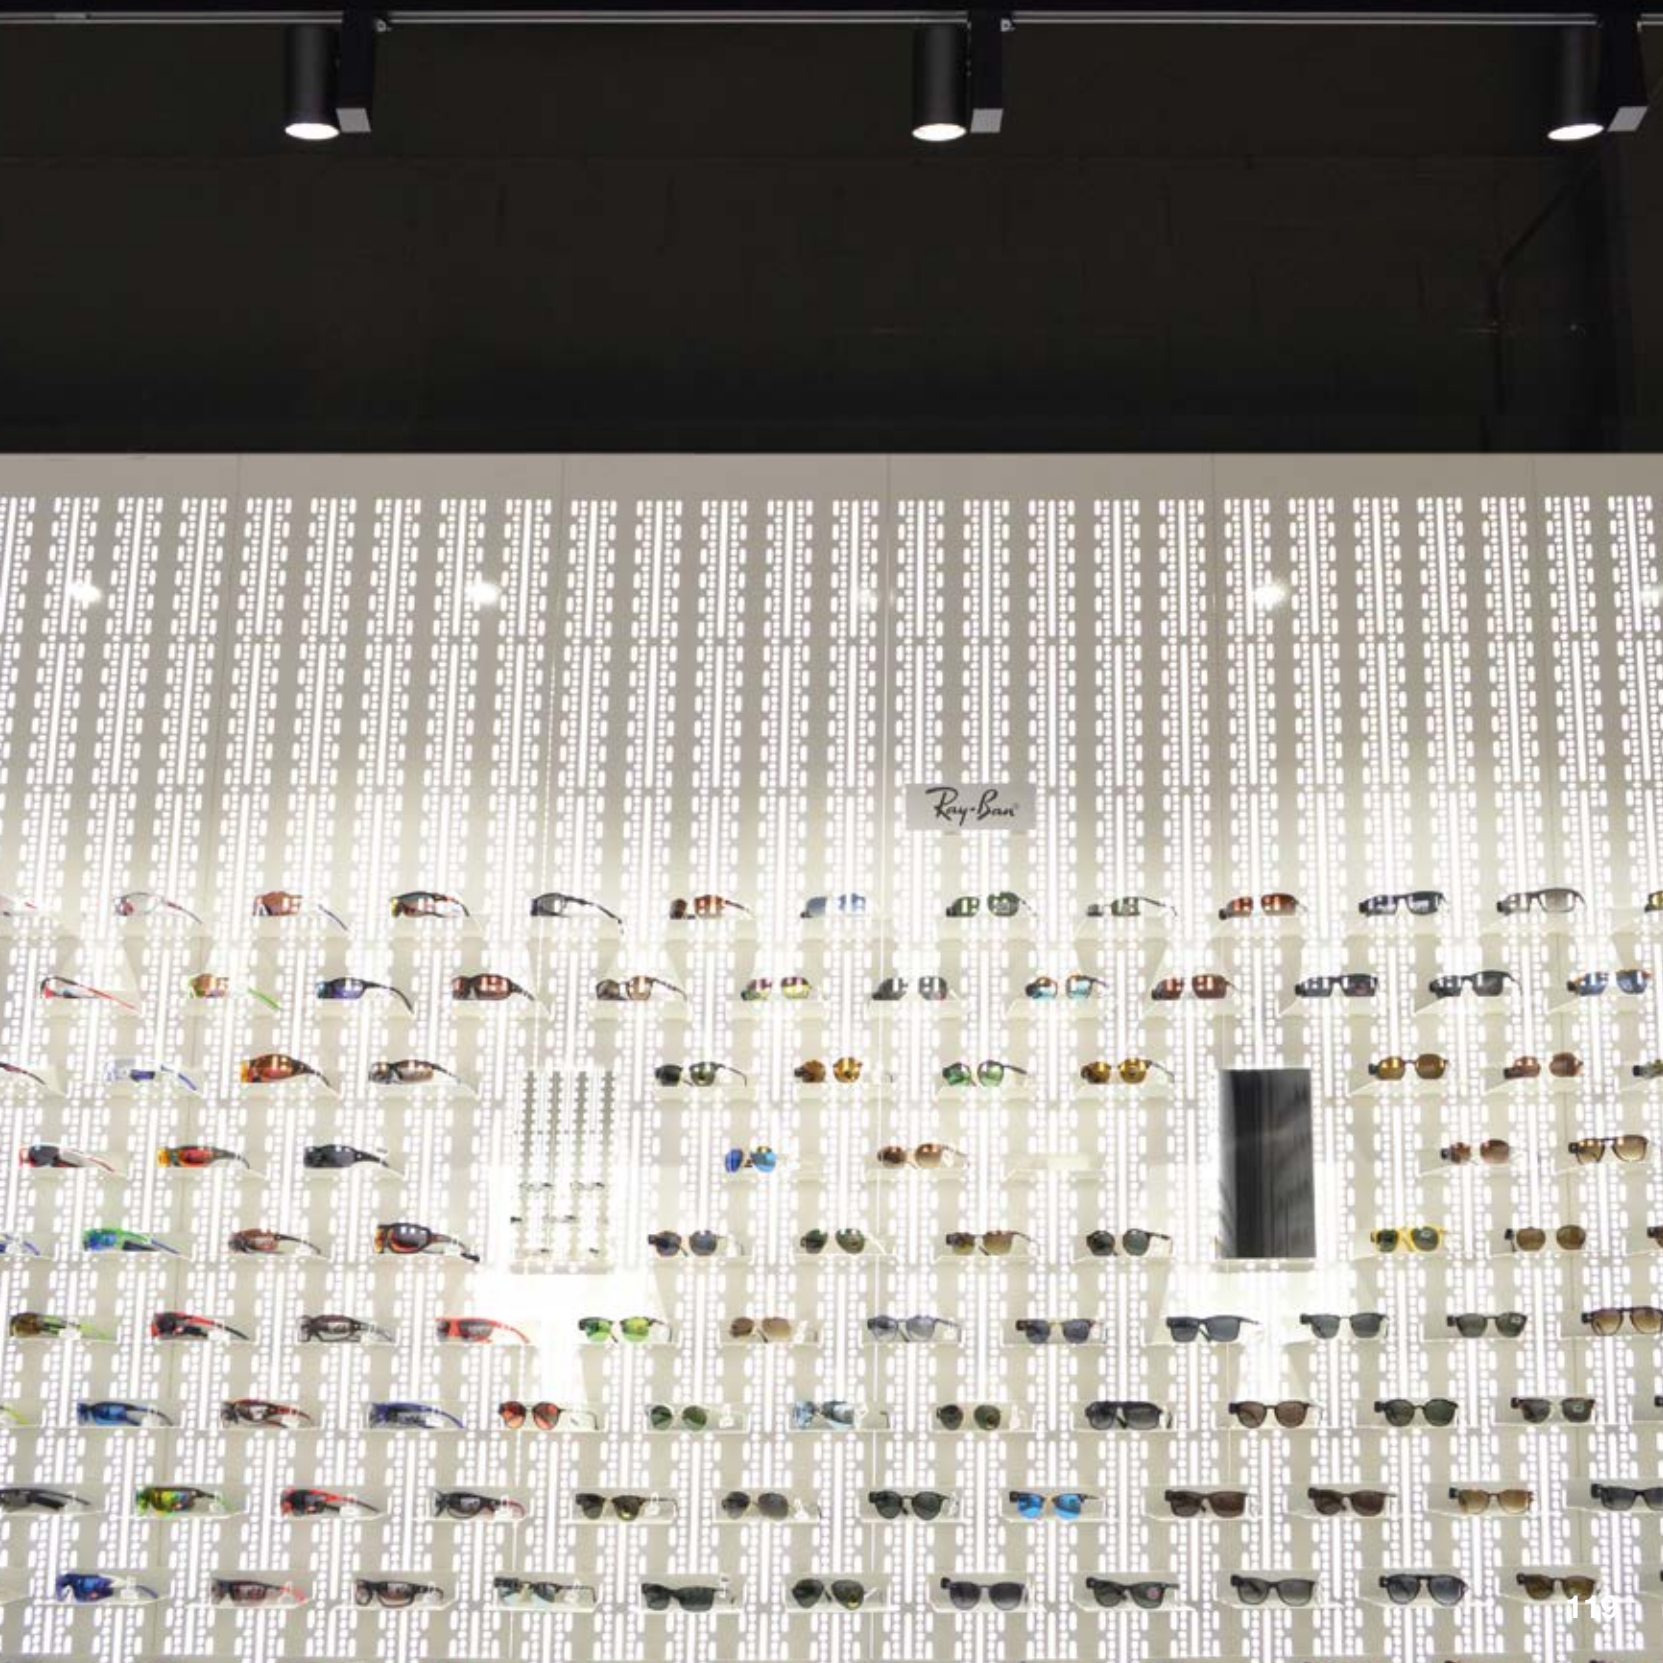
Ray-Ban

Rail System Plus

Low voltage electrified rail system with luminaire anchorage using a high power magnetic system.

Optimized design to ensure constant tension in lengths up to 50m.

Simple and elegant design. Available in surface, suspended and recessed version.
Availability of DALI system without changing the track.

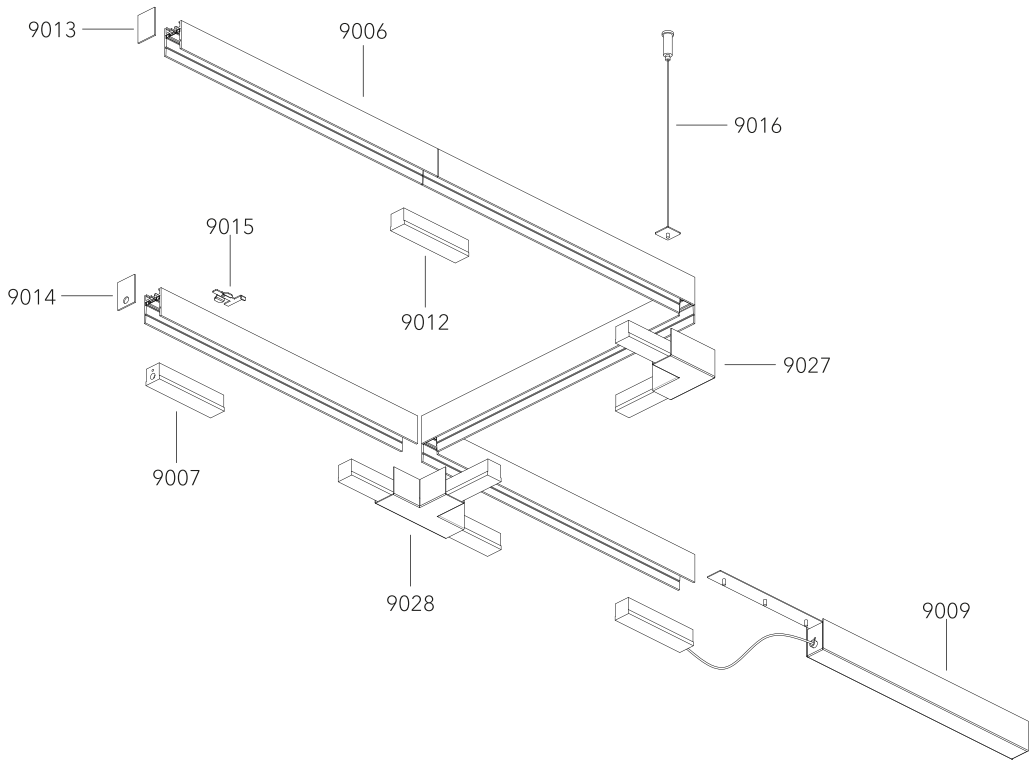

04

01

Accesories

Magnetic track built with aluminum profile.

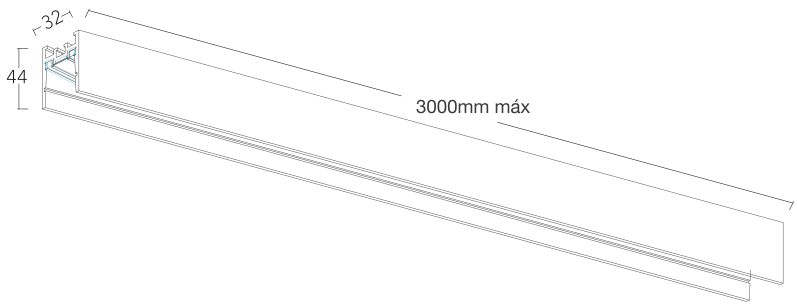

Magnetic power supply with remote driver.



Electrified magnetic lineal connection.



End cap.



End cap with hole.



Surface anchorage.



Suspension kit with steel wire 1250 mm.

Omega type anchorage for recessed mounting.



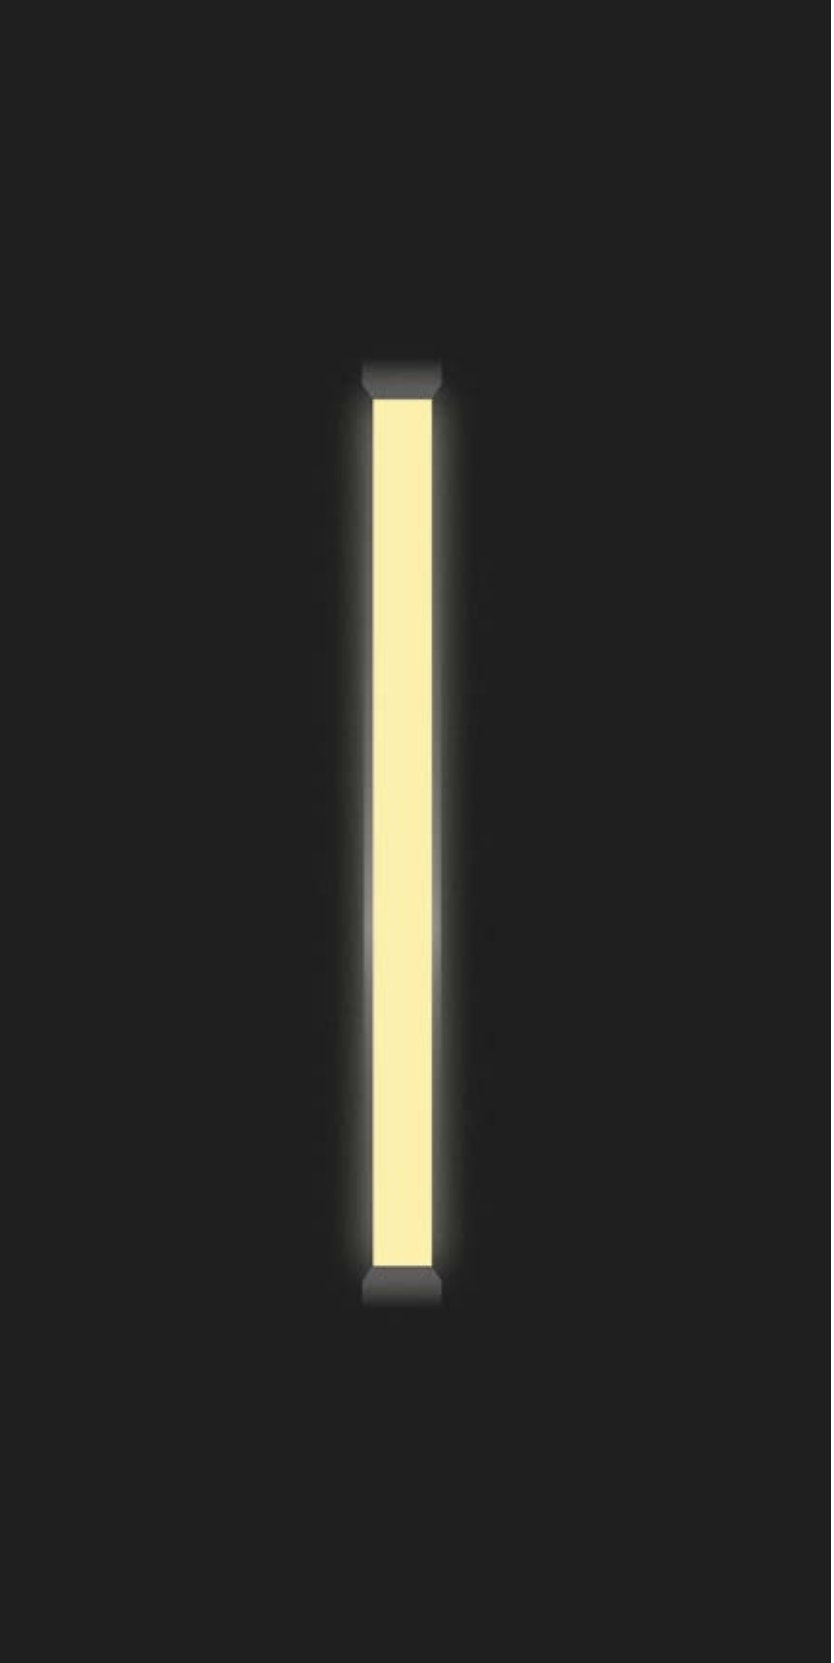

INDUSTRIAL

Undis

Rectangular LED surface celing fix luminary with direct radiation. Body built in extruded aluminium with five types optical lens, equipped with LED module.

	G2	G4	G6
	25W	49W	74W
	60° 90° 90° x45° 25° Double Asymmetric 20° Lenses asymetric		
	3000K 4000K	3000K 4000K	3000K 4000K
	3190lm 3330lm	6380lm 6660lm	9570lm 9990lm
	127lm/W 133lm/W	130lm/W 136lm/W	129lm/W 135lm/W
CRI	>80	>80	>80
	L80>55.000h		



G2 576mm

G4 1148mm

G6 1720mm



01 04

OPTIONAL

Estanc

LED celling luminarie and wall fixtures for wet rooms and covered outdoor areas.

1700469-B

52W

120°

4000K

5600lm

110lm/W

CRI >80

L70 >50.000h



GREY

Industrial bay

Conical LED fix pendant with direct radiation. Body built in aluminium injection. Equipped with LED module.

SU150

150W

90° - 120°

4000K
5000K

15750lm
18000lm

105lm/W
120lm/W

CRI >80

L70 >50.000h

H(m)	D(cm)	Lux
1m	198	8325
2m	396	2059
3m	594	915

5000K 90°

H(m)	D(cm)	Lux
1m	243	7203
2m	487	1801
3m	730	800

5000K 120°

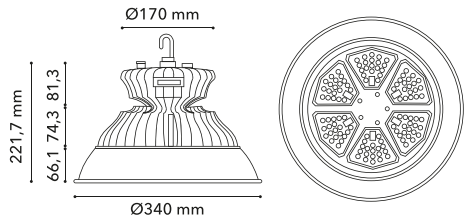

ON/OFF 1-10V

THD <0,2 | 850° | PF >0.9 | WORK T° -20°~40°C | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC incl.

01 06

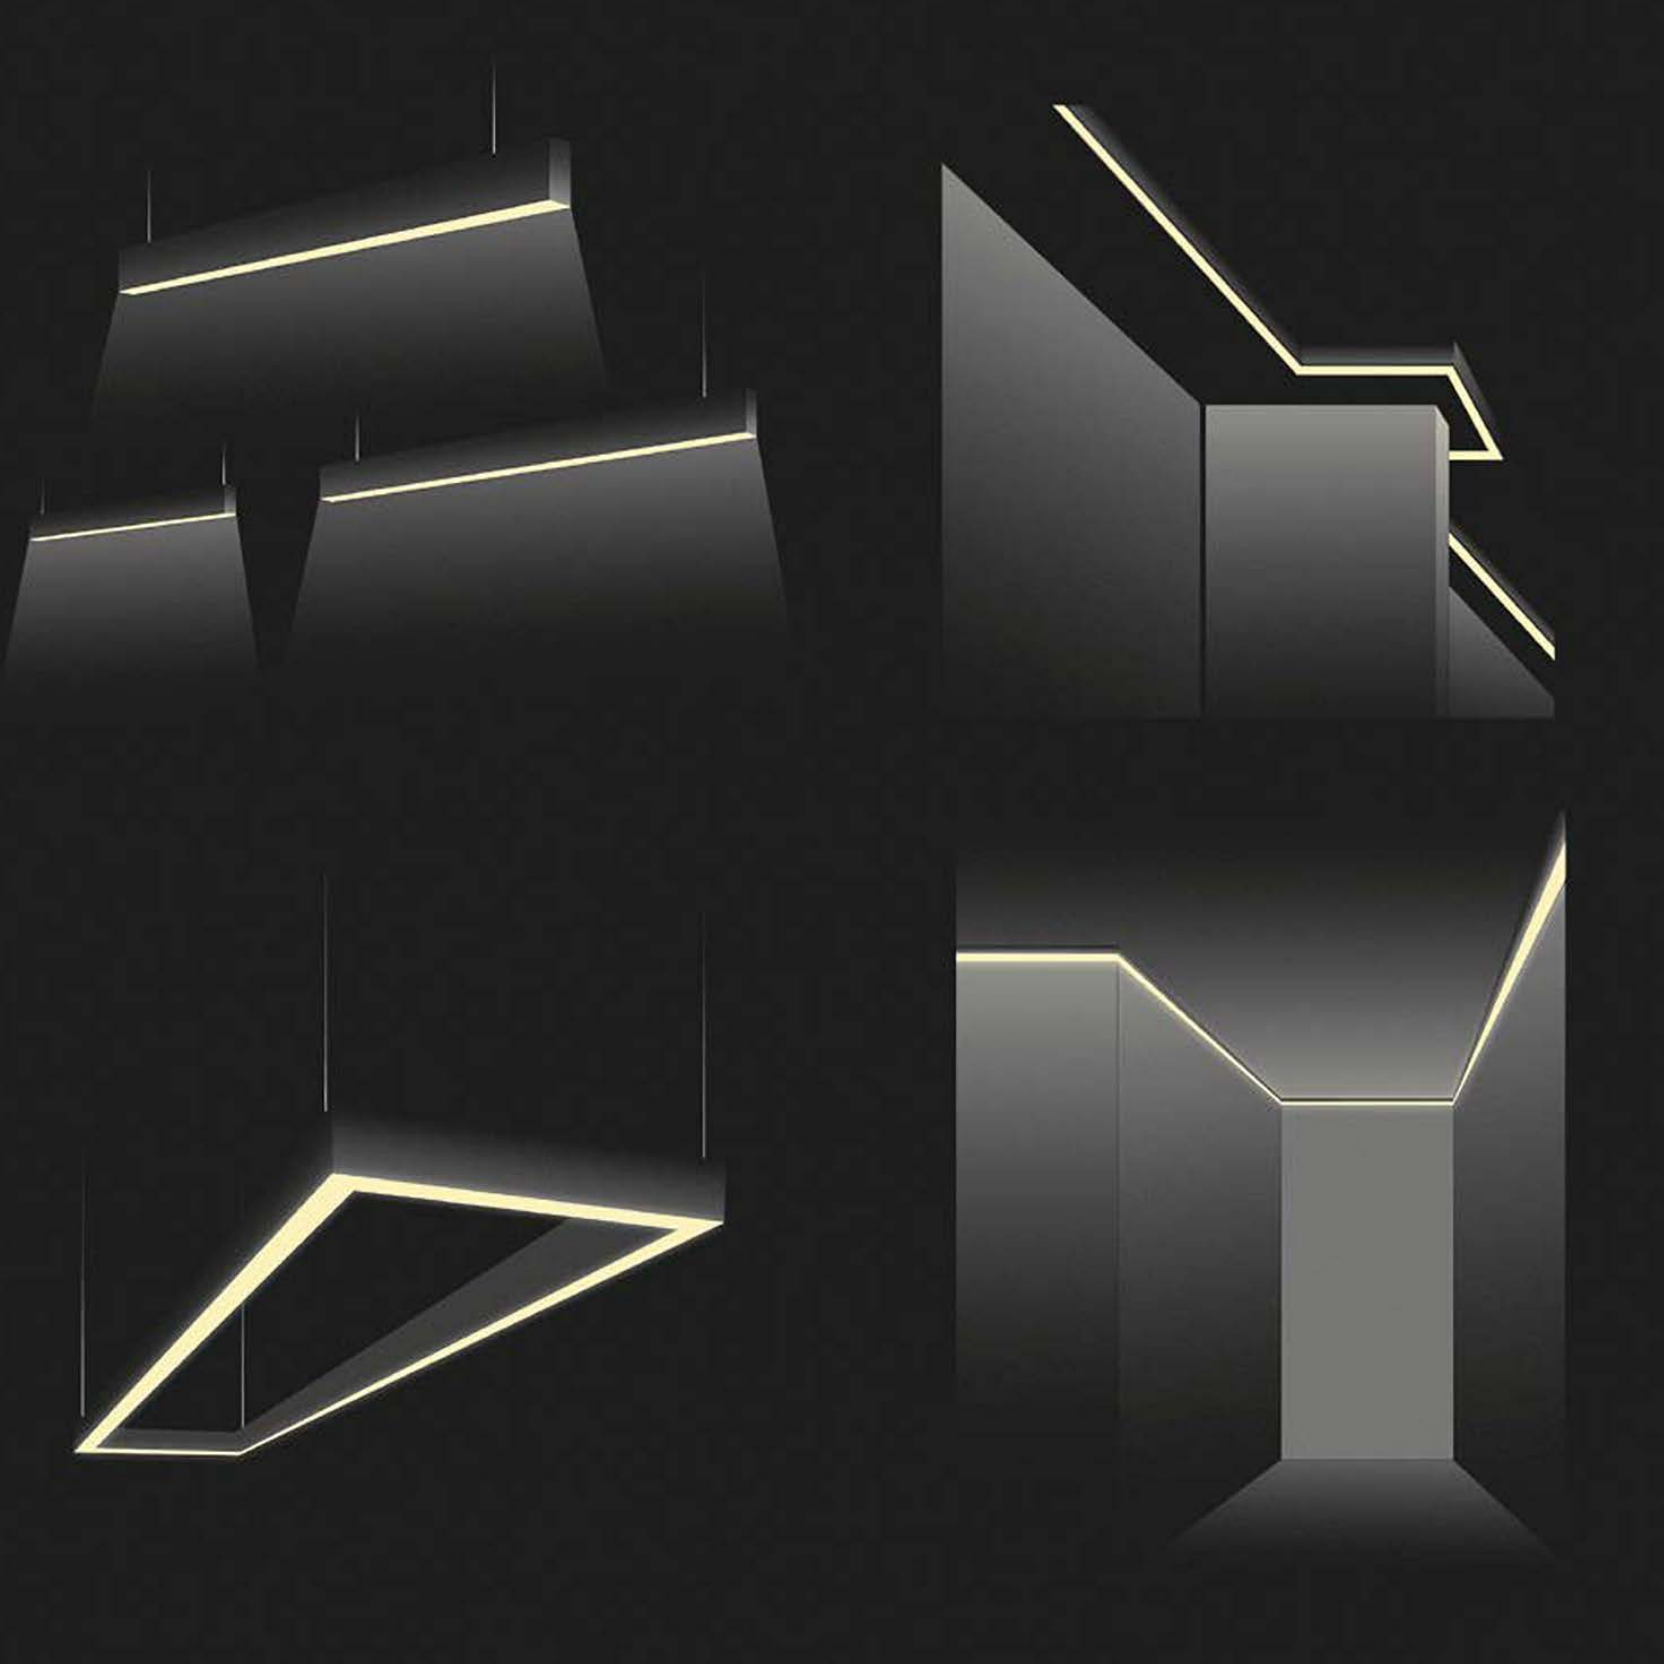

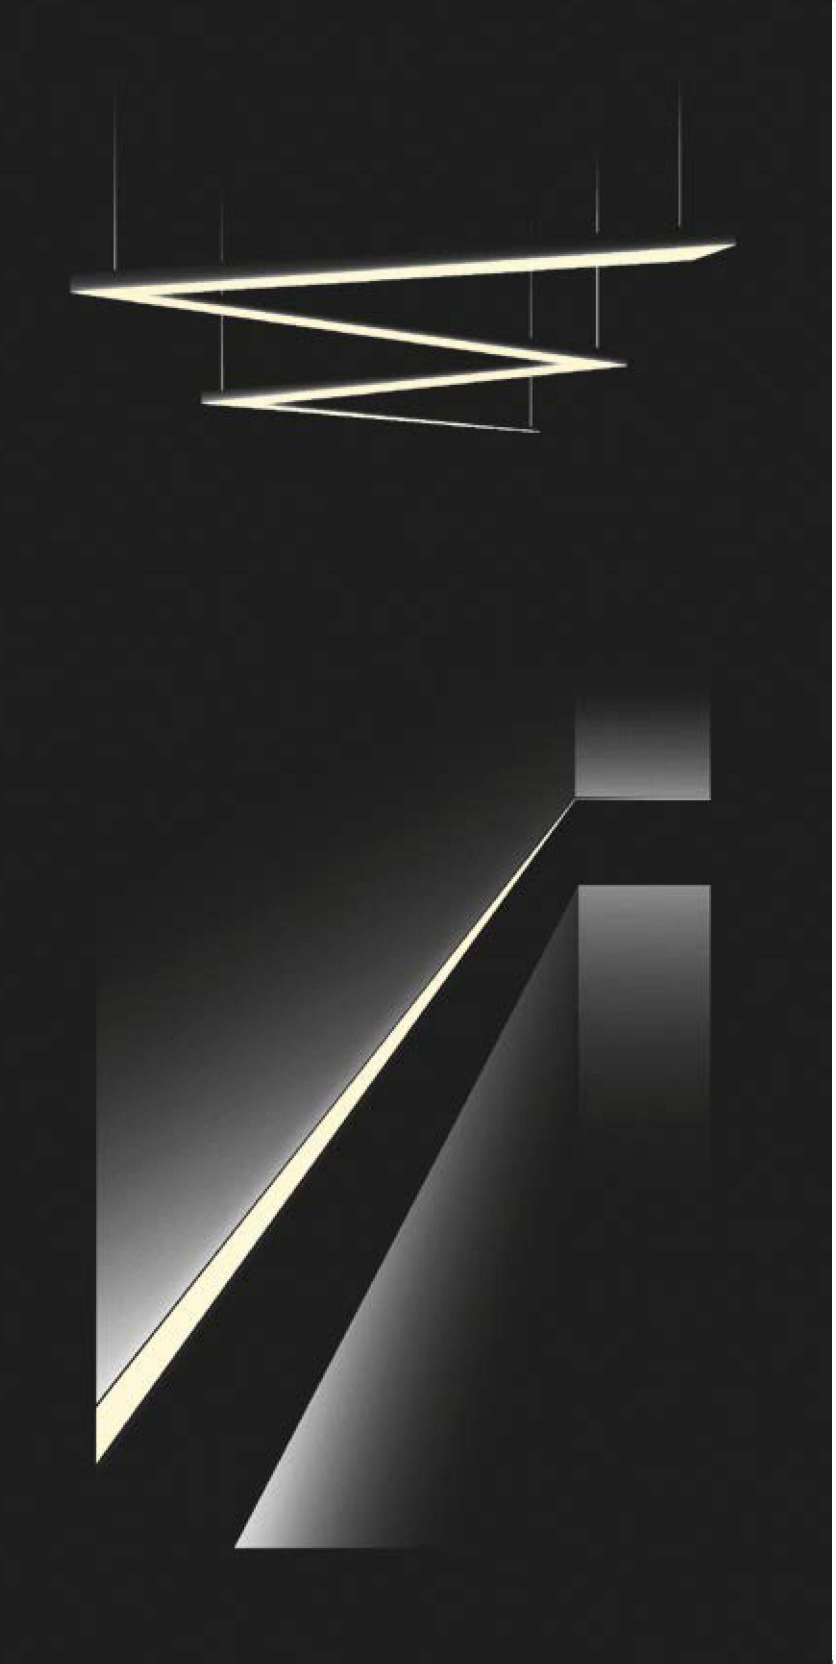

STRUCTURES

Rec

Rectangular LED recessed fix luminary with direct radiation. Body built in extruded aluminium with opal diffuser. Equipped with LED module.

	D2A	D4A	D6A	
	18W	36W	55W	
	120°	120°	120°	
	2700K	2700K	2700K	On request
	3000K	3000K	3000K	
	4000K	4000K	4000K	
	1370lm	2735lm	4105lm	
	1470lm	2940lm	4410lm	
	75lm/W	75lm/W	75lm/W	
	81lm/W	81lm/W	81lm/W	
CRI	80	80	80	
	L70 >50.000h			



D2A 610 mm
D4A 1170 mm
D6A 1730 mm

Custom made lenght until 2m.
>2m continuos lines without limits by module system.



OPTIONAL

D2A 614x37
D4A 1174x37
D6A 1734x37

01 06 04

Pur

Rectangular LED surface celing fix luminary with direct radiation. Body built in extruded aluminium with opal diffuser. Equipped with LED module.

	A2A	A4A	A6A	
	18W	36W	55W	
	120°	120°	120°	
	2700K	2700K	2700K	On request
	3000K	3000K	3000K	Bajo pedido
	4000K	4000K	4000K	
	1370lm 1470lm	2735lm 2940lm	4105lm 4410lm	
	75lm/W 81lm/W	75lm/W 81lm/W	75lm/W 81lm/W	
CRI	>80	>80	>80	
	L70 >50.000h			

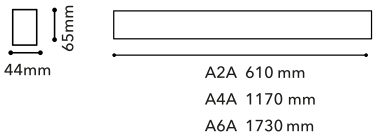

A2A 610 mm
A4A 1170 mm
A6A 1730 mm

Custom made lenght until 3m.
>3m continuos lines without limits by module system.

ON/OFF 1-10V PUSH DALI

01 06 04

THD <0,2 | PF >0.90 | McA 3 | 850º | 0,5m | Emergency OPTIONAL | CE | IP 40 | 220 VAC | ELEC int.

Tont D

Rectangular pendant LED fix luminary with direct radiation. Body built in extruded aluminium with opal diffuser. Equipped with LED module.

	C2A	C4A	C6A	
	18W	36W	55W	
	120°	120°	120°	
	2700K	2700K	2700K	On request
	3000K	3000K	3000K	
	4000K	4000K	4000K	
	1370lm	2735lm	4105lm	
	1470lm	2940lm	4410lm	
	75lm/W	75lm/W	75lm/W	
	81lm/W	81lm/W	81lm/W	
CRI	>80	>80	>80	
	L70 >50.000h			

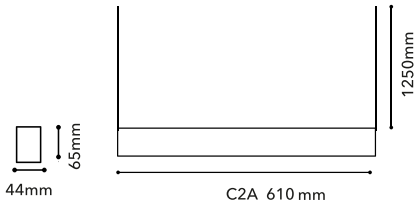

C2A 610 mm
C4A 1170 mm
C6A 1730 mm

Custom made lenght until 3m.
>3m continuos lines without limits by module system.

ON/OFF · 1-10V · PUSH · DALI

01 · 06 · 04

THD <0,2 · PF >0.9 · 850° · 0,5m · McA 3 · Emergency OPTIONAL · CE · IP 40 · 220 VAC · ELEC int.

Tont UD

Rectangular pendant LED fix luminary with direct/indirect radiation. Body built in extruded aluminium with opal diffuser. Equipped with LED module.

	F2A	F4A	F6A	
	2x18W	2x36W	2x55W	
	120°	120°	120°	
	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	On request
	2x1370lm 2x1470lm	2x2735lm 2x2940lm	2x4105lm 2x4410lm	
	75lm/W 81lm/W	75lm/W 81lm/W	75lm/W 81lm/W	
CRI	>80	>80	>80	
	L70 >50.000h			

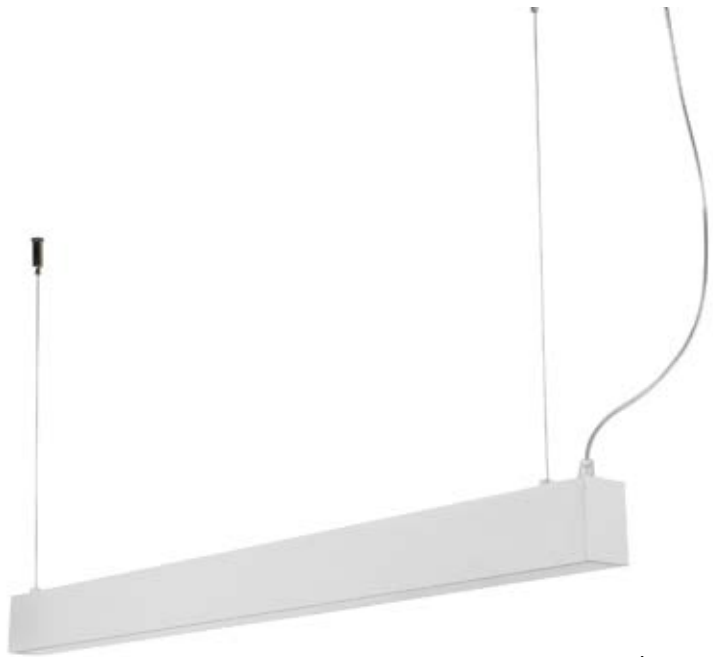

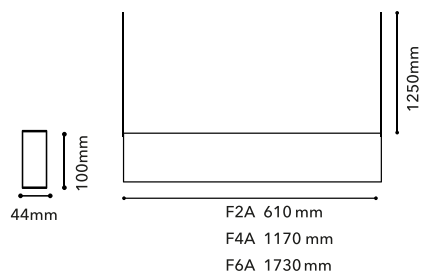

Custom made lenght until 3m.
>3m continuos lines without limits by module system.

ON/OFF 1-10V PUSH DALI

01 06 04

THD <0,2 | PF >0.9 | 850° | 0,5m | McA 3 | E Emergency (OPTIONAL) | CE | IP 40 | 220 VAC | ELEC int.

10

Smy D

Surface LED fix luminary with direct radiation. Body built in extruded aluminium with opal diffuser. Equipped with LED module.

	B2A	B4A	B6A	
	18W	36W	55W	
	120°	120°	120°	
	2700K	2700K	2700K	On request
	3000K	3000K	3000K	
	4000K	4000K	4000K	
	1370lm	2735lm	4105lm	
	1470lm	2940lm	4410lm	
	75lm/W	75lm/W	75lm/W	
	81lm/W	81lm/W	81lm/W	
CRI	>80	>80	>80	
	L70 >50.000h			



B2A 610mm
B4A 1170mm
B6A 1730mm

Custom made lenght until 3m.
>3m continuos lines without limits by module system.

ON/OFF 1-10V PUSH DALI

01 06 04

THD <0,2 | PF >0.90 | McA 3 | 850° | 0,5m | Emergency | CE | IP 40 | 220 VAC | ELEC int.

OPTIONAL

Smy UD

Rectangular surface LED fix luminary with direct/indirect radiation. Body built in extruded aluminium with opal diffuser. Equipped with LED module.

	E2A	E4A	E6A	
	28W	56W	84W	
	120°	120°	120°	
	2700K	2700K	2700K	On request
	3000K 4000K	3000K 4000K	3000K 4000K	
	2100lm 2280lm	4200lm 4560lm	6300lm 6840lm	
	75lm/W 81lm/W	75lm/W 81lm/W	75lm/W 81lm/W	
CRI	>80	>80	>80	
	L70 >50.000h			

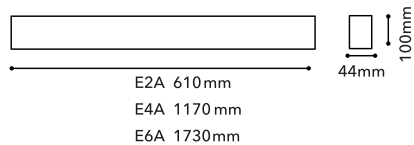

Custom made lenght until 3m.
>3m continuos lines without limits by module system.

ON/OFF 1-10V PUSH DALI

01 06 04

THD <0,2 | PF >0.9 | McA 3 | 850° | 0,5m | Emergency | CE | IP 40 | 220 VAC | ELEC int.

OPTIONAL

Nika Lin

Rectangular Downlight suspended LED with high efficiency specular reflector and low luminance. Built in aluminium with passive heatsink.



	Xtrem	Full	Zebra
	XC 403mm	YC 403mm	
	XG 935mm	YG 935mm	ZG 935mm
	XK 1467mm	YK 1467mm	ZK 1467mm
	XO 1999mm	YO 1999mm	ZO 1999mm
	12,4W	18,5W	-
	12,4W	47,2W	24,7W
	12,4W	67,8W	37W
	12,4W	93W	49,3W
	15º-30º-45º	15º-30º-45º	15º-30º-45º
	3000K	3000K	3000K
	4000K	4000K	4000K
	1000lm	1500lm	-
	1000lm	3500lm	2000lm
	1000lm	5500lm	3000lm
	1000lm	7500lm	4000lm
	81lm/W	81lm/W	-
	81lm/W	81lm/W	81lm/W
	81lm/W	81lm/W	81lm/W
	81lm/W	81lm/W	81lm/W
CRI	80	80	80
	L70 >50.000h	L70 >50.000h	L70 >50.000h

*Configuración por proyecto / *configuration per project*

ON/OFF 1-10V PUSH DALI

04

THD <0,2 | PF >0.9 | McA 3 | 850º | 0,5m | Emergency | CE | IP 40 | 220 VAC | ELEC int.

OPTIONAL

10

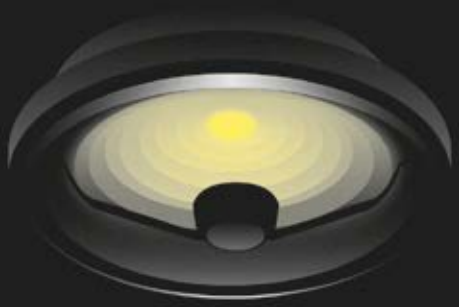

LIGHT SOURCES

Mod 50 9W

LED module consisting of COB, aluminium body with passive dissipation and high efficiency and low luminance specular reflector. Supplied with Driver to ensure proper operation.

	LM018	LM019	LM020	LM021	LM022	LM023	LM024	LM025	LM026
	9W	9W	9W	9W	9W	9W	9W	9W	9W
	20°	38°	55°	20°	38°	55°	20°	38°	55°
	2700K	2700K	2700K	3000K	3000K	3000K	4000K	4000K	4000K
	683lm	683lm	683lm	779lm	779lm	779lm	870lm	870lm	870lm
	76lm/W	76lm/W	76lm/W	86lm/W	86lm/W	86lm/W	97lm/W	97lm/W	97lm/W
CRI	90	90	90	90	90	90	90	90	90

L70 >50.000h



3000K 20°



3000K 38°



3000K 55°



**Available CRI 95*

ON/OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

02

McA 3 · 0,5m · 850° · CE · IP 20 · 220 VAC · ELEC incl.

CHOCOLAT
BUCHARD

Mod 50 12W

LED module consisting of COB, aluminium body with passive dissipation and high efficiency and low luminance specular reflector. Supplied with Driver to ensure proper operation.

	LM050/ 27/20	LM050/ 27/40	LM050/ 27/60	LM050/ 30/20	LM050/ 30/40	LM050/ 30/60	LM050/ 40/60	LM050/ 40/60	LM050/ 40/60	LM050/ 50/20	LM050/ 50/40	LM050/ 50/60
	12W	12W	12W	12W	12W	12W	12W	12W	12W	12W	12W	12W
	25	43°	60°	25°	43°	60°	25°	43°	60°	25°	43°	60°
	2700K	2700K	2700K	3000K	3000K	3000K	4000K	4000K	4000K	5000K	5000K	5000K
	1134lm	1134lm	1134lm	1217lm	1217lm	1217lm	1312lm	1312lm	1312lm	1318lm	1318lm	1318lm
	94lm/W	94lm/W	94lm/W	101lm/W	101lm/W	101lm/W	109lm/W	109lm/W	109lm/W	109lm/W	109lm/W	109lm/W
CRI	90	90	90	90	90	90	90	90	90	90	90	90

L70 >50.000h









Available CRI 95

ON/OFF | PHASE-CUT IGBT/TRIAC | 1-10V | PUSH | DALI

02

McA 3 | 0,5m | 850° | CE | IP 20 | 220 VAC | ELEC incl.

Panda

LED lamp AR-111 with passive heatsink in aluminium and high glare control. Supplied with Driver to ensure proper operation.

	LM032			LM034		
	15,5W	15,5W	15,5W	12,5W	12,5W	12,5W
	8°	20°	45°	8°	20°	45°
	2700K	2700K	2700K	2800K	2800K	2800K
	730lm	730lm	730lm	550lm	550lm	550lm
	56lm/W	56lm/W	56lm/W	50lm/W	50lm/W	50lm/W
CRI	>85	>85	>85	>85	>85	>85
DIMMING	X	X	X	✓	✓	✓
ELEC	12VAC	12VAC	12VAC	36VDC 350mA	36VDC 350mA	36VDC 350mA
	L70 >50.000h					



2800K 8°



2800K 20°



2800K 45°



ON/OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

McA 3 · 0,5m · 850° · CE · IP 20 · 220 VAC · ELEC incl.

02

Remi

LED lamp AR-111 with passive heatsink in aluminium and high glare control. Dimming with TRIAC. Supplied with Driver to ensure proper operation.

LM060

18W

12°-24°-40°

2700K
3000K
4000K
5000K

1610lm
1700lm
1810lm
1820lm

89lm/W
94lm/W
100lm/W
101lm/W

CRI 82

L70>50.000h

H(m)	D(cm)	Lux
1m	32	5056
2m	65	1264
3m	97	562

2700K 24°

H(m)	D(cm)	Lux
1m	75	2574
2m	150	644
3m	224	286

2700K 40°

02

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)





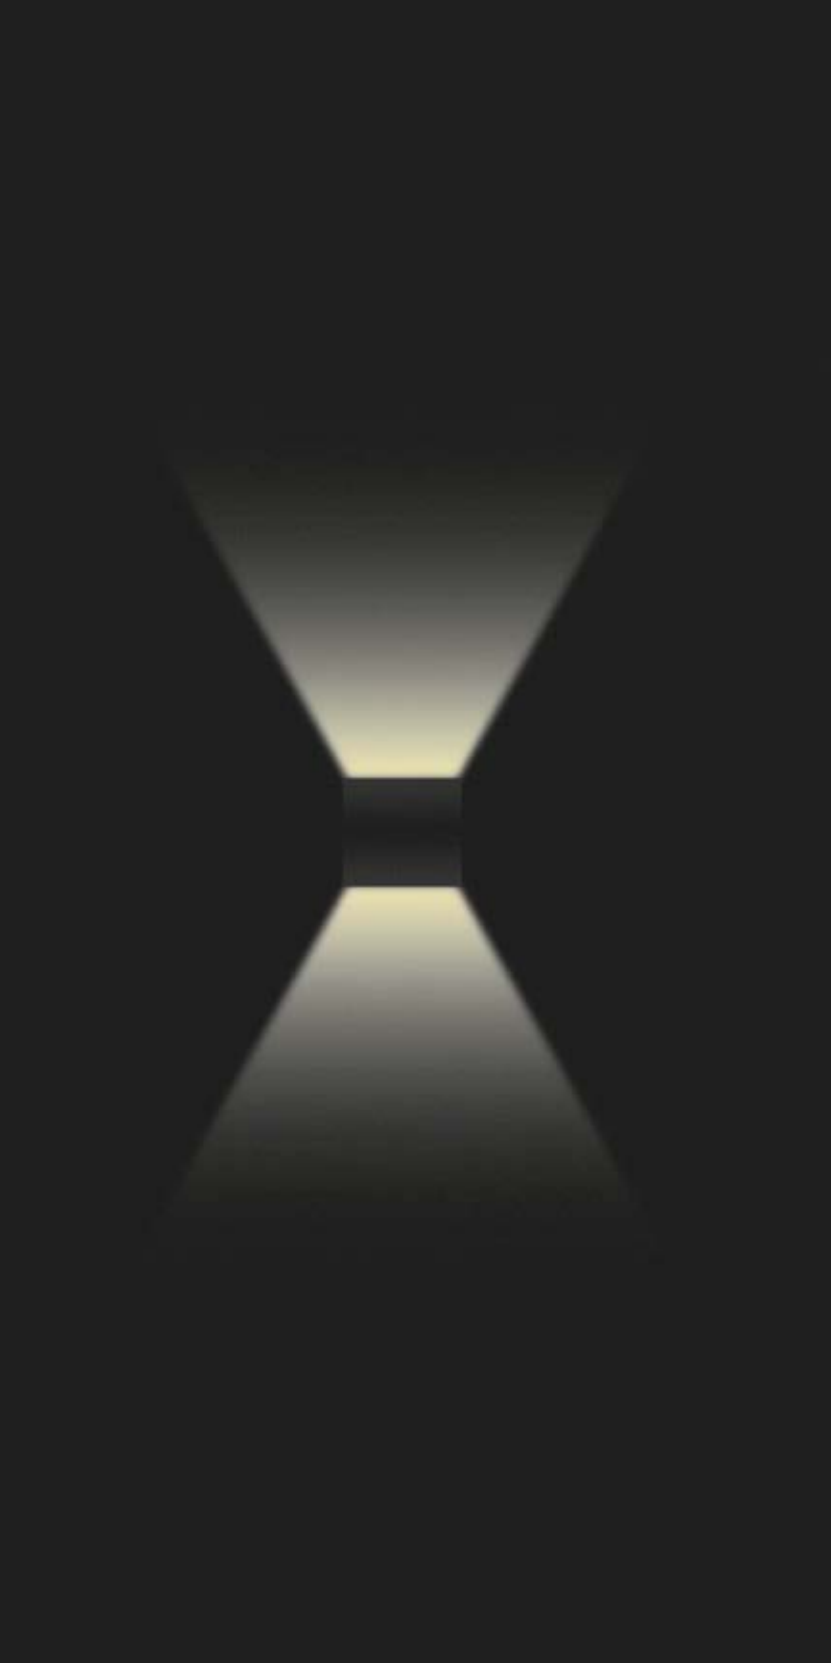

OUTDOOR

Degree

LED surface wall or floor light for outdoor use. Body buid in extruded aluminium with transparent diffuser.

	EX038	EX039	EX040	EX041	EX042
	10W	10W	10W	10W	10W
	1°	1°	1°	1°	1°
	1700K	2000K	2700K	4000K	5500K
	-	-	-	-	-
	-	-	-	-	-
CRI	>85	>85	>85	>85	>85
	L70 >50.000h				

Available: 1° to 30° on request

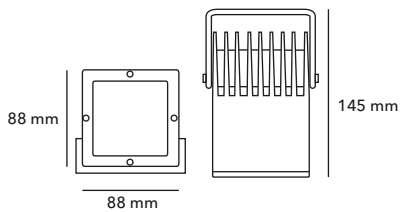



04

Dica

Decorative LED recessed wall/floor light with round opal glass diffuser for outdoor use.

EX002

1W

120º

3000K
6000K
BZ AZUL

50lm
60lm
Azul

50lm/W
60lm/W
Azul

CRI >85

L70 >50.000h

ACCESSORIES

Driver IP67 individual / Consult for serial connection
Waterproof connection box





ON /OFF

OPAL DIFF

0,5m | CE | III | IP 67 | 37 mm | 3V 350mA | ELEC not ind.

Dicac

Decorativa LED recessed wall/floor light with square opal glass diffuser for outdoor use.

EX003

1W

120º

3000K
6000K
BZ AZUL

50lm
60lm
Azul

50lm/W
60lm/W
Azul

CRI >85

L70 >50.000h

ACCESSORIES

Driver IP67 *Driver IP67 individual / Consult for serial connection Waterproof connection box*

**Preinstalation box included*





ON /OFF

OPAL DIFF

0,5m | CE | III | IP 67 | 37 mm | 3V 350mA | ELEC not incl.

Pilo

Decorativa LED recessed wall/floor light for outdoor use. External round ring in stainless steel AISI 316 with central round opal diffuser.

EX004

1W

120º

3000K
6000K
BZ AZUL

50lm
60lm
Azul

50lm/W
60lm/W
Azul

CRI >85

L70 >50.000h

ACCESSORIES

Driver IP67 *Driver IP67 individual / Consult for serial connection Waterproof connection box*

**Preinstalation box included*





Pilor

Decorativa LED recessed wall/floor light for outdoor use. External round ring in stainless steel AISI 316 with central round opal diffuser.

EX005

1W

120º

3000K
6000K
BZ AZUL

50lm
60lm
Azul

50lm/W
60lm/W
Azul

CRI >85

L70 >50.000h

ACCESSORIES

Driver IP67 *Driver IP67 individual / Consult for serial connection Waterproof connection box*

**Preinstalation box included*





ON /OFF

02

OPAL DIFF

0,5m

IP 67

37 mm

350mA

3V

ELEC not incl.

Luna 4W

LED recessed passable light for outdoor use. Body and cable glands in die-cast aluminium, housing in stainless steel AISI 316. PMMA flush mounted box included.

EX006

4W

10°-25°-40°

3000K
4000K

260lm

65lm/W

CRI >85

L70 >50.000h



H(m)	D(cm)	Lux
1m	18	2859
2m	36	715
3m	55	318

3000K 10°

H(m)	D(cm)	Lux
1m	42	957
2m	84	239
3m	125	106

3000K 25°

H(m)	D(cm)	Lux
1m	77	389
2m	154	97
3m	232	43

3000K 40°

02

Luna 7W

LED recessed passable light for outdoor use. Body and cable glands in die-cast aluminium, housing in stainless steel AISI 316. PMMA flush mounted box included.

EX007

7W

16°-28°-40°

3000K
4000K

540lm

77lm/W

CRI >85

L70 >50.000h

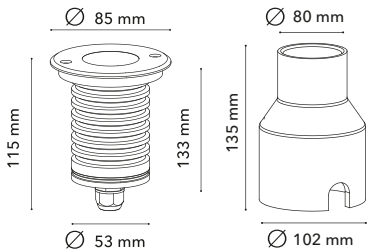

H(m)	D(cm)	Lux
1m	30	2224
2m	59	556
3m	89	247

3000K 16°

H(m)	D(cm)	Lux
1m	50	2106
2m	100	527
3m	150	234

3000K 28°

H(m)	D(cm)	Lux
1m	77	808
2m	154	202
3m	232	90

3000K 40°

ON /OFF

02

0,5m | CE | IP 67 | 24 VDC | 78mm | 1000Kg | ELEC not ind.

Lit R / C

Asymmetrical recessed decorativa wall LED light with aluminium body. Mounting box included.

	EX026	EX027	EX028	EX029
	4W	4W	4W	4W
	-	-	-	-
	3000K	3000K	3000K	3000K
	30lm	30lm	30lm	30lm
	8W	8W	8W	8W
CRI	>80	>80	>80	>80
	L70 >50.000h			

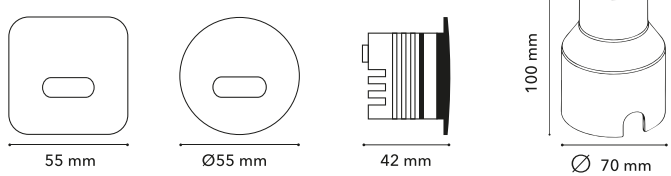

Seleccionar apertura *Select opening:*

01 14 04 Otros acabados consultar *Other finishings consult*

Kent

Outdoor recessed LED light with asymetrical light distribution and body in aluminium injection. Opal glass diffuser and PMMA flushed mounting box included.

EX009

3W

-

3000K

186lm

62lm/W

CRI >85

L70 >50.000h

ACCESSORIES

Honeycomb

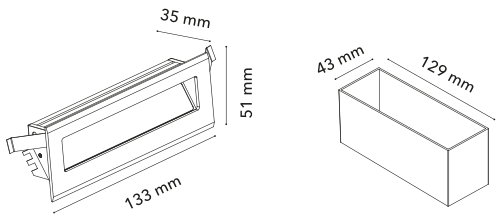

ON /OFF

01 06 04

0,5m | CE | IP 54 | 220 VAC | ELEC int.

Dua

Surface watertight LED wall light. Body in die-cast aluminium with direct and indirect luminous flux emission.

EX01083001

2x6W

-

3000K

2x360lm

60lm/W

CRI 80

L70 >50.000h

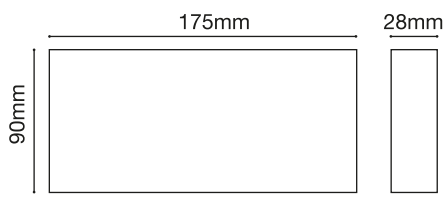

ON /OFF

01

0,5m

IP 54

220 VAC

ELEC int.

Kub

Surface watertight LED wall light. Body in die-cast aluminium with direct and indirect luminous flux emission.

EX043

2x3,4W

0º to 120º

3000K

hasta 2x270lm

hasta 79lm/W

CRI 80

L70 >50.000h

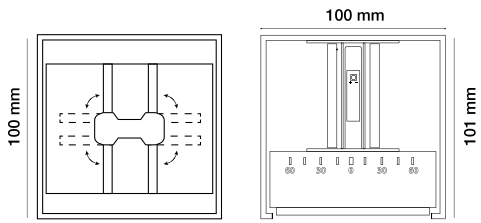

ON /OFF

01 04

0,5m IP 65 220 VAC ELEC int.

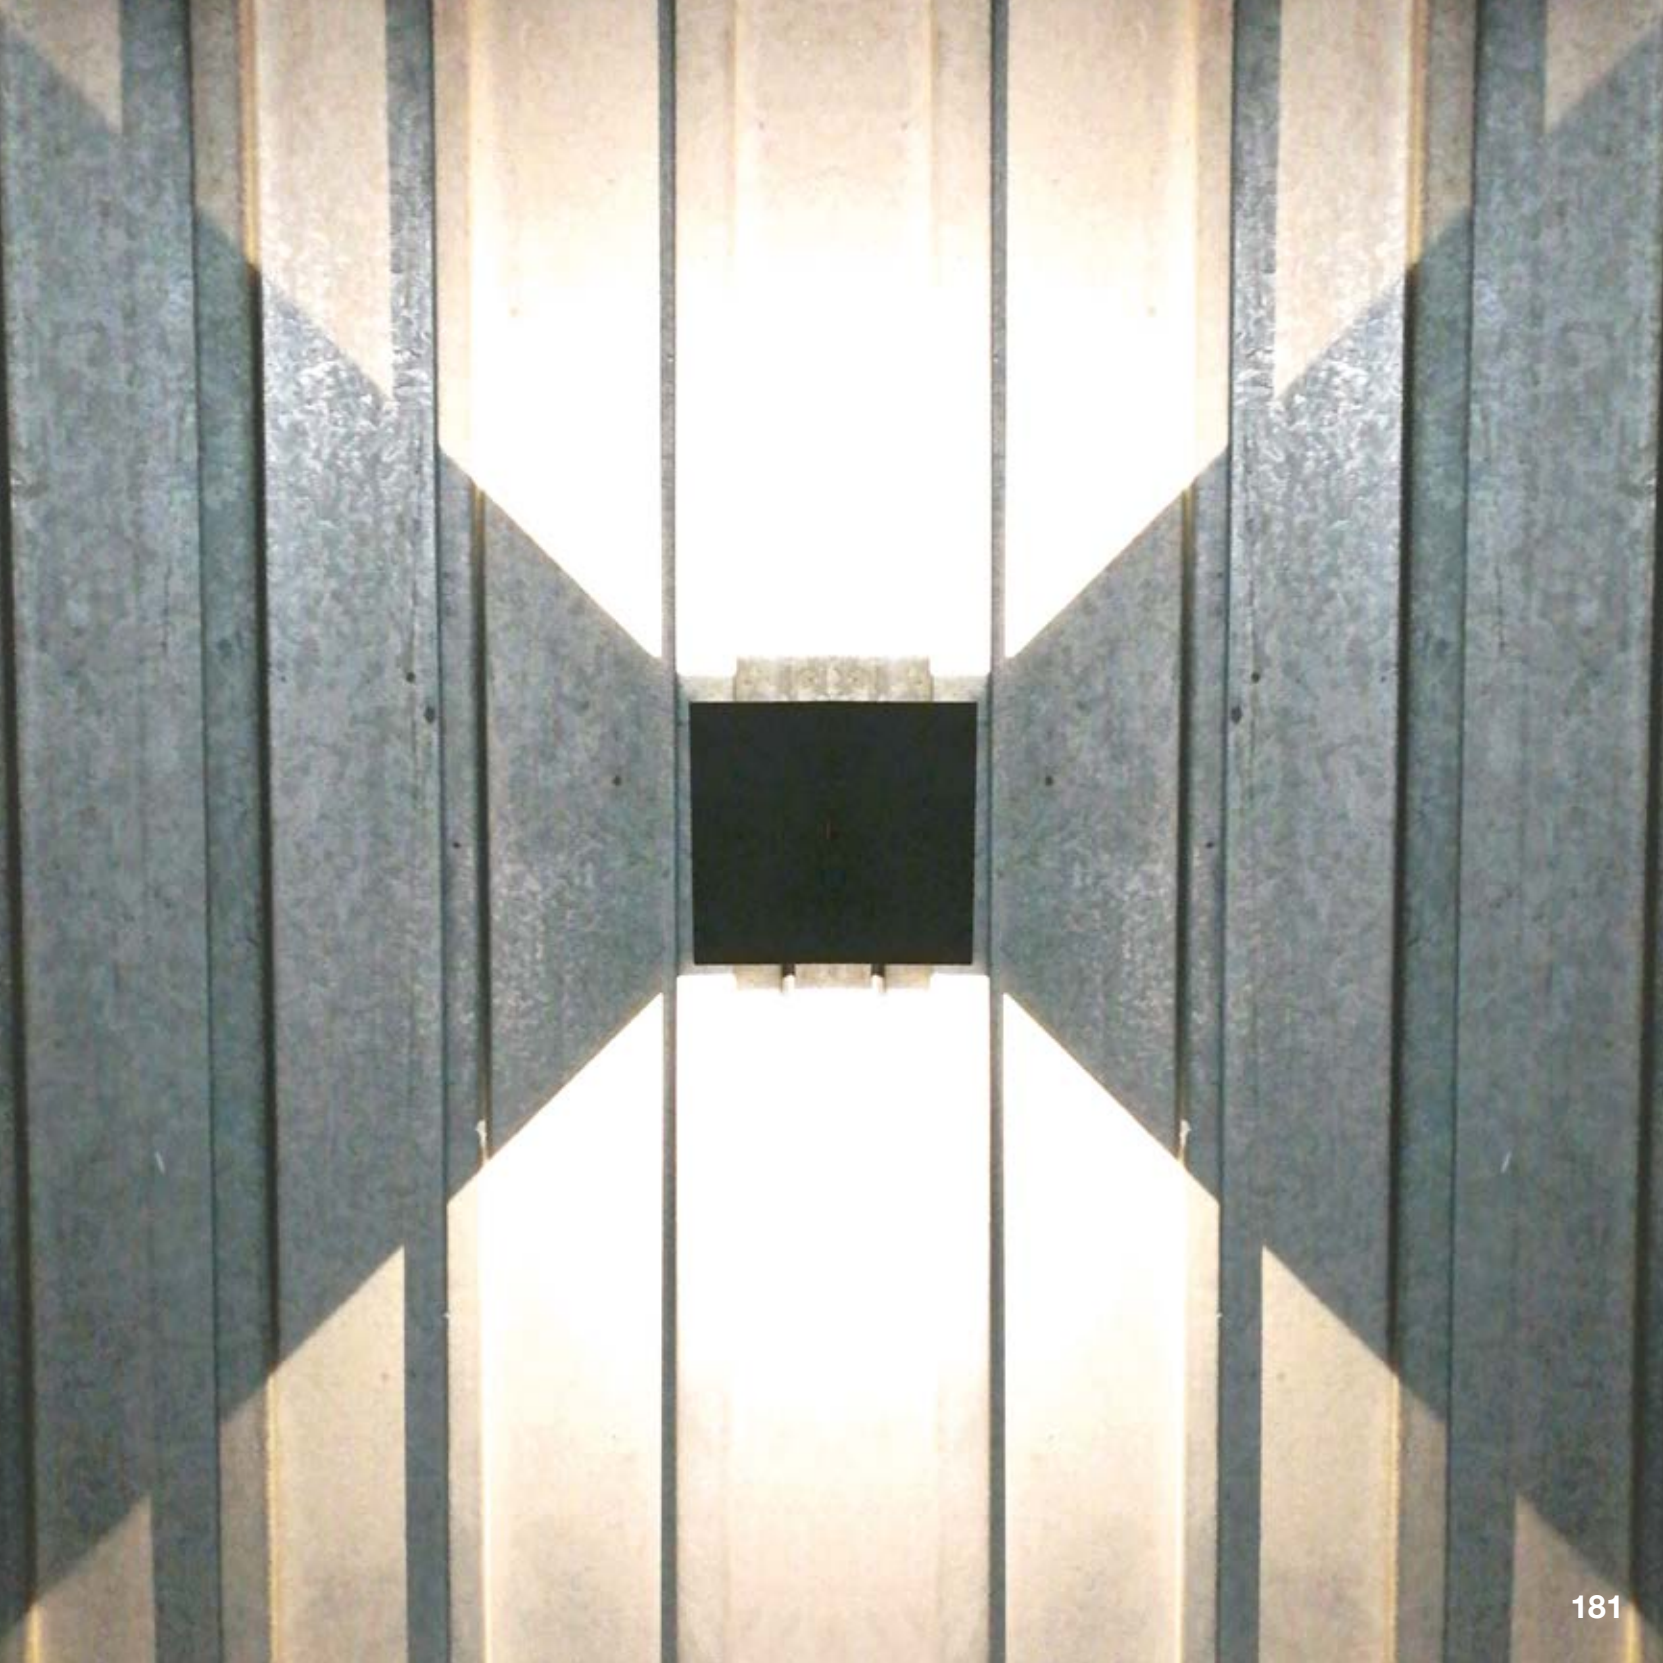

Rub

Surface watertight LED wall light. Body in die-cast aluminium with direct and indirect luminous flux emission.

EX044

2x3,4W

0º to 120º

3000K

hasta 2x27lm

hasta 79lm/W

CRI 80

L70 >50.000h





ON /OFF

01 04

0,5m IP 65 220 VAC ELEC int.

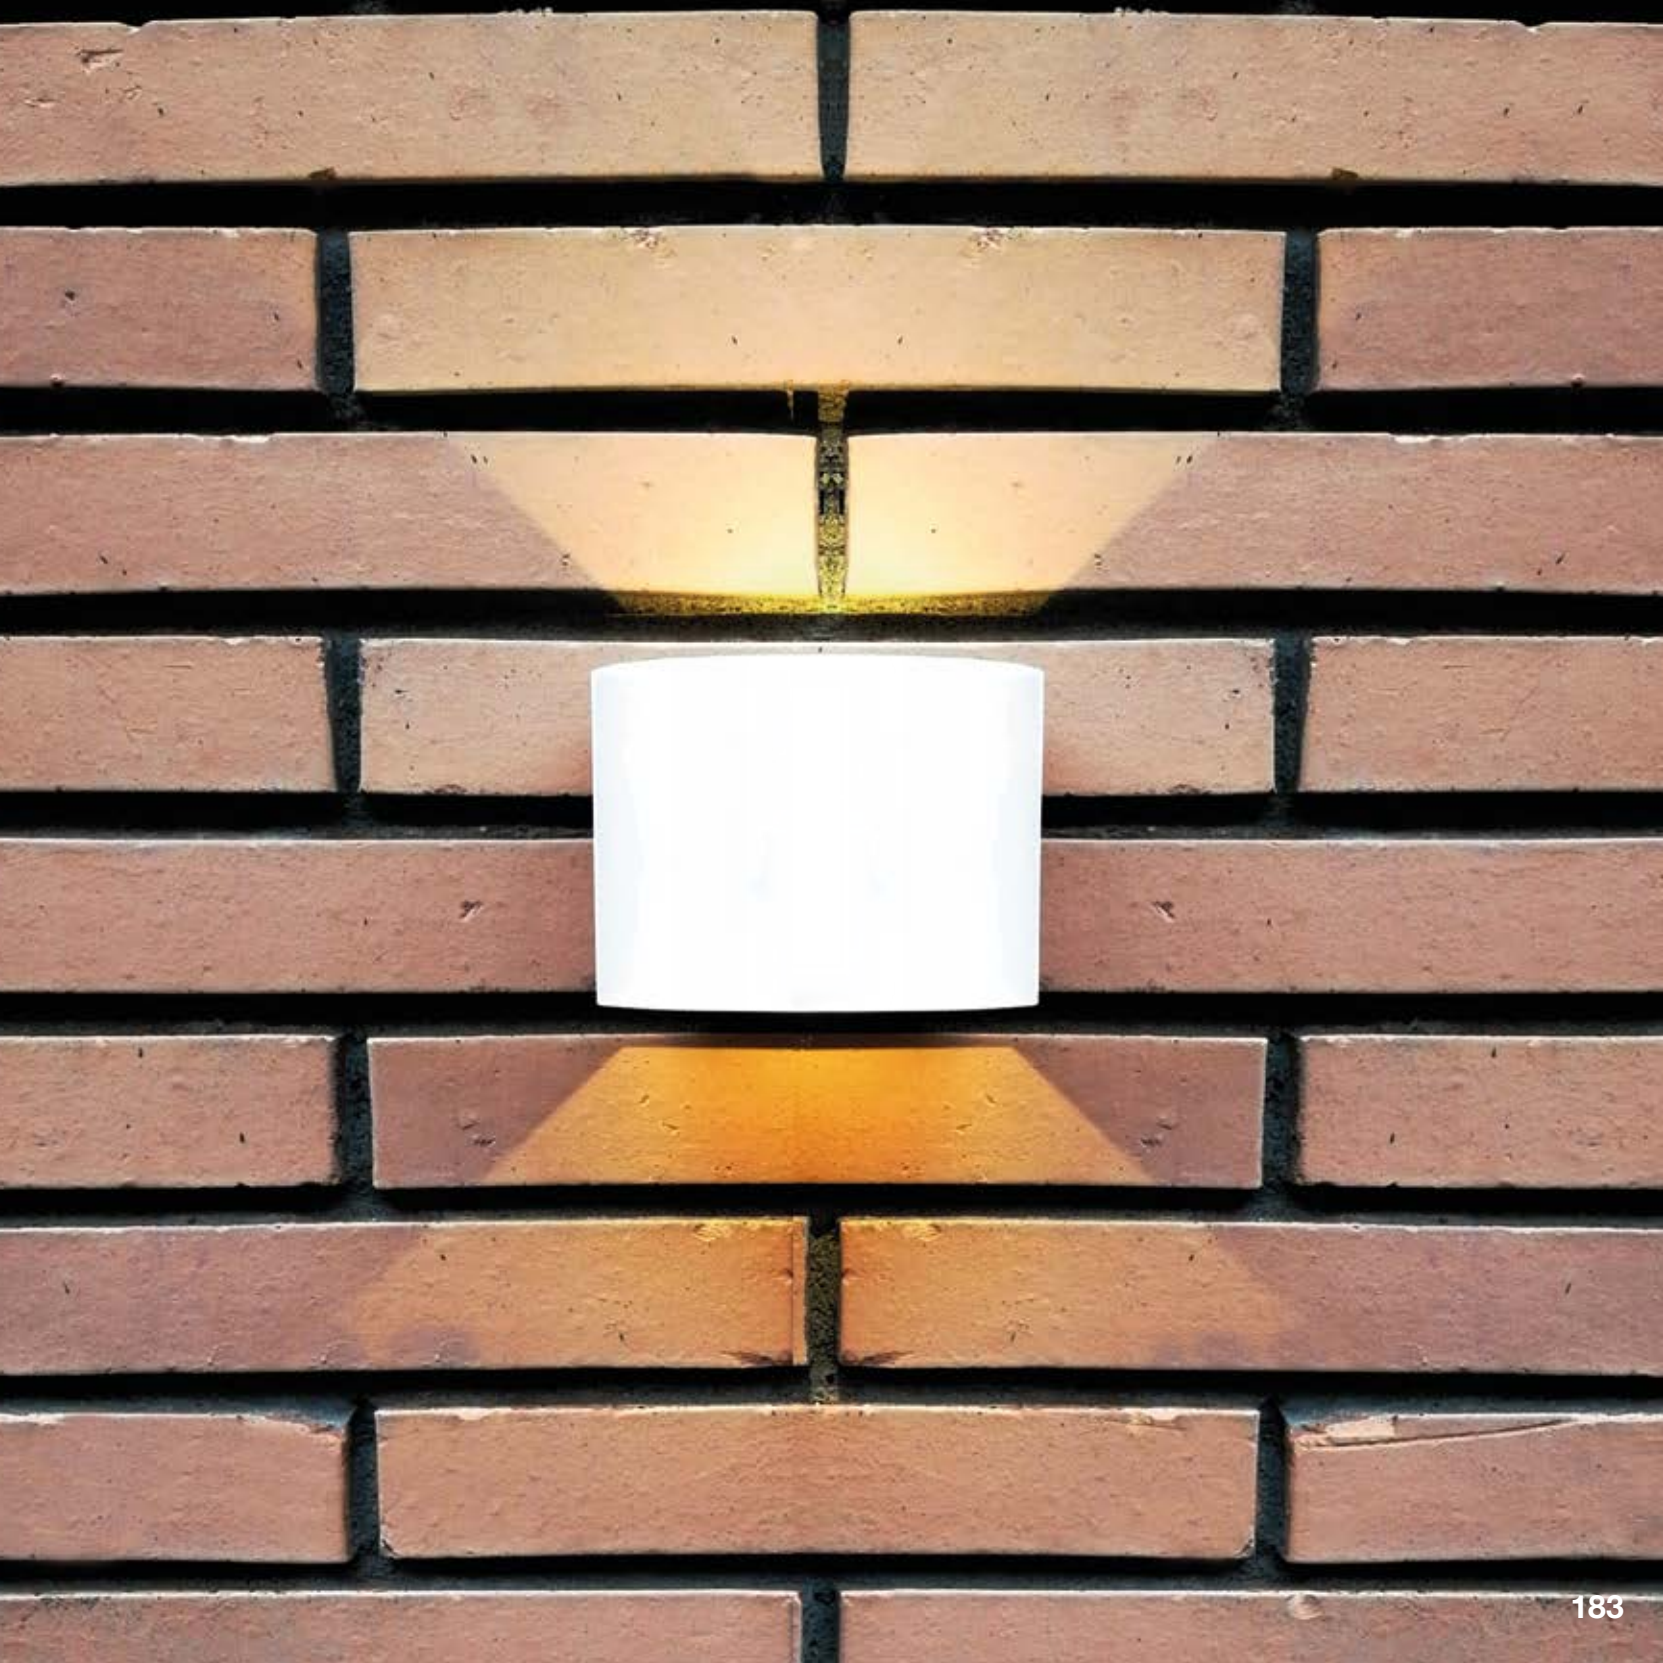

Lu

Outdoor light in small format in die-cast aluminium.
Surface or garden spike mounting.

EX033

5W

38°

3000K

350lm

70lm/W

CRI >80

L70 >50.000h

H(m)	D(cm)	Lux
1m	32	1180
2m	65	285
3m	103	115

3000K 38°

ACCESSORIES

Garden spike





06

LuL

Outdoor light in small format in die-cast aluminium.
Surface or garden spike mounting.

EX035

17W

35°

3000K

1180lm

70lm/W

CRI >80

L70 >50.000h

H(m)	D(cm)	Lux
1m	67	2580
2m	130	1460
3m	210	340

3000K 35°

ACCESSORIES

Garden spike





06

Ta

Outdoor light in die-cast aluminium.
High impact pmma frosted diffuser.

	3200	3201	3202
	7W 15W	5W 10W	3W 5W
	120°	120°	120°
	2200K 2700K 4100K	2200K 2700K 4100K	2200K 2700K 4100K
	220lm/435lm 250lm/495lm 260lm/525lm	145lm/290lm 165lm/330lm 175lm/350lm	75lm/145lm 85lm/165lm 130lm/175lm
	31lm/W-29lm/W 36lm/W-33lm/W 37lm/W-35lm/W	29lm/W-29lm/W 33lm/W-33lm/W 35lm/W-35lm/W	25lm/W-29lm/W 28lm/W-33lm/W 43lm/W-35lm/W
CRI	80	80	80
	L70 >50.000h	L70 >50.000h	L70 >50.000h

3200

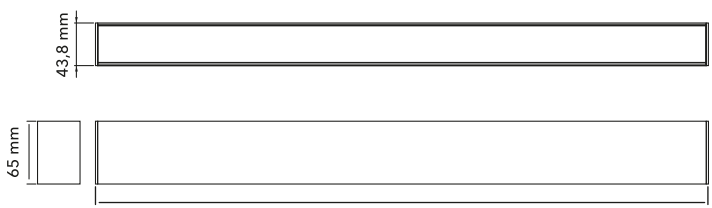

3200	634mm
3201	434mm
3202	234mm

ON /OFF

04 OXY

0,5m CE 220 VAC 650° IP 67 ELEC int.

Wallwasher

Outdoor LED light wall washer. Body in die-cast aluminium with external driver. Possibility DMX for RGB versions.

	EX021	EX022
	18W	36W
	25°	25°
	3500K 5500K RGB	3500K 5500K RGB
	1440lm 1800lm	2880lm 3240lm
	80lm/W 100lm/W	80lm/W 100lm/W
CRI	>85	>85
	L70 >50.000h	

H(m)	D(cm)	Lux
1m	29	9875
2m	58	2469
3m	86	1097

3500K 25°

H(m)	D(cm)	Lux
1m	29	19750
2m	58	4938
3m	86	2194

3500K 25°

ACCESSORIES

Power supply 60W 24V IP67

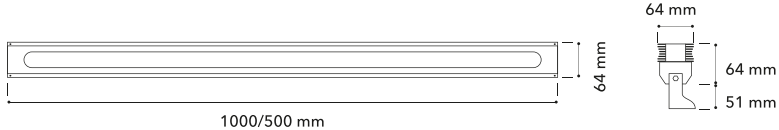





04

electric drive
BB XY 220E

Su

Surface watertight LED cel light. Body in die-cast aluminium with direct luminous flux emission.

SP20083001

13,6W

160°

3000K

690lm

51lm/W

CRI 80

L70 >50.000h



ON /OFF

01

0,5m | CE | IP 54 | 220 VAC | ELEC int.

Erde UD

Surface watertight LED wall light. Body in die-cast aluminium with direct and indirect luminous flux emission.

EX036

2x7W

15ºW

3000K

2x600lm

86lm/W

CRI 80

L70 >50.000h

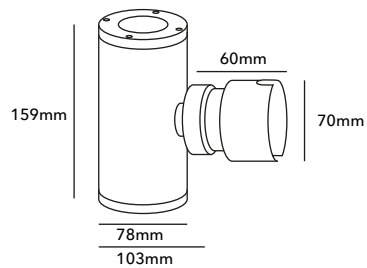

04

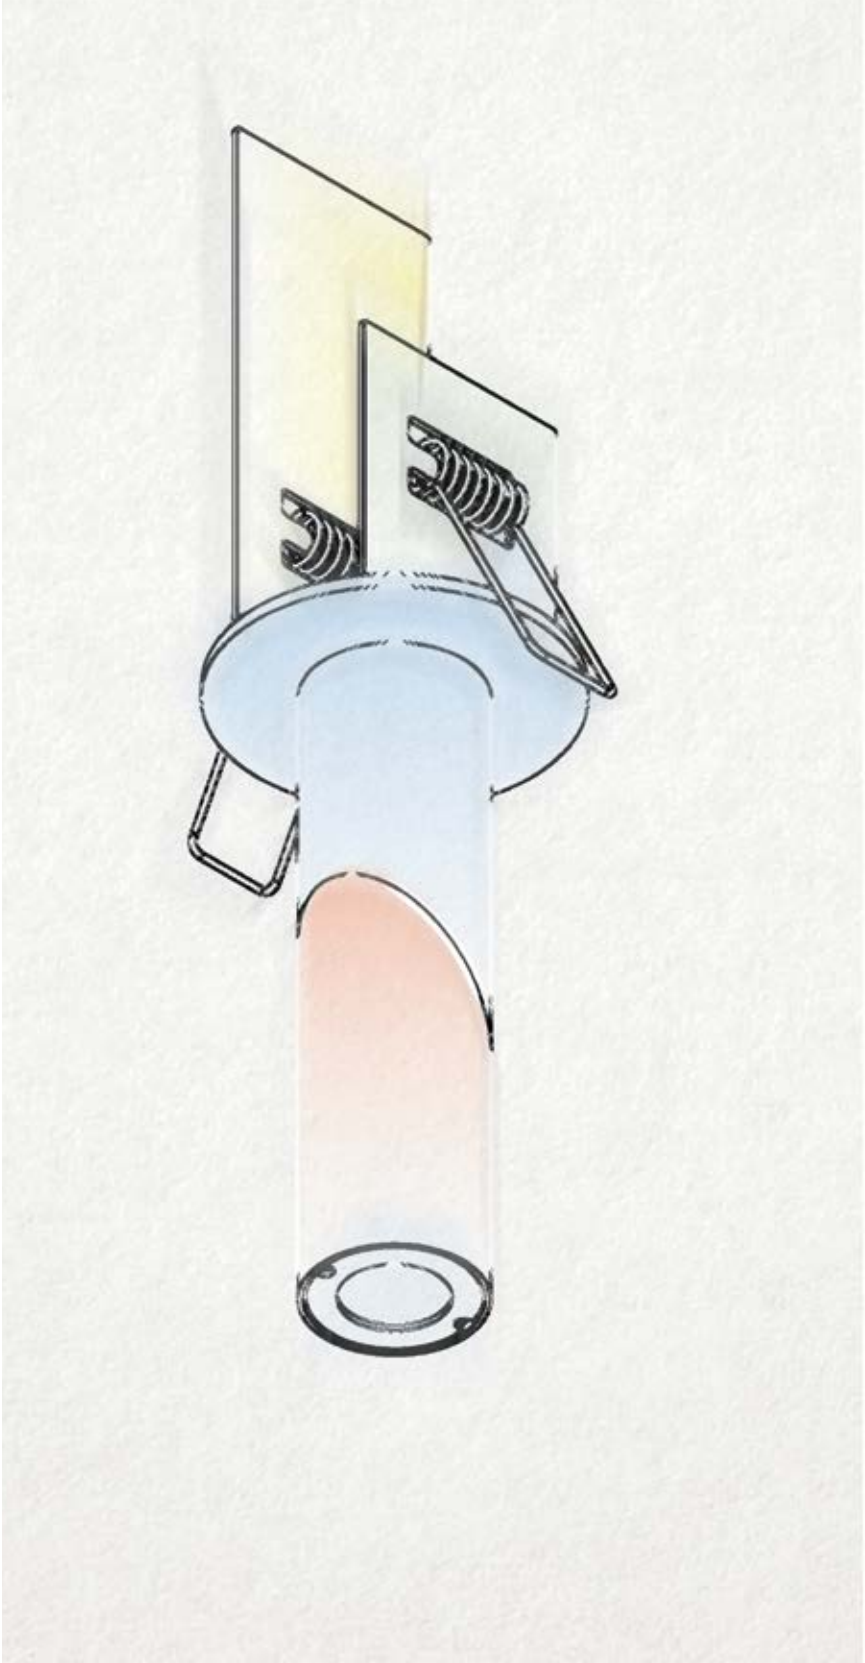

DESIGN

The Design section is the result of Spanish and international designers' creativity. It offers high quality finishes and exclusive designs thought for applications where aesthetics play a great role and where an image of higher quality is pursued.

Aur+ S

Surface indoor lighting fixture IP20. Cast aluminium manufactured. Available with arms of different lengths. Driver included.

2043

6W

20°-40°-60°

2700K
3000K
4000K

500lm
550lm
600lm

83lm/W
92lm/W
100lm/W

CRI >90

L70 >50.000h





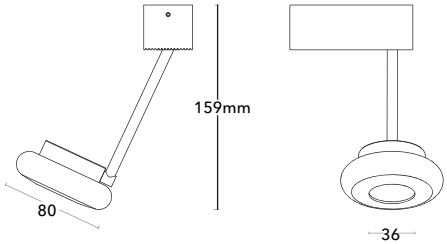

ON /OFF

L,C PHASE-CUT IGBT/TRIAC

Top box

01 04

01 RAL 9003
04 RAL 9005

Body heat sink

Ocean Cherry Forest
Silver Black Old Gold

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Aur+ E

Semirecessed indoor lighting fixture IP20. Cast aluminium manufactured. Avalible with arms of different lengths. Driver included.

2083

6W

20°-40°-60°

2700K
3000K
4000K

500lm
550lm
600lm

83lm/W
92lm/W
100lm/W

CRI >90

L70 >50.000h



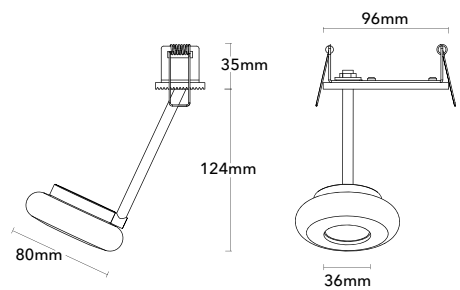

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

Top box

01 04

01 RAL 9003
04 RAL 9005

Body heat sink

Ocean · Cherry · Forest
Silver · Black · Old Gold

CE · IP 20 · 220 VAC · ELEC incl. · McA 3 · 0,5m · 850° · 91x32mm

Aur+ B

Semirecessed indoor luminaire in aluminium.
Driver included.

2044

6W

20°-40°-60°

2700K
3000K
4000K

500lm
550lm
600lm

83lm/W
92lm/W
100lm/W

CRI >90

L70 >50.000h



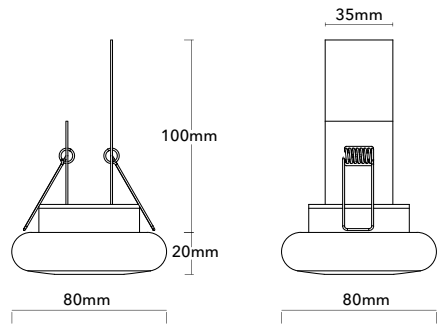

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

Ocean · Cherry · Forest
Silver · Black · Old Gold

CE · IP 20 · 220 VAC · ELEC incl. · McA 3 · 0,5m · 850° · 46mm

Aur+ C

Swivel indoor liminaire in aluminium. Mounted with TAR48 magnetic track. recessed adapter and powered at 48VDC. Avalible in different arm lenghts. DALI dimming option avalible.

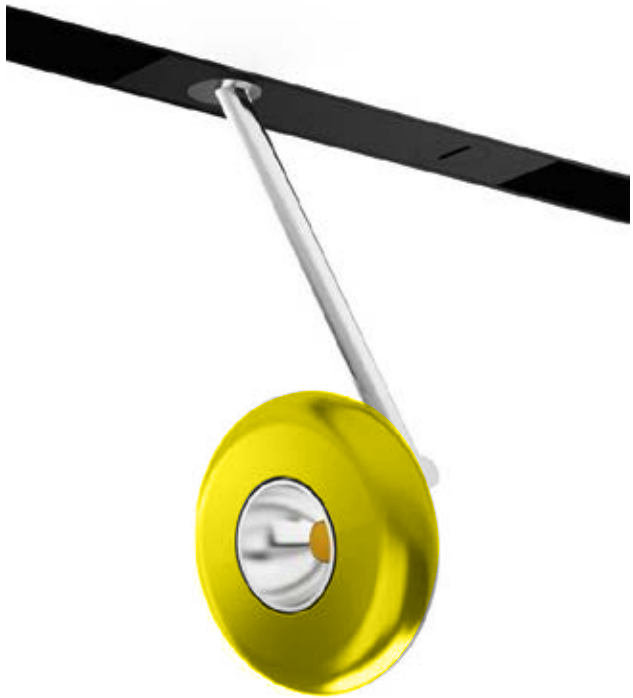

6011

6W

20°-40°-60°

2700K
3000K
4000K

500lm
550lm
600lm

83lm/W
92lm/W
100lm/W

CRI >90

L70 >50.000h



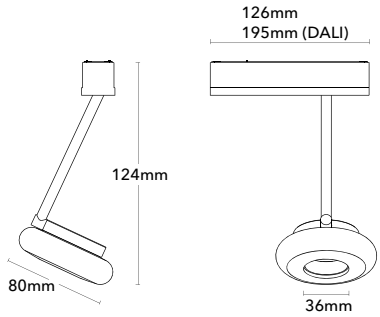

ON /OFF PUSH DALI

Top box

01 04

01 RAL 9003
04 RAL 9005

Body heat sink

Ocean Cherry Forest
Silver Black Old Gold

MAGNETIC CE IP 20 48 VDC ELEC incl. McA 3 0,5m 850°

Er + S

Indoor swivel luminaire with in aluminium. Avalible in different arm lengths. Driver and trim included.

2042

13W

60°

2700K
3000K
4000K

1000lm
1150lm
1250lm

77lm/W
88lm/W
96lm/W

CRI >90

L70 >50.000h



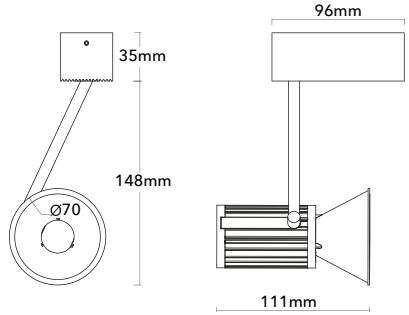

ON /OFF

L,C PHASE-CUT IGBT/TRIAC

Top box

01 04

01 RAL 9003
04 RAL 9005

Body heat sink

Ocean Cherry Forest
Silver Black Old Gold

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Er + E

Semirecessed swivel indoor liminaire in aluminium.
Avalible in different arm lenghts. Driver included.

2082

13W

60°

2700K
3000K
4000K

1000lm
1150lm
1250lm

77lm/W
88lm/W
96lm/W

CRI >90

L70 >50.000h



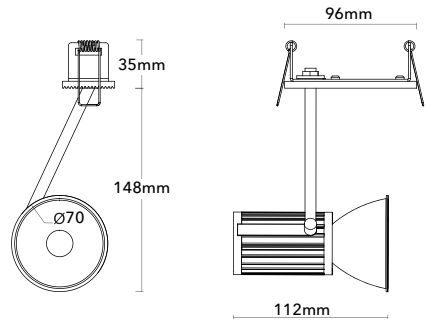

ON /OFF | PHASE-CUT IGBT/TRIAC | 1-10V | PUSH | DALI

Top box

01 04

01 RAL 9003
04 RAL 9005

Body heat sink

Ocean | Cherry | Forest
Silver | Black | Old Gold

IP 20 | 220 VAC | ELEC incl. | McA 3 | 0,5m | 850°

91x32mm

Er + C

Semirecessed swivel luminaire in aluminium. It is mounted with TAR48 magnetic track recessed adapter and powered at 48VDC. Available in different arm lenghts. Dali dim option avalible.

6008

13W

60°

2700K
3000K
4000K

1000lm
1150lm
1250lm

77lm/W
88lm/W
96lm/W

CRI >90

L70 >50.000h



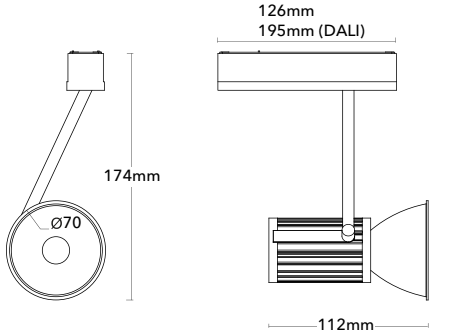



Top box

01 RAL 9003
04 RAL 9005

Body heat sink

Ocean
Silver
Cherry
Black
Forest
Old Gold

Ar + S

Adjustable indoor luminaire in aluminium. Includes protective glass specular reflector or hight-performance optical lens. Driver included.

2041

12W
26W

10°-20°-40°-60°

2700K
3000K
4000K

1000lm/1800lm
1200lm/2050lm
1300lm/2200lm

88lm/W-69lm/W
100lm/W-79lm/W
108lm/W-85lm/W

CRI >90

L70 >50.000h



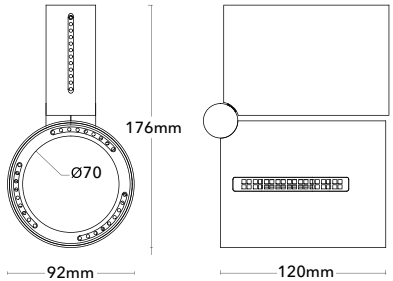





01 04

01 RAL 9003
04 RAL 9005

Ar + C

Adjustable indoor lluminaire in aluminium. Mounted with TAR48 magnetic track recessed adapter and powered at 48VDC. Dali dim option avalible.

6003

12W
26W

10º-20º-40º-60º

2700K
3000K
4000K

1000lm/1800lm
1200lm/2050lm
1300lm/2200lm

88lm/W-69lm/W
100lm/W-79lm/W
108lm/W-85lm/W

CRI >90

L70 >50.000h



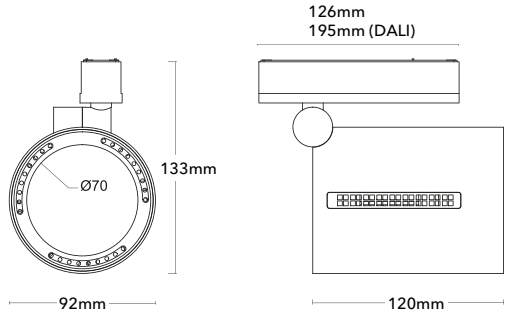

ON /OFF PUSH DALI

01 04 01 RAL 9003
04 RAL 9005

MAGNETIC CE IP 20 48 VDC ELEC incl. McA 3 0,5m 850º

Arc + S

Adjustable indoor luminaire in aluminium. Built-in driver. Includes protective glass and specular reflector or hight-performance optical lens.

2045

12W
26W

10°-20°-40°-60°

2700K
3000K
4000K

1000lm/1800lm
1200lm/2050lm
1300lm/2200lm

88lm/W-69lm/W
100lm/W-79lm/W
108lm/W-85lm/W

CRI >90

L70 >50.000h









ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

CE · IP 20 · 220 VAC · ELEC incl. · McA 3 · 0,5m · 850°

01 04 01 RAL 9003
04 RAL 9005

Arc + C

Adjustable indoor luminarie in aluminium. Mounted with TAR48 magnetic track recessed adapter and powered at 48VDC. Dali dim option avalible.

2045

12W
26W

10°-20°-40°-60°

2700K
3000K
4000K

1000lm/1800lm
1200lm/2050lm
1300lm/2200lm

88lm/W-69lm/W
100lm/W-79lm/W
108lm/W-85lm/W

CRI >90

L70 >50.000h



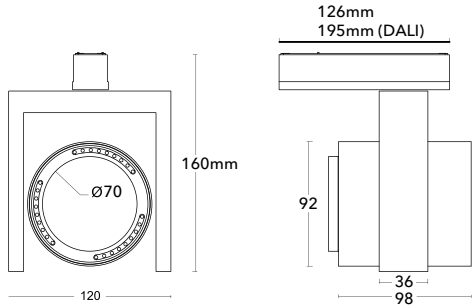



01 04 01 RAL 9003
04 RAL 9005

Po + 25E

Adjustable luminaire in aluminium equipped with high performance and precision optical lens. Infinite system incorporated. Driver included.

2080

4W

15° 40°

2700K
3000K
4000K On request
Bajo pedido

350lm
350lm
350lm

88lm/W
88lm/W
88lm/W

CRI >90

L90 >50.000h







01 04 01 RAL 9003
04 RAL 9005

Po + 25C

Adjustable indoor luminarie in aluminium. Mounted with TAR48 magnetic track recessed adapter and powered at 48VDC. Infinite rotation system incorporated. DALI dimming option avalible.

	6010
	4W
	14º-39º
	2700K 3000K 4000K On request Bajo pedido
	350lm 350lm 350lm
	88lm/W 88lm/W 88lm/W
CRI	>90
	L90 >50.000h



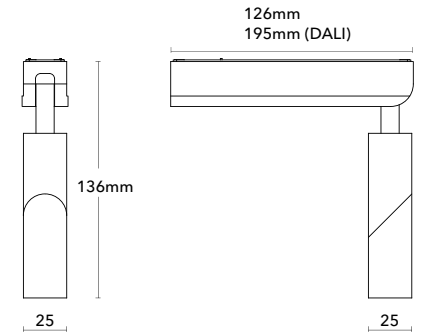



01 04 01 RAL 9003
04 RAL 9005

Po + 55S

Surface adjustable luminarie in aluminium, including protection glass. Infinite rotation system incorporated. Driver included.



2056

9W

20°-40°-60°

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h



ON /OFF

PHASE-CUT IGBT/TRIAC

01 04

01 RAL 9003
04 RAL 9005

IP 20 | 220 VAC | ELEC incl. | McA 3 | 0,5m | 850°

Po + 55E

Recessed adjustable luminarie in aluminium, including protection glass. Infinite rotation system incorporated Driver included.

2048

9W

20°-40°-60°

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h









01 04

01 RAL 9003
04 RAL 9005

Po + 55A

Surface adjustable indoor wall luminarie in aluminium, equipped with high performance specular reflector and glass protector. Infinite rotation system incorporated. Driver included.

1014

9W

20°-40°-60°

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h







ON /OFF

L,C
PHASE-CUT
IGBT/TRIAC

01 04

01 RAL 9003
04 RAL 9005

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Po + 55C

Adjustable indoor luminarie in aluminium. Mounted with TAR48 magnetic track recessed adapter and powered at 48VDC. Infinite rotation system.
Dali dim option avalible.

6009

9W

20°-40°-60°

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h







01 04 01 RAL 9003
04 RAL 9005

Min + 500A

Semirecessed indoor wall luminarie in steel. Driver included.

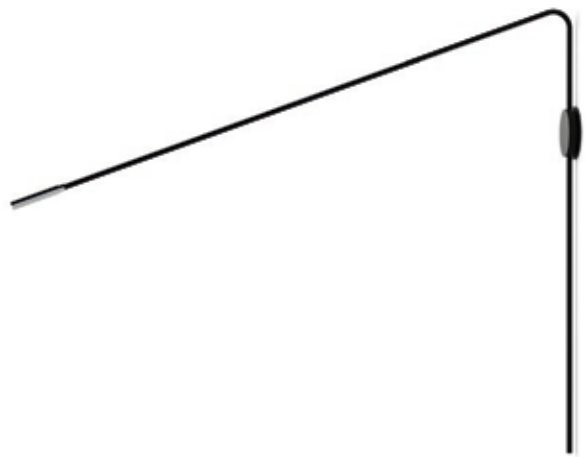

1009

1W

80°

3000K

90lm

90lm/W

CRI >90

L70 >50.000h



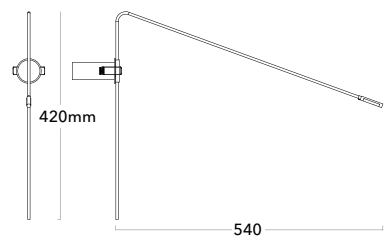

ON /OFF

01 04 01 RAL 9003
04 RAL 9005

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 46mm 850°

Min + 1000A

Semirecessed indoor wall luminarie in steel. Driver included.

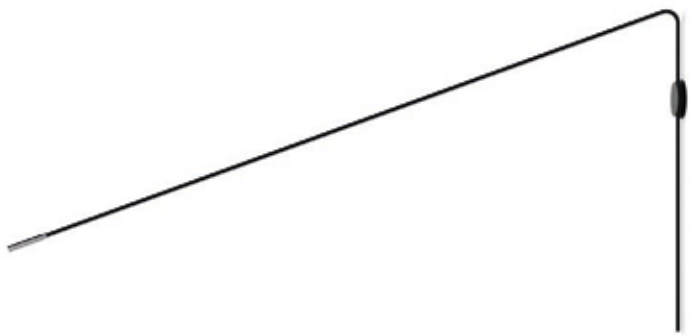

1011

1W

80°

3000K

90lm

90lm/W

CRI >90

L70 >50.000h



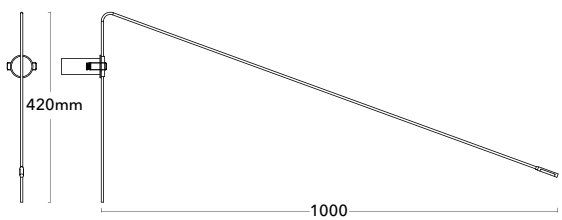

ON /OFF

01 04 01 RAL 9003
04 RAL 9005

CE | IP 20 | 220 VAC | ELEC incl. | McA 3 | 0,5m | 46mm | 850°

Min + 1000P2

Indoor luminarie in steel. Driver included.

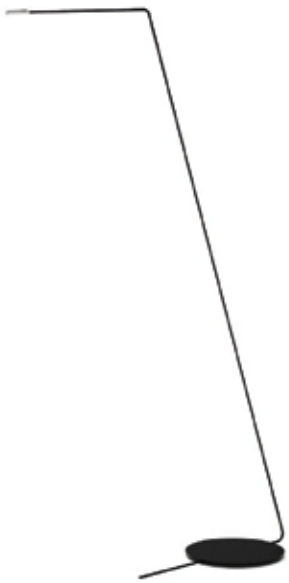

4005

2W

80°

3000K

160lm

80lm/W

CRI >90

L70 >50.000h





01 04 01 RAL 9003
04 RAL 9005

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Min + 900M2

Indoor luminarie in steel. Driver included.

3004

2W

80°

3000K

160lm

80lm/W

CRI >90

L70 >50.000h



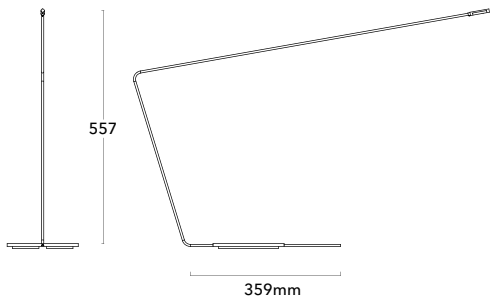

ON /OFF

01 04 01 RAL 9003
04 RAL 9005

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Ray + S

Surface Indoor luminarie in steel with polycarbonate diffuser. Driver included.

2071

8W

120°

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h



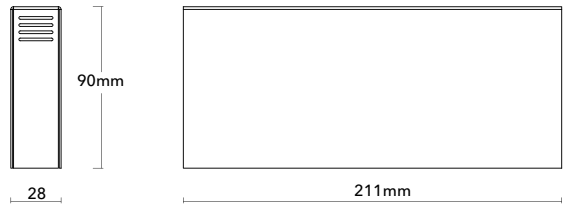

01 04 01 RAL 9003
04 RAL 9005

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Ray + ED

Indoor recessed frameless luminarie made of steel and polycarbonate matt diffuser. Driver included.

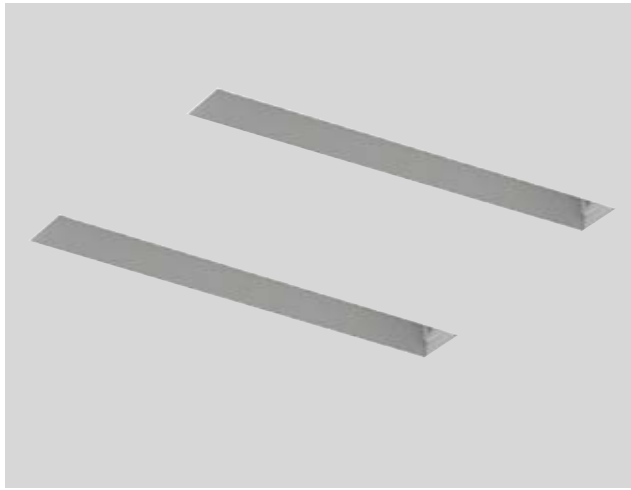

2070

8W

120°

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h







01 04 01 RAL 9003
04 RAL 9005

Ray + SU

Indoor pendant luminarie made of steel and polycarbonate matt diffuser. Driver included. Suspended by 3mm coaxial cable.

2085

8W

120°

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h



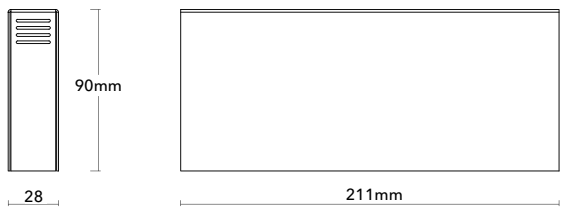

ON /OFF

01 04 01 RAL 9003
04 RAL 9005

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Ray + C

Indoor luminarie of steel and polycarbonate matt diffuser, mounted with TAR48 magnetic track recessed adapter and powered at 48VDC.

6005

8W

120º

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h



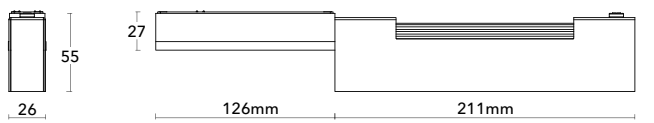

ON /OFF

01 04 01 RAL 9003
04 RAL 9005

MAGNETIC · CE · IP 20 · 48 VDC · ELEC incl. · McA 3 · 0,5m · 850º

Rayt + S

Surface indoor luminarie made of steel with polycarbonate matt diffuser. Driver included.

2032

4W

120°

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h







ON /OFF

01 04 01 RAL 9003
04 RAL 9005

CE IP 20 220 VAC ELEC incl. McA 3 0,5m 850°

Rayt + ED

Indoor recessed frameless luminarie. Made of steel and polycarbonate matt difusser. Driver included.

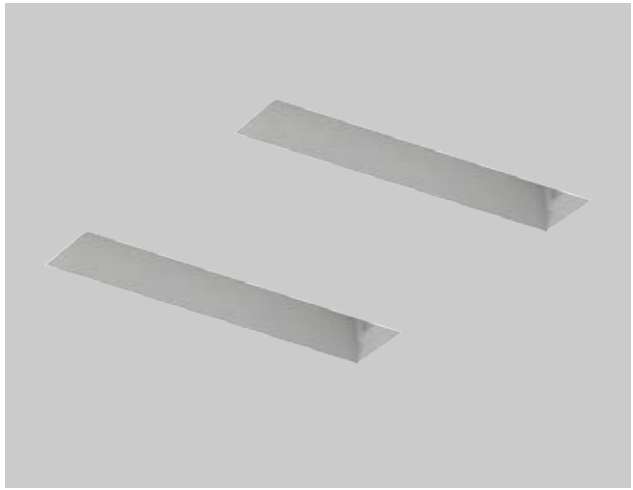

2031

4W

120º

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h



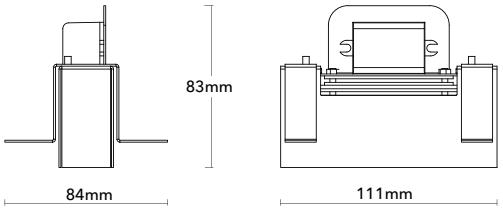





01 04

01 RAL 9003
04 RAL 9005

Rayt + SU

Indoor pendant luminaire made of steel and polycarbonate matt diffuser. Driver included. Suspended by 3mm coaxial cable.

2086

4W

120°

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h









01 04 01 RAL 9003
04 RAL 9005

Rayt + C

Indoor luminarie made of steel with a polycarbonate matt diffuser, mounted with TAR48 magnetic track recessed adapter and powered at 48VDC.

6014

4W

120°

2700K
4100K

580lm
620lm

73lm/W
78lm/W

CRI >90

L70 >50.000h



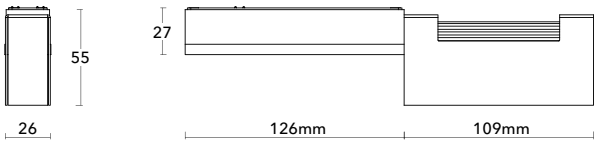

01 04

01 RAL 9003
04 RAL 9005

Bu + S

Surface indoor luminarie with adjustable beam made of steel. Driver included.

2053

13W
25W

17°-24°-40°-60°

2700K
3000K
4000K

900lm/1750lm
1050lm/2050lm
1100lm/2150lm

69lm/W-70lm/W
81lm/W-82lm/W
85lm/W-86lm/W

CRI >90

L70 >50.000h



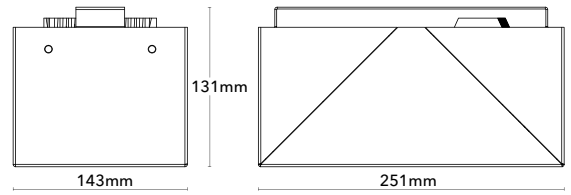



01 04 01 RAL 9003
04 RAL 9005

Bu + duo S

Surface indoor luminarie with adjustable beams made of steel. Driver included.

2054

2x13W
2x25W

17°-24°-40°-60°

2700K
3000K
4000K

2x900lm / 2x1750lm
2x1050lm / 2x2050lm
2x1100lm / 2x2150lm

69lm/W-70lm/W
81lm/W-82lm/W
85lm/W-86lm/W

CRI >90

L70 >50.000h



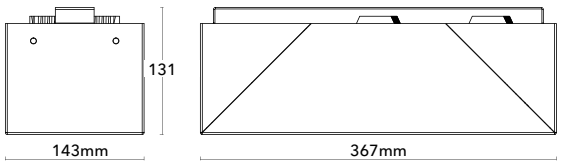





01 04

01 RAL 9003
04 RAL 9005

Bu + trio S

Surface indoor luminarie with adjustable beams made of steel. Driver included.

2055

3x13W
3x25W

17°-24°-40°-60°

2700K
3000K
4000K

3x900lm / 3x1750lm
3x1050lm / 3x2050lm
3x1100lm / 3x2150lm

69lm/W-70lm/W
81lm/W-82lm/W
85lm/W-86lm/W

CRI >90

L70 >50.000h



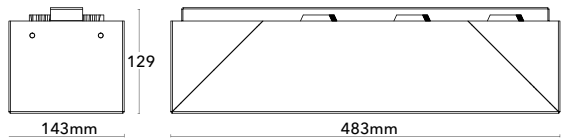



01 04 01 RAL 9003
04 RAL 9005



Duk + ED

Recessed indoor frameless luminarie in aluminium equipped with a directional projector. Driver included.

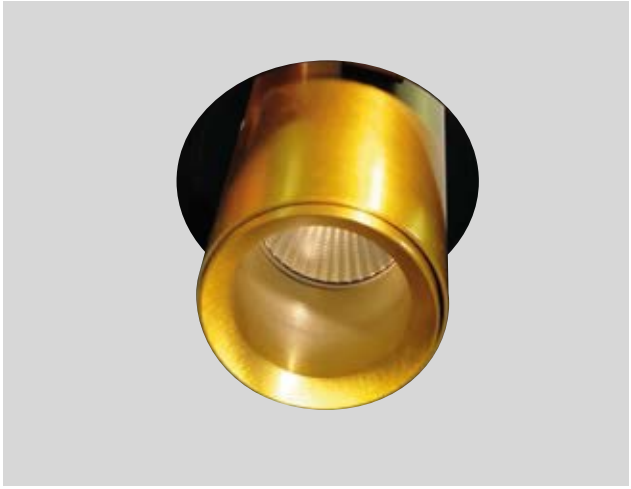

2062

9W

20°-40°-60°

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h



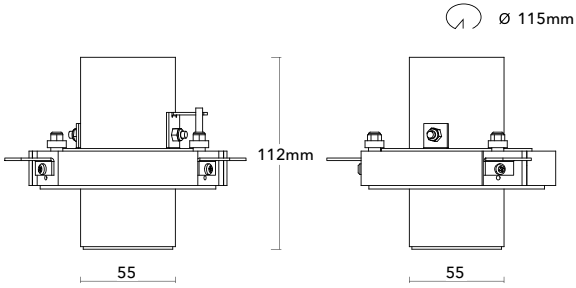

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

ELEC incl. · McA 3 · 0,5m · 850° · IP 20 · 220 VAC · 66mm

01 04

01 RAL 9003
04 RAL 9005

Du + S

Surface indoor luminarie with adjustable beams made of steel. Driver included.

2057

9W

20º-40º-60º

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h



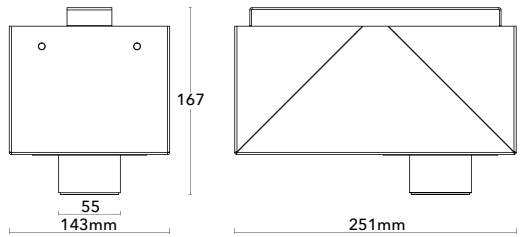

01 04

01 RAL 9003
04 RAL 9005

Du + duo S

Surface indoor luminarie with two independent adjustable light sources. Made of steel. Driver included.

2058

2x9W

20º-40º-60º

2700K
3000K
4000K

2x700lm
2x800lm
2x900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h



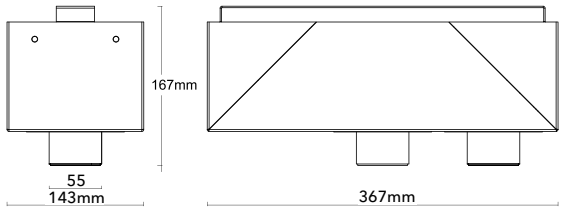



01 04

01 RAL 9003
04 RAL 9005



Du + trio S

Surface indoor luminarie with three independent adjustable light sources. Made of steel. Driver included.

2059

3x9W

20°-40°-60°

2700K
3000K
4000K

3x700lm
3x800lm
3x900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h



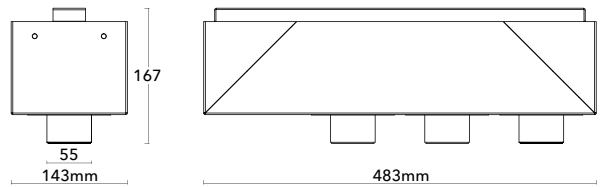

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

ELEC incl. · McA 3 · 0,5m · 850° · IP 20 · 220 VAC

01 04

01 RAL 9003
04 RAL 9005

Care + 55E

Recessed adjustable indoor luminarie in aluminium.
Driver included.

2098

9W

20°-40°-60°

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h



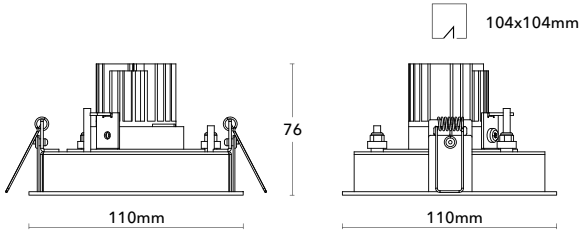

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

ELEC incl. · McA 3 · 0,5m · 850° · CE · IP 20 · 220 VAC · 104x104mm

01 04

01 RAL 9003
04 RAL 9005

Care + duo 55E

Recessed indoor luminarie in aluminium with two spotlights. Driver included.

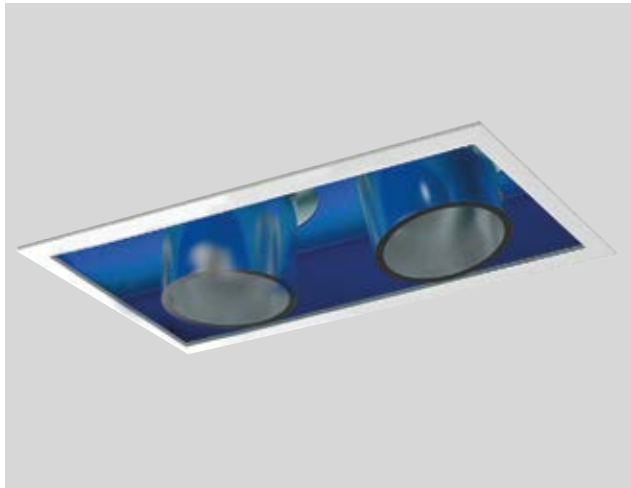

2104

2x9W

20°-40°-60°

2700K
3000K
4000K

2x700lm
2x800lm
2x900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h











01 04

01 RAL 9003
04 RAL 9005

Care + 90E

Recessed adjustable indoor luminarie in aluminium.
Driver included.

2100

13W
25W

17°-26°-40°-60°

2700K
3000K
4000K

900lm/1750lm
1050lm/2050lm
1100lm/2150lm

69lm/W-70lm/W
81lm/W-82lm/W
85lm/W-86lm/W

CRI >90

L70 >50.000h



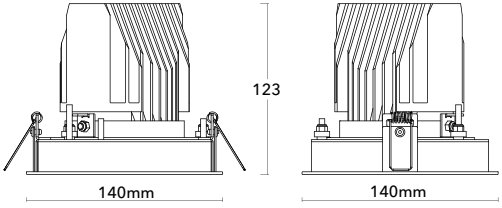

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

ELEC incl. · McA 3 · 0,5m · 850° · IP 20 · 220 VAC · 134x134mm

01 04

01 RAL 9003
04 RAL 9005

Care + duo 90E

Recessed adjustable indoor luminarie in aluminium.
Driver included.

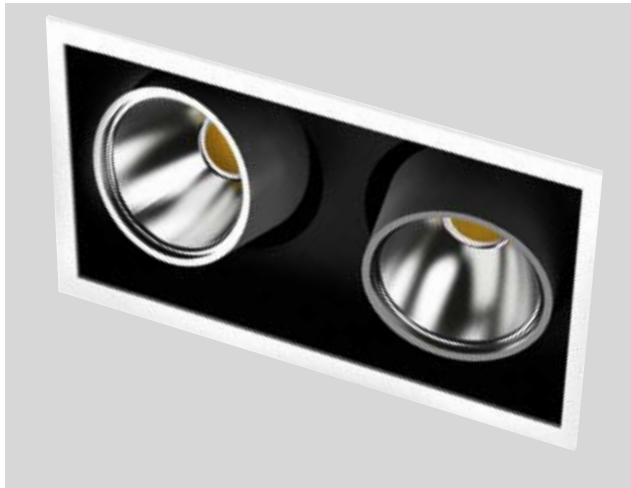

2106

2x13W
2x25W

17°-26°-40°-60°

2700K
3000K
4000K

2x900lm / 2x1750lm
2x1050lm / 2x2050lm
2x1100lm / 2x2150lm

69lm/W-70lm/W
81lm/W-82lm/W
85lm/W-86lm/W

CRI >90

L70 >50.000h











01 04

01 RAL 9003
04 RAL 9005

Bi + 25E

Recessed indoor luminarie in aluminium with antiglare reflector, equipped with high performance optical lens. Driver included.

**Consult about colored reflectors*

2034

4W

14º-39º

2700K
3000K
4000K On request
Bajo pedido

350lm
350lm
350lm

88lm/W
88lm/W
88lm/W

CRI >90

L90 >50.000h



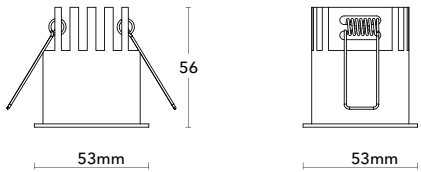

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

ELEC incl. · McA 3 · 0,5m · 850º · IP 20 · 220 VAC · 66mm

01 04 01 RAL 9003
04 RAL 9005

Bi + 55E

Recessed indoor luminarie in aluminium with antiglare reflector, equipped with high performance optical lens. Driver included.

**Consult about colored reflectors*

2076

9W

20°-40°-60°

2700K
3000K
4000K

700lm
800lm
900lm

78lm/W
89lm/W
100lm/W

CRI >90

L70 >50.000h





ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

ELEC incl. · McA 3 · 0,5m · 850° · IP 20 · 220 VAC · 66mm

01 04 01 RAL 9003
04 RAL 9005

Bi + 90E

Recessed indoor luminarie in aluminium with antiglare reflector and protective glass. Driver included.

**Consult about colored reflectors*

2077

13W
25W

14°-24°-40°-60°

2700K
3000K
4000K

900lm/1750lm
1050lm/2050lm
1100lm/2150lm

69lm/W-70lm/W
81lm/W-82lm/W
85lm/W-86lm/W

CRI >90

L70 >50.000h



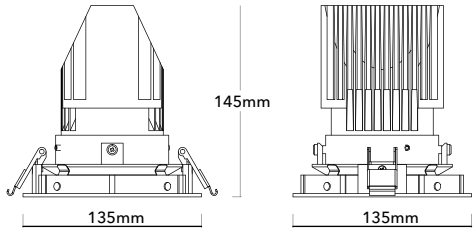





01 04

01 RAL 9003
04 RAL 9005

Strat XL S

Surface LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2200

9W

20°-40°-60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
86lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 60°

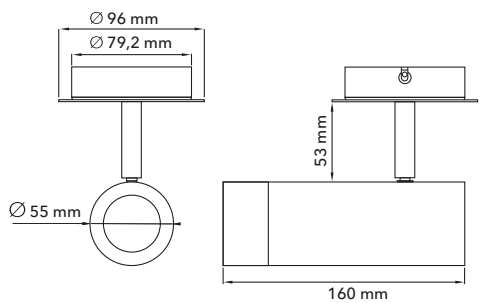

ON /OFF

L,C
PHASE-CUT
IGBT/TRIAC

01 04

01 RAL 9003
04 RAL 9005

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90° -90° | 355° | ELEC int.

Strat XL Tube On

Surface LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2202

9W

20°-40°-60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
86lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 60°

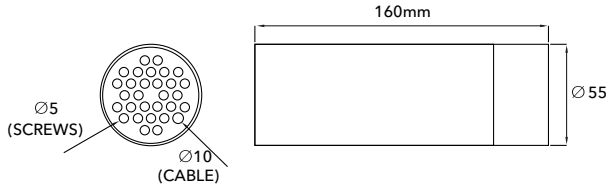

ON /OFF

L,C
PHASE-CUT
IGBT/TRIAC

01 04

01 RAL 9003
04 RAL 9005

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC int.

Strat XL Pendant

Pendant LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	SU - 2119	TU 3EU - 6200	CU - 6022
	9W	9W	9W
	20°-40°-60°	20°-40°-60°	20°-40°-60°
	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
	683lm 779lm 870lm	683lm 779lm 870lm	683lm 779lm 870lm
	76lm/W 86lm/W 97lm/W	76lm/W 86lm/W 97lm/W	76lm/W 86lm/W 97lm/W
CRI	>90	>90	>90
	L70 >50.000h	L70 >50.000h	L70 >50.000h
	CRI95 Disponible	CRI95 Disponible	CRI95 Disponible







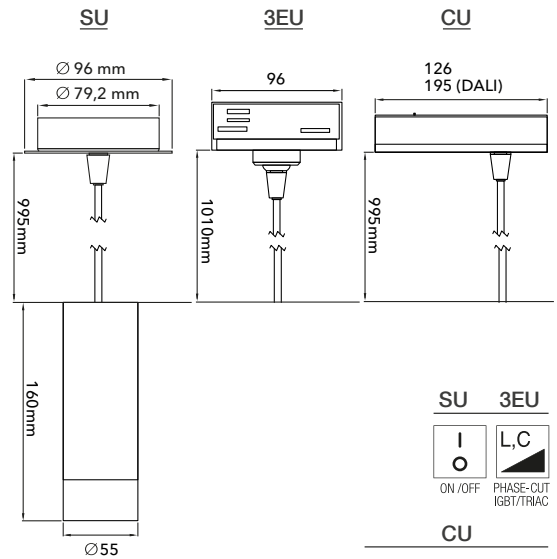

01 04

01 RAL 9003
04 RAL 9005

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC int.

Strat micro A

Surface LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2208

4W

14°-39°

2700K
3000K
4000K On request
Bajo pedido

350lm
350lm
350lm

88lm/W
88lm/W
88lm/W

CRI >90

L90 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	70	605
2m	141	151
3m	211	67

3000K 39°





ON /OFF

01 04 01 RAL 9003
04 RAL 9005

850º | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90º -90º | 355º | ELEC int.

Strat IN CF

Semi-recessed LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2204

9W

20°-40°-60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
87lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 60°

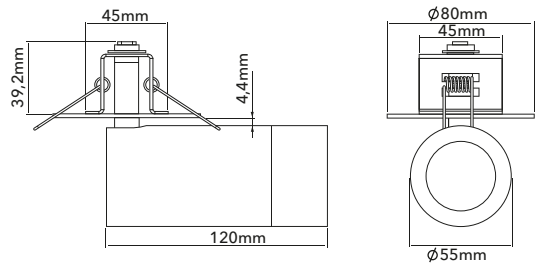

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 RAL 9003
04 RAL 9005

IP 20 · 220 VAC · +90° -90° · 355° · ELEC incl. · McA 3 · 0,5m · 850° · 70mm

Strat XL tube IN

Semi-recessed LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2203

9W

20°-40°-60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
87lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 60°

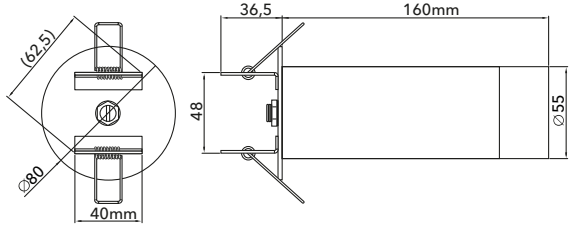

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

ELEC incl. · McA 3 · 0,5m · 850° · CE · IP 20 · 220 VAC · 65mm

01 04

01 RAL 9003
04 RAL 9005

Strat micro E

Semi-recessed LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2119

4W

14° 39°

2700K
3000K
4000K On request
Bajo pedido

350lm
350lm
350lm

88lm/W
88lm/W
88lm/W

CRI >90

L90 >50.000h

H(m)	D(cm)	Lux
1m	70	605
2m	141	151
3m	211	67

3000K 39°

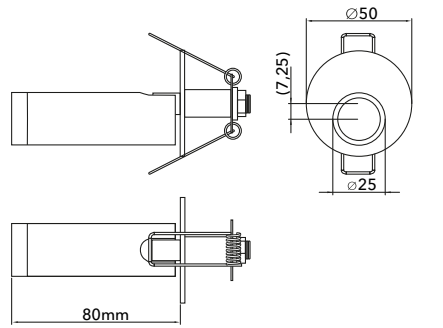

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04 01 RAL 9003 04 RAL 9005

IP 20 · 220 VAC · +90° -90° · 355° · ELEC incl. · McA 3 · 0,5m · 850° · 65mm

Strat micro C

LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

6020

4W

14° 39°

2700K
3000K
4000K On request
Bajo pedido

350lm
350lm
350lm

88lm/W
88lm/W
88lm/W

CRI >90

L90 >50.000h

H(m)	D(cm)	Lux
1m	70	605
2m	141	151
3m	211	67

3000K 39°

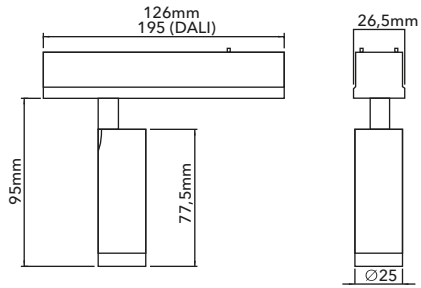

ON /OFF PUSH DALI

01 04

01 RAL 9003
04 RAL 9005

MAGNETIC 850º 0,5m McA 3 CE IP 20 48 VDC +90º -90º 355º ELEC int.

Strat C CF

LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

6203

9W

20°-40°-60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
86lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	34	2986
2m	68	746
3m	103	331

3000K 20°

H(m)	D(cm)	Lux
1m	69	1327
2m	139	331
3m	208	147

3000K 40°

H(m)	D(cm)	Lux
1m	93	852
2m	186	213
3m	279	94

3000K 60°

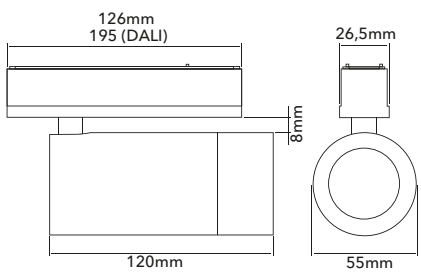

01 04

01 RAL 9003
04 RAL 9005

Strat XL C CF

LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

6208

9W

20° 40° 60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
86lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 60°

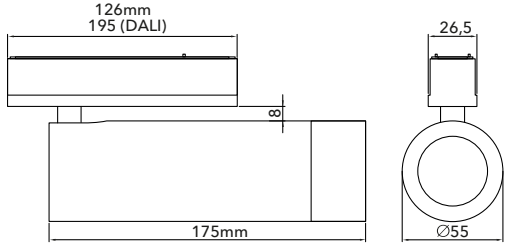

01 04

01 RAL 9003
04 RAL 9005



Strat XL Track

LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

6002

9W

20° 40° 60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
86lm/W
97lm/W

CRI >90

Monofásico Disponible

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 60°

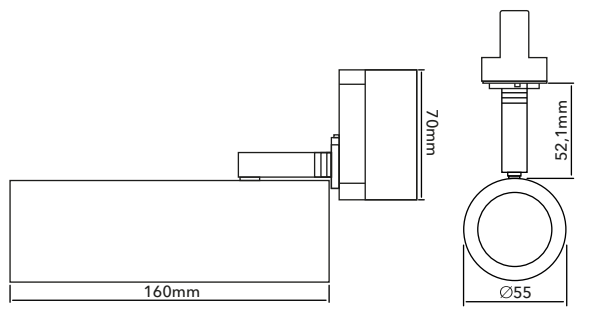

ON /OFF · PHASE-CUT IGBT/TRIAC · PUSH · DALI

01 04

01 RAL 9003
04 RAL 9005

850º · 0,5m · McA 3 · IP 20 · 48 VDC · +90º -90º · 355º · ELEC int.

Strat On Triple

Surface LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2009

3x9W

20°-40°-60°

2700K
3000K
4000K

3x683lm
3x779lm
3x870lm

76lm/W
86lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

x3 3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

x3 3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

x3 3000K 60°

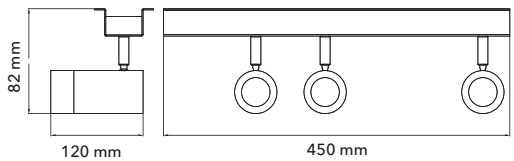

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

01 RAL 9003
04 RAL 9005

850° · 0,5m · McA 3 · CE · IP 20 · 220 VAC · +90° -90° · 355° · ELEC int.

Strat On

Surface LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2007

9W

20°-40°-60°

2700K
3000K
4000K

683lm
779lm
870lm

76 lm/W
86 lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20°

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 40°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 60°

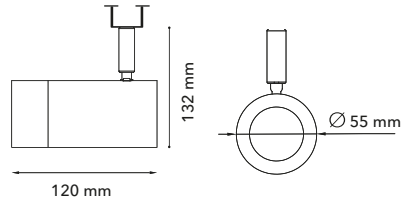

ON /OFF

L,C
PHASE-CUT
IGBT/TRIAC

01 04

01 RAL 9003
04 RAL 9005

850° 0,5m McA 3 IP 20 220 VAC +90° -90° 355° ELEC int.

Ave S EK/SR

Surface LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EK - 2201	SR - 2207
	5W	7,5W
	20°	10° 25° 40°
	3000K 4000K	2700K
	300lm 350lm	390lm - 10° 440lm - 25° 36°
	60lm/W 70lm/W	52lm/W 59lm/W
CRI	>90	95
	L70 >50.000h	>35.000h

H(m)	D(cm)	Lux
1m	40	2015
2m	80	504
3m	120	224

3000K 20° 5W EK

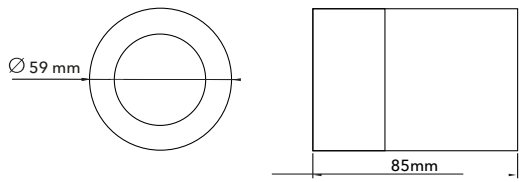

L,C PHASE-CUT — SR - Trailing edge only — I O ON /OFF

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC int.

01 04

01 RAL 9003
04 RAL 9005

Ave SU EK/SR

Pendant LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EK - 2220	SR - 2223
	5W	7,5W
	20°	10° 25° 40°
	3000K 4000K	2700K
	300lm 350lm	390lm - 10° 440lm - 25° 36°
	60lm/W 70lm/W	52lm/W 59lm/W
CRI	>90	95
	L70 >50.000h	>35.000h

H(m)	D(cm)	Lux
1m	40	2015
2m	80	504
3m	120	224

3000K 20° 5W EK

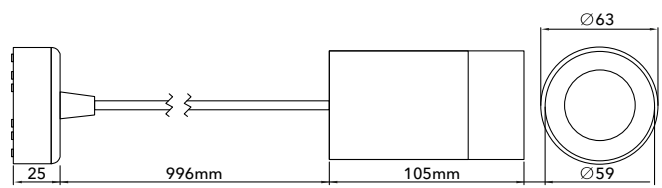

PHASE-CUT — SR - Trailing edge only — ON /OFF

01 04 01 RAL 9003 04 RAL 9005

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC int.

Ave A EK/SR

LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EK - 2212	SR - 2215
	5W	7,5W
	20°	10° 24° 36°
	3000K 4000K	2700K
	300lm 350lm	390lm - 10° 440lm - 25° 36°
	60lm/W 70lm/W	52lm/W 59lm/W
CRI	>90	95
	L70 >50.000h	>35.000h

H(m)	D(cm)	Lux
1m	40	2015
2m	80	504
3m	120	224

3000K 20° 5W EK

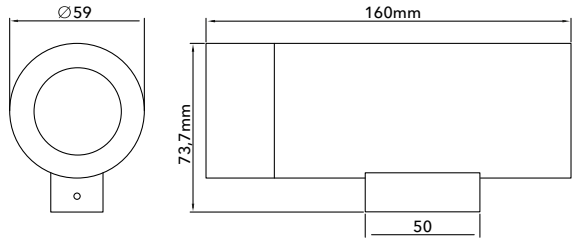

PHASE-CUT — SR - Trailing edge only — ON /OFF

01 04 01 RAL 9003 04 RAL 9005

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC int.

Ave 2A EK/SR

LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EK - 2216	SR - 2219
	2x5W	2x7,5W
	20°	10° 25° 36°
	3000K 4000K	2700K
	2x300lm 2x350lm	2x390lm - 10° 2x440lm - 25° 36°
	60lm/W 70lm/W	52lm/W 59lm/W
CRI	>90	95
	L70 >50.000h	>35.000h

H(m)	D(cm)	Lux
1m	40	2015
2m	80	504
3m	120	224

3000K 20° 5W EK

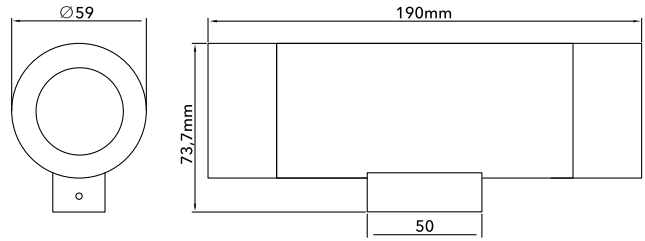

L,C PHASE-CUT — SR - Trailing edge only — ON /OFF

01 04 01 RAL 9003 04 RAL 9005

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | ELEC int.

Ave T EK/SR 3EU

LED projector. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

**Available mono-phase*

	EK - 6205	SR - 6207
	5W	7,5W
	20°	10° 25° 36°
	3000K 4000K	2700K
	300lm 350lm	390lm - 10° 440lm - 25° 36°
	60lm/W 70lm/W	52lm/W 59lm/W
CRI	>90	95
	L70 >50.000h	L70 >50.000h

H(m)	D(cm)	Lux
1m	40	2015
2m	80	504
3m	120	224

3000K 20° 5W EK

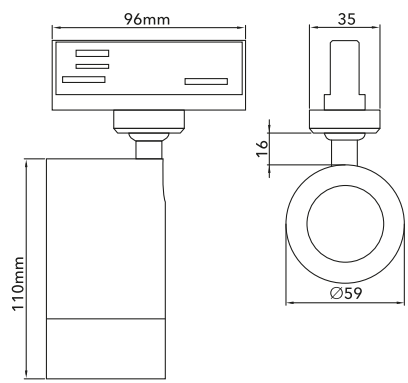

L,C PHASE-CUT — SR - Trailing edge only — I O ON /OFF

01 04 01 RAL 9003 04 RAL 9005

850° | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90° -90° | 355° | ELEC int.

Roff DL-LW ADJ

Donwlight LED recessed. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2209

9W

20° 40° 60°

2700K
3000K
4000K

683lm
779lm
870lm

76lm/W
87lm/W
97lm/W

CRI >90

L70 >50.000h

CRI95 Disponible

H(m)	D(cm)	Lux
1m	41	2710
2m	83	678
3m	124	301

3000K 20° 9W

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38° 9W

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55° 9W

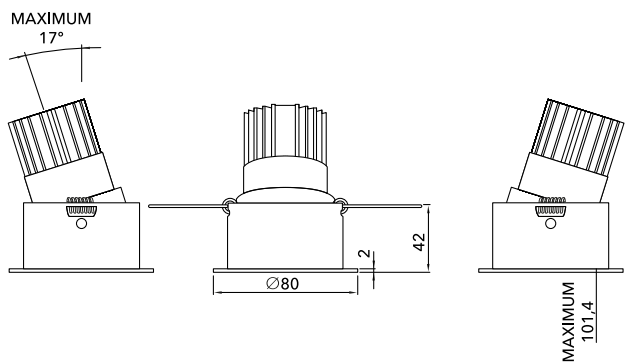

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

01 RAL 9003
04 RAL 9005

McA 3 · 0,5m · 850° · Emergency OPTIONAL · IP 20 FL040 · IP 40 FL055 FL060 · 220 VAC · +15° -15° 90X90mm · ELEC incl.

Spot Dot

LED light for magnetic rail. Body built in extruded aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

6208

3x4W

14° 39°

2700K
3000K
4000K On request
Bajo pedido

3x350lm
3x350lm
3x350lm

87lm/W
87lm/W
87lm/W

CRI >90

L70 >50.000h

H(m)	D(cm)	Lux
1m	70	605
2m	141	151
3m	211	67

3000K 39°

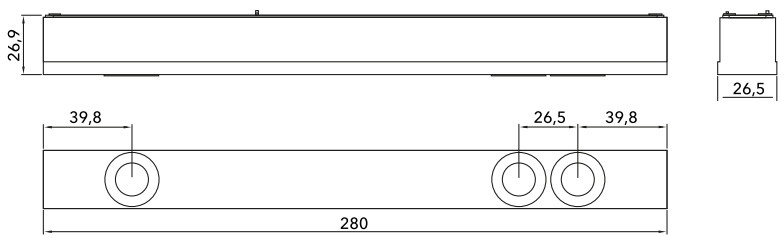



01 04 01 RAL 9003
04 RAL 9005

By

Square and rectangular LED recessed fix downlight with direct radiation. Body built in aluminium sheet and injected aluminium ring with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

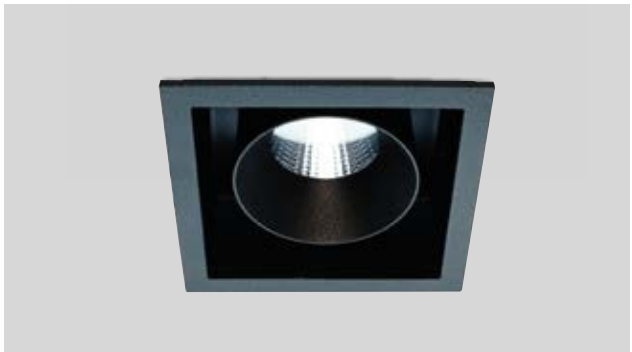

	2027	2029
	7W	2x7W
	24°	24°
	2700K 4000K	2700K 4000K
	529lm 654lm	2x529lm 2x654lm
	76lm/W 93lm/W	76lm/W 93lm/W
CRI	>90	>90
	L70 >50.000h	

H(m)	D(cm)	Lux
1m	34	2204
2m	68	551
3m	102	244

2700K 24°

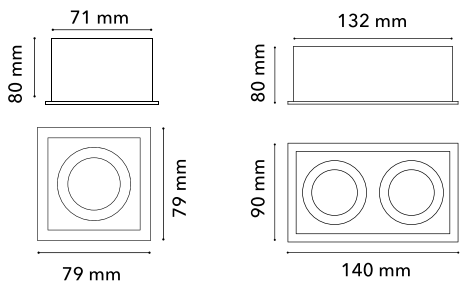



01 06 04



Sti

Square and rectangular LED recessed fix downlight with direct radiation. Body built in aluminium sheet and injected aluminium ring with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

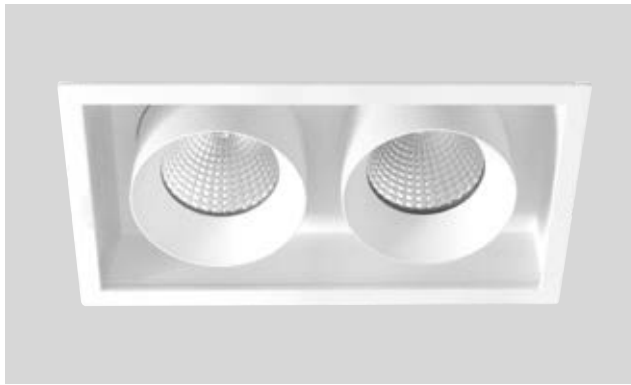

	2025	2026
	9W	2x9W
	20°-40°-60°	20°-40°-60°
	2700K 3000K 4000K	2700K 3000K 4000K
	683lm 779lm 870lm	2x683lm 2x779lm 2x870lm
	76lm/W 86lm/W 93lm/W	76lm/W 86lm/W 93lm/W
CRI	>90	>90
	L70 >50.000h	







ACCESORIOS / *ACCESSORIES*

FL055	Cristal transparente (50mm) *Transparent glass (50mm)*
FL060	Cristal glaseado (50mm) *Frosted glass (50mm)*
FL040	Panel de abeja (50mm) *Honeycomb (50mm)*

CRI95 Disponible





01 06 04



Wall 2

Surface square LED recessed fix downlight with direct radiation. Body built in aluminium sheet and injected aluminium ring with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

2028

2x7W

24°

2700K
4000K

2x529lm
2x603lm

86lm/W
93lm/W

CRI >90

L70 >50.000h

H(m)	D(cm)	Lux
1m	34	2204
2m	68	551
3m	102	244

2700K 24°



01 06 04

McA 3 | 850° | 0,5m | CE | IP 40 | 220 VAC | ELEC int.

Luc R

*Based on car industries technology

Rounded *LED recessed tilting downlight with direct radiation. Body built in injected aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.*

LM081R

12W

42°

3000K

1056lm

88lm/W

CRI 98

L70 >50.000h

H(m)	D(cm)	Lux
1m	75	2184
2m	150	546
3m	224	243

3000K 42°







01 04



OPTIONAL

Luc C

Square LED recessed tilting downlight with direct radiation. Body built in injected aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

*Based on car industries technology

LM081C

12W

42°

3000K

1056lm

88lm/W

CRI 98

L70 >50.000h

H(m)	D(cm)	Lux
1m	75	2184
2m	150	546
3m	224	243

3000K 42°







01 04



Luc double

Rectangular LED recessed tilting downlight with direct radiation. Body built in injected aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

*Based on car industries technology

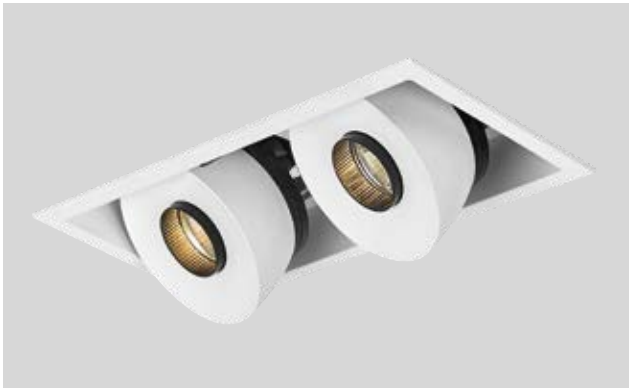

LM081D

2x15W

42°

3000K

2x1056lm

88lm/W

CRI 97

L70 >50.000h

H(m)	D(cm)	Lux
1m	74	2960
2m	147	740
3m	221	329

3000K 42°





ON /OFF | PHASE-CUT IGBT/TRIAC | 1-10V | PUSH | DALI

01 04

McA 2 | 0,5m | 960° | Emergency (OPTIONAL) | CE | IP 43 | 220 VAC | 70x135mm | ELEC incl.

Luc Max

Rounded LED recessed tilting downlight with direct radiation. Body built in injected aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

*Based on car industries technology

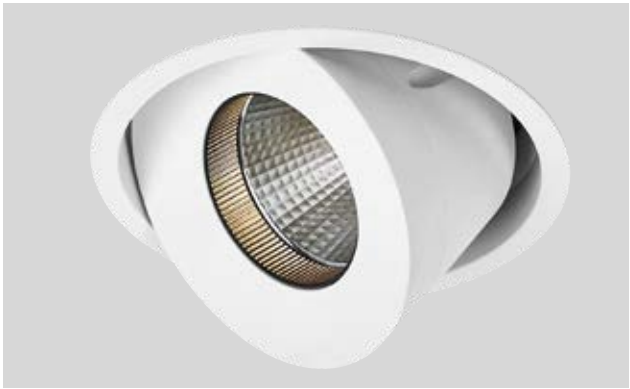

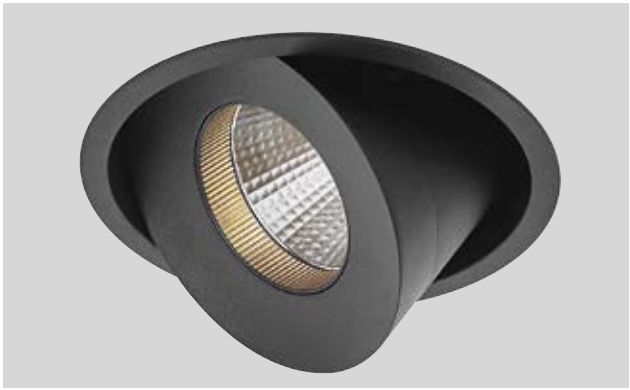

LM081

28W

40°

3000K

2438lm

87lm/W

CRI 92

L70 >50.000h

H(m)	D(cm)	Lux
1m	82	4993
2m	165	1248
3m	247	555

3000K 45°







01 04



OPTIONAL

Blak series

Rounded LED recessed fix downlight with direct radiation. Body built in aluminium sheet and injected aluminium ring with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	LM078	LM079
	15W	12W
	38°	45°
	3000K	3000K
	1000lm	900lm
	67lm/W	75lm/W
CRI	>90	>90
	L70 >50.000h	

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55°

LM079





LM078





LM078 — ON /OFF

LM079 — ON /OFF; PHASE-CUT IGBT/TRIAC; 1-10V; PUSH; DALI

McA 2 · 0,5m · 850° · Emergency (OPTIONAL) · CE · IP 20 FL040 · IP 44 FL055 FL060 · 220 VAC · 78mm · ELEC incl.

01 04

Med Isa

Circular LED recessed asymmetric fix downlight with direct radiation. Body built in injected aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

EM011

9W

20°-40°-60°

2700K
3000K
4000K

683lm
779lm
870lm

76 lm/W
86 lm/W
97lm/W

CRI 90

L70 >50.000h

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55°

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

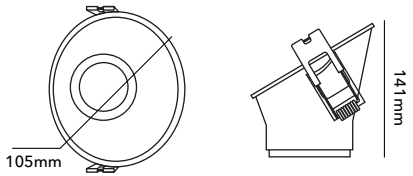

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

McA 2 · 0,5m · 850° · Emergency OPTIONAL · CE · IP 20 FL040 · IP 40 FL055 FL060 · 220 VAC · 105mm · ELEC incl.

Gru

Circular LED recessed fix downlight with direct radiation. Body built in injected aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM310	EM301
	9W	7,5W
	20°-40°-60°	36°
	2700K 3000K 4000K	2700K
	683lm 779lm 870lm	410lm
	76 lm/W 86 lm/W 97lm/W	55lm/W
CRI	90	95
	L70 >50.000h	L70 >50.000h



ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

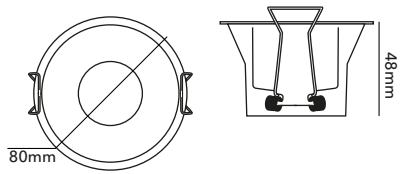



01 04



Med

Circular LED recessed fix downlight with direct radiation. Body built in injected aluminium with high efficiency and low luminance specular reflector. Equipped with passive dissipation LED module.

	EM310	EM301
	9W	7,5W
	20°-40°-60°	36°
	2700K 3000K 4000K	2700K
	683lm 779lm 870lm	410lm
	76 lm/W 86 lm/W 97lm/W	55lm/W
CRI	90	95
	L70 >50.000h	L70 >50.000h

H(m)	D(cm)	Lux
1m	74	1403
2m	147	351
3m	221	156

3000K 38°

H(m)	D(cm)	Lux
1m	101	939
2m	202	235
3m	303	104

3000K 55°

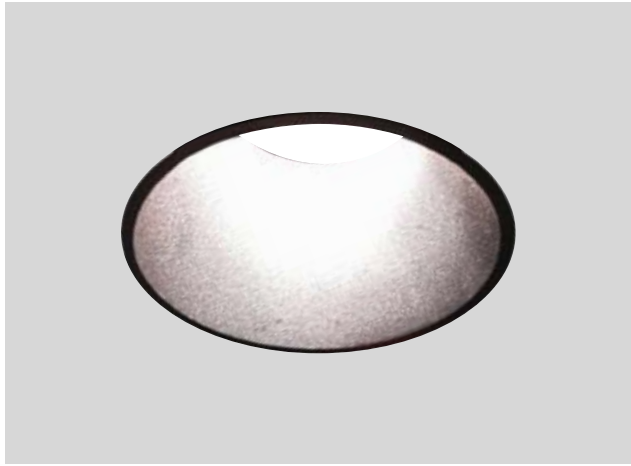

ACCESSORIES

Transparent glass (50mm)
Frosted glass (50mm)
Honeycomb (50mm)

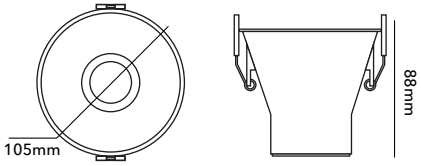

ON /OFF · PHASE-CUT IGBT/TRIAC · 1-10V · PUSH · DALI

01 04

McA 2 · 0,5m · 850° · Emergency OPTIONAL · CE · IP 20 FL040 · IP 40 FL055 FL060 · 220 VAC · 90mm · ELEC incl.

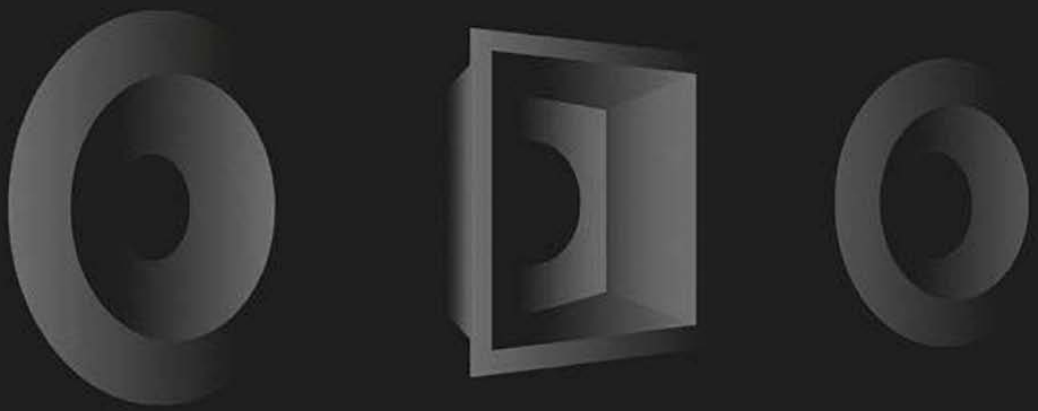

ACCESSORIES

Recessed fixed and tilting for ∅ 50mm lamps

CAA2500

Body built in aluminium injection.

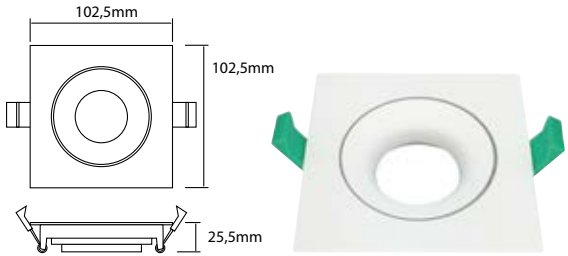

Accesories
Lampholder

01 06 04

CAA1500

Body built in aluminium injection.

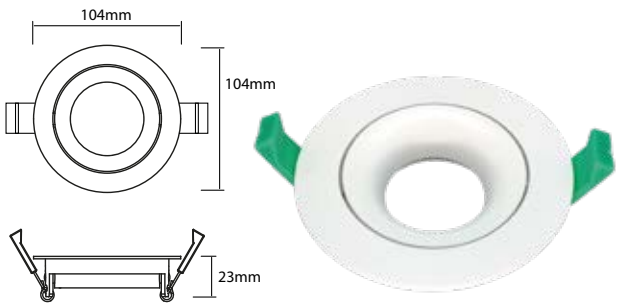

Accesories
Lampholder

01 06 04

CAA4500

Body built in aluminium injection.

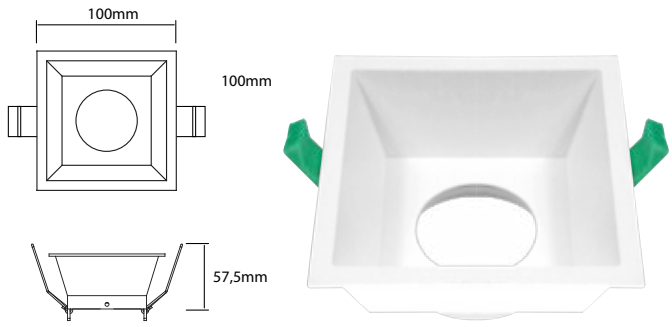

Accesories
Lampholder

01 06 04

CAA3500

Body built in aluminium injection.



Accesories

Lampholder

01 06 04

CAA0500

Body built in aluminium injection.



Accesories

Lampholder

01 06 04

Spo Torch

Body lamp for GU10 lamp.



ACCESORIES

Base Fix Point



**Lamp not included*

ON /OFF

01 04

850º | 0,5m | McA 3 | CE | IP 20 | 220 VAC | +90º -90º | 355º | ELEC int.

Wor lamp

Pendant body built in aluminium injection for GU10.

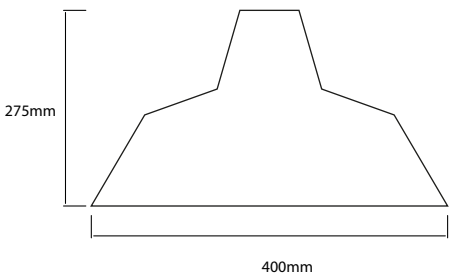

01 04

**Lamp not included*

Wor lamp Mini

Pendant body built in aluminium injection for GU10.

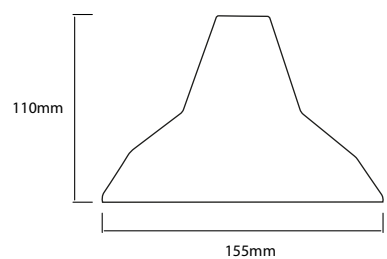

01 04

**Lamp not included*

Amezeus est une entreprise de Health Fit&Sport Group

A VOTRE SERVICE DEPUIS 1995

Route de Taillepied 44
1095 - Lutry
www.amezeus.com
info@amezeus.com
+41 21 903 57 67