

CATALOGUE PRODUITS

ÉCLAIRAGE D’EXTÉRIEUR

Suspensions, appliques et luminaires décoratifs.

Éclairage des terrasses, jardins et espaces d’accueil.

Route de Taillepied 44

1095 Lutry, Suisse

direction@amezeus.com

+41 21 903 57 67

amezeus.com



Nans



Nans S/16/H



Nans S/16/H



Nans Catenary S/16/4L













Nans Catenary S/16/4L



Nans S/16/H


- sunset club -



Nans S/21 | S/31 | S/31.2



Nans S/31



Nans S/3L | Indoor IP-20



Nans S/31




Nans S/3L | Indoor IP-20





Nans S/31

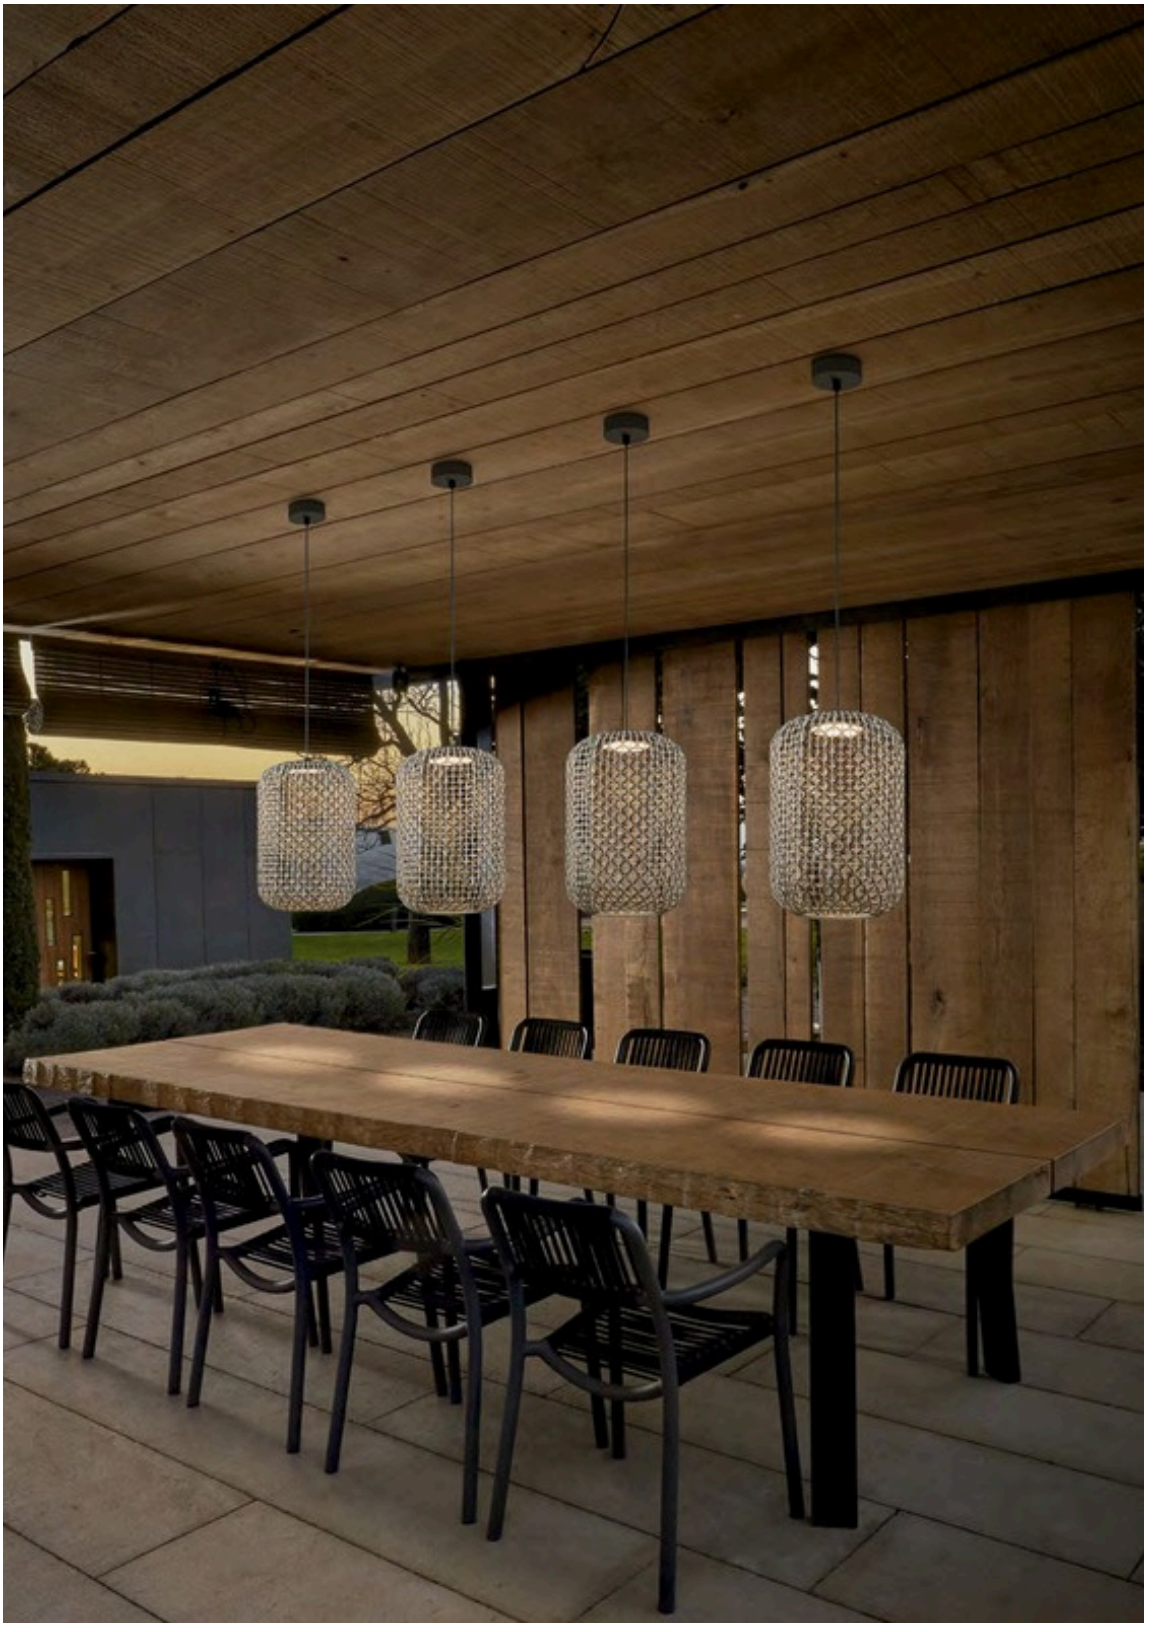

Nans S/31.2



Nans S/31.2



Nans S/16 | S/21 | S/31 | S/31.2



Nans S/31.2



Nans PF/31




Nans PF/31/Custom | PF/21



Nans A/02



Nans A/02

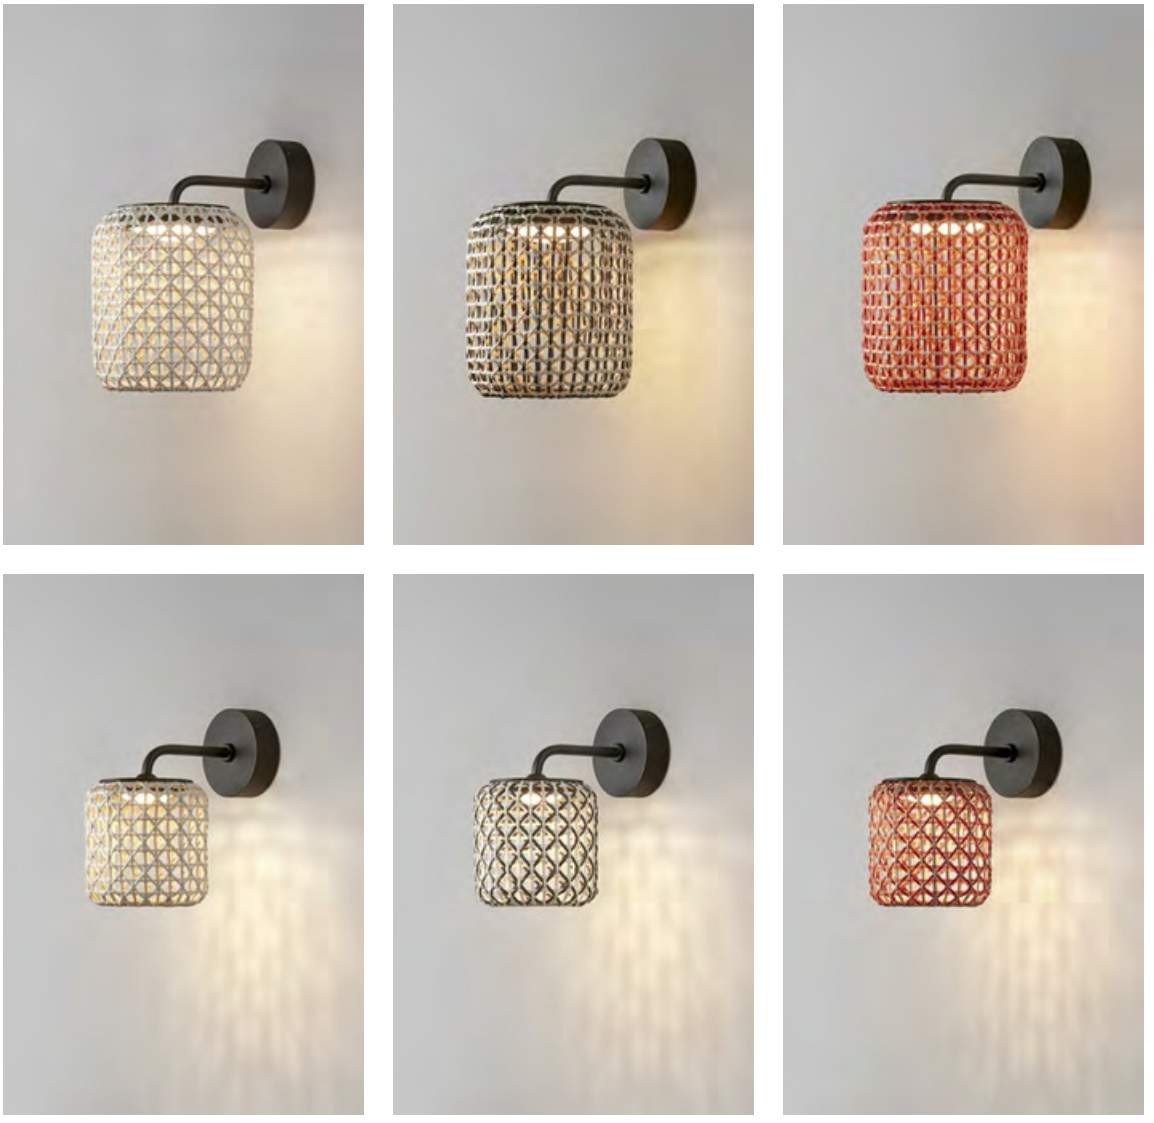

Acabados / *Finishing*



Roja / *Red*




Marrón / *Brown*



Beige / *Beige*


Sólo para pantallas Nans 31 / *Only for Nans 31 shades*



Roja / *Red*



Marrón / *Brown*




Beige / *Beige*


Nans A/02 | A/01



Nans A/01





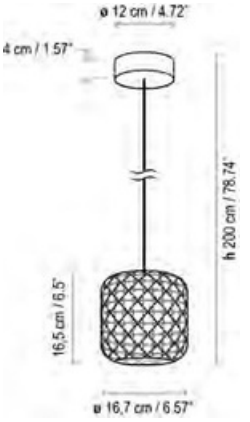

Nans A /01 IP-66

TRIAC | 6 W LED / CRI: 90 / 2700ºK
503 lm fuente de luz / *light source*

Nans A /02 IP-66

TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm fuente de luz / *light source*

Nans S /16 IP-66

TRIAC | 6 W LED / CRI: 90 / 2700ºK
503 lm fuente de luz / *light source*

Only for North America

Nans A /01 WET


TRIAC | 6 W LED / CRI: 90 / 2700ºK
466 lm light source


Nans A /02 WET


0-10V TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm light source

Nans S /16 WET

TRIAC | 6 W LED / CRI: 90 / 2700ºK
466 lm light source

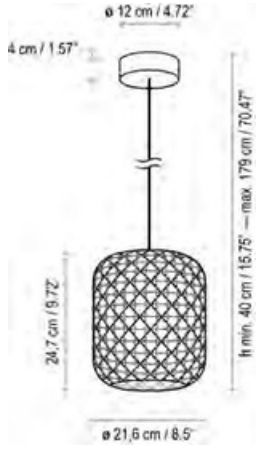

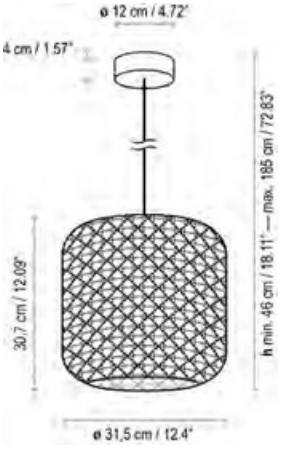

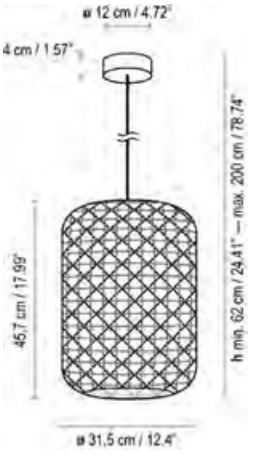

Nans S /21 IP-66

TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm fuente de luz / *light source*

Nans S /31 IP-66

TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm fuente de luz / *light source*

Nans S /31.2 IP-66

TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm fuente de luz / *light source*

Only for North America

Nans S /21 WET


0-10V TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm light source


Nans S /31 WET


0-10V TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm light source

Nans S /31.2 WET

0-10V TRIAC | 9,5 W LED / CRI: 90 / 2700ºK
1450 lm light source

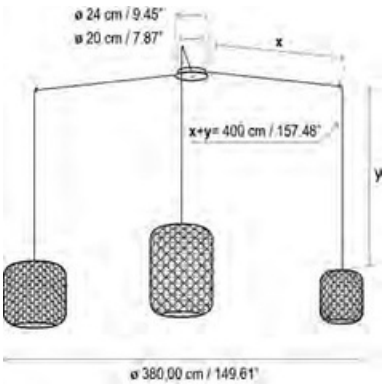

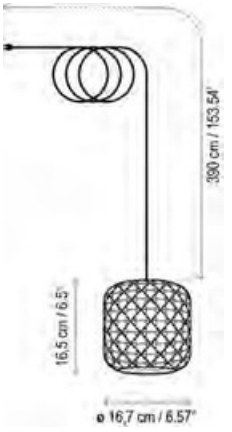

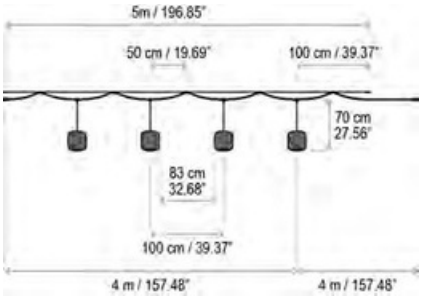

Nans S /3L INDOOR IP-20

TRIAC
3 x 9,5 W LED / CRI: 90 / 2700ºK
3 x 1450 lm fuente de luz / *light source*

Nans S /16/H IP-66

6 W LED / CRI: 90 / 2700ºK
503 lm fuente de luz / *light source*

Nans Catenary S /16/4L IP-66

4 x 6 W LED / CRI: 90 / 2700ºK
4 x 503 lm fuente de luz / *light source*

Only for North America

Nans S /3L DRY


0-10V TRIAC
3 x 9,5 W LED / CRI: 90 / 2700ºK
3 x 1450 lm light source

Nans S /16/H WET

6 W LED / CRI: 90 / 2700ºK
466 lm light source

Nans Catenary S /16/4L WET

4 x 6 W LED / CRI: 90 / 2700ºK
4 x 466 lm light source









Nans PF /16 IP-66

TRIAC
6 W LED / CRI: 90
2700ºK
503 lm fuente de luz
light source

Nans PF /21 IP-66

TRIAC
9,5 W LED / CRI: 90
2700ºK
1450 lm fuente de luz
light source

Nans PF /31 IP-66

TRIAC
9,5 W LED / CRI: 90
2700ºK
1450 lm fuente de luz
light source

Nans PF /31.2 IP-66

TRIAC
9,5 W LED / CRI: 90
2700ºK
1450 lm fuente de luz
light source

Only for North America

Nans PF /16 WET

TRIAC
6 W LED / CRI: 90
2700ºK
466 lm light source

Nans PF /21 WET

0-10V TRIAC
9,5 W LED / CRI: 90
2700ºK
1450 lm light source

Nans PF /31 WET


0-10V TRIAC
9,5 W LED / CRI: 90
2700ºK
1450 lm light source

Nans PF /31.2 WET

0-10V TRIAC
9,5 W LED / CRI: 90
2700ºK
1450 lm light source



Nans Sphere S/60 | S/80



Roja / *Red*





Marrón / *Brown*



Beige / *Beige*



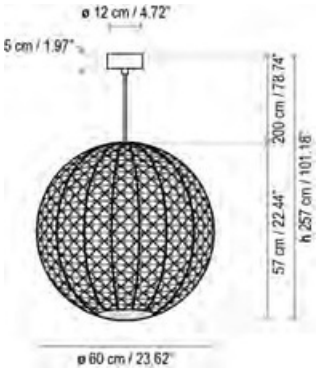

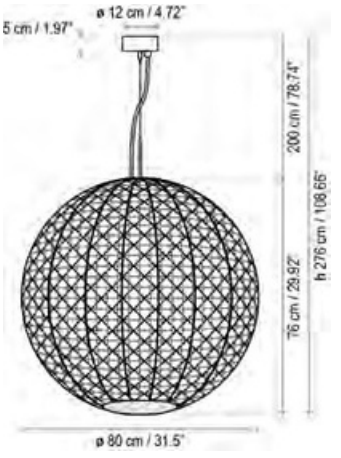

Nans Sphere S/60 IP-66

TRIAC | 14 W LED / CRI: 90 / 2700ºK
1400 lm fuente de luz / *light source*

Nans Sphere S/80 IP-66

TRIAC | 24 W LED / CRI: 90 / 2700ºK
2400 lm fuente de luz / *light source*

Only for North America

Nans Sphere S/60 WET

0-10V TRIAC | 14 W LED / CRI: 90 / 2700ºK
1400 lm light source


Nans Sphere S/80 WET


0-10V TRIAC | 24 W LED / CRI: 90 / 2700ºK
2400 lm light source



Nans Sphere PF/60



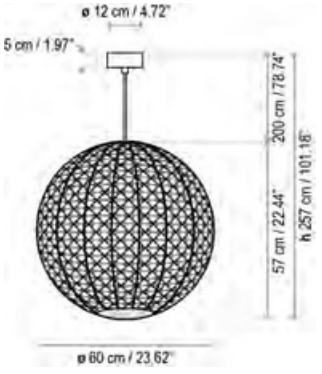

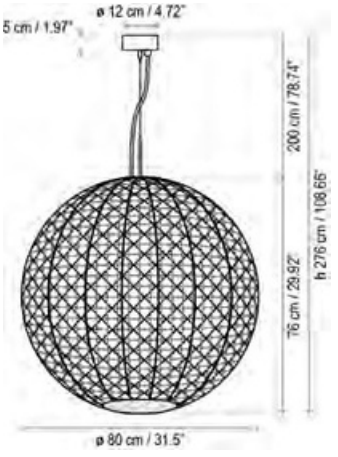

Nans Sphere PF/60 IP-66

TRIAC | 14 W LED / CRI: 90 / 2700ºK
1400 lm fuente de luz / *light source*

Nans Sphere PF/80 IP-66

TRIAC | 24 W LED / CRI: 90 / 2700ºK
2400 lm fuente de luz / *light source*


Only for North America

Nans Sphere PF/60 WET

0-10V | TRIAC | 14 W LED / CRI: 90 / 2700ºK
1400 lm light source

Nans Sphere PF/80 WET

0-10V | TRIAC | 24 W LED / CRI: 90 / 2700ºK
2400 lm light source

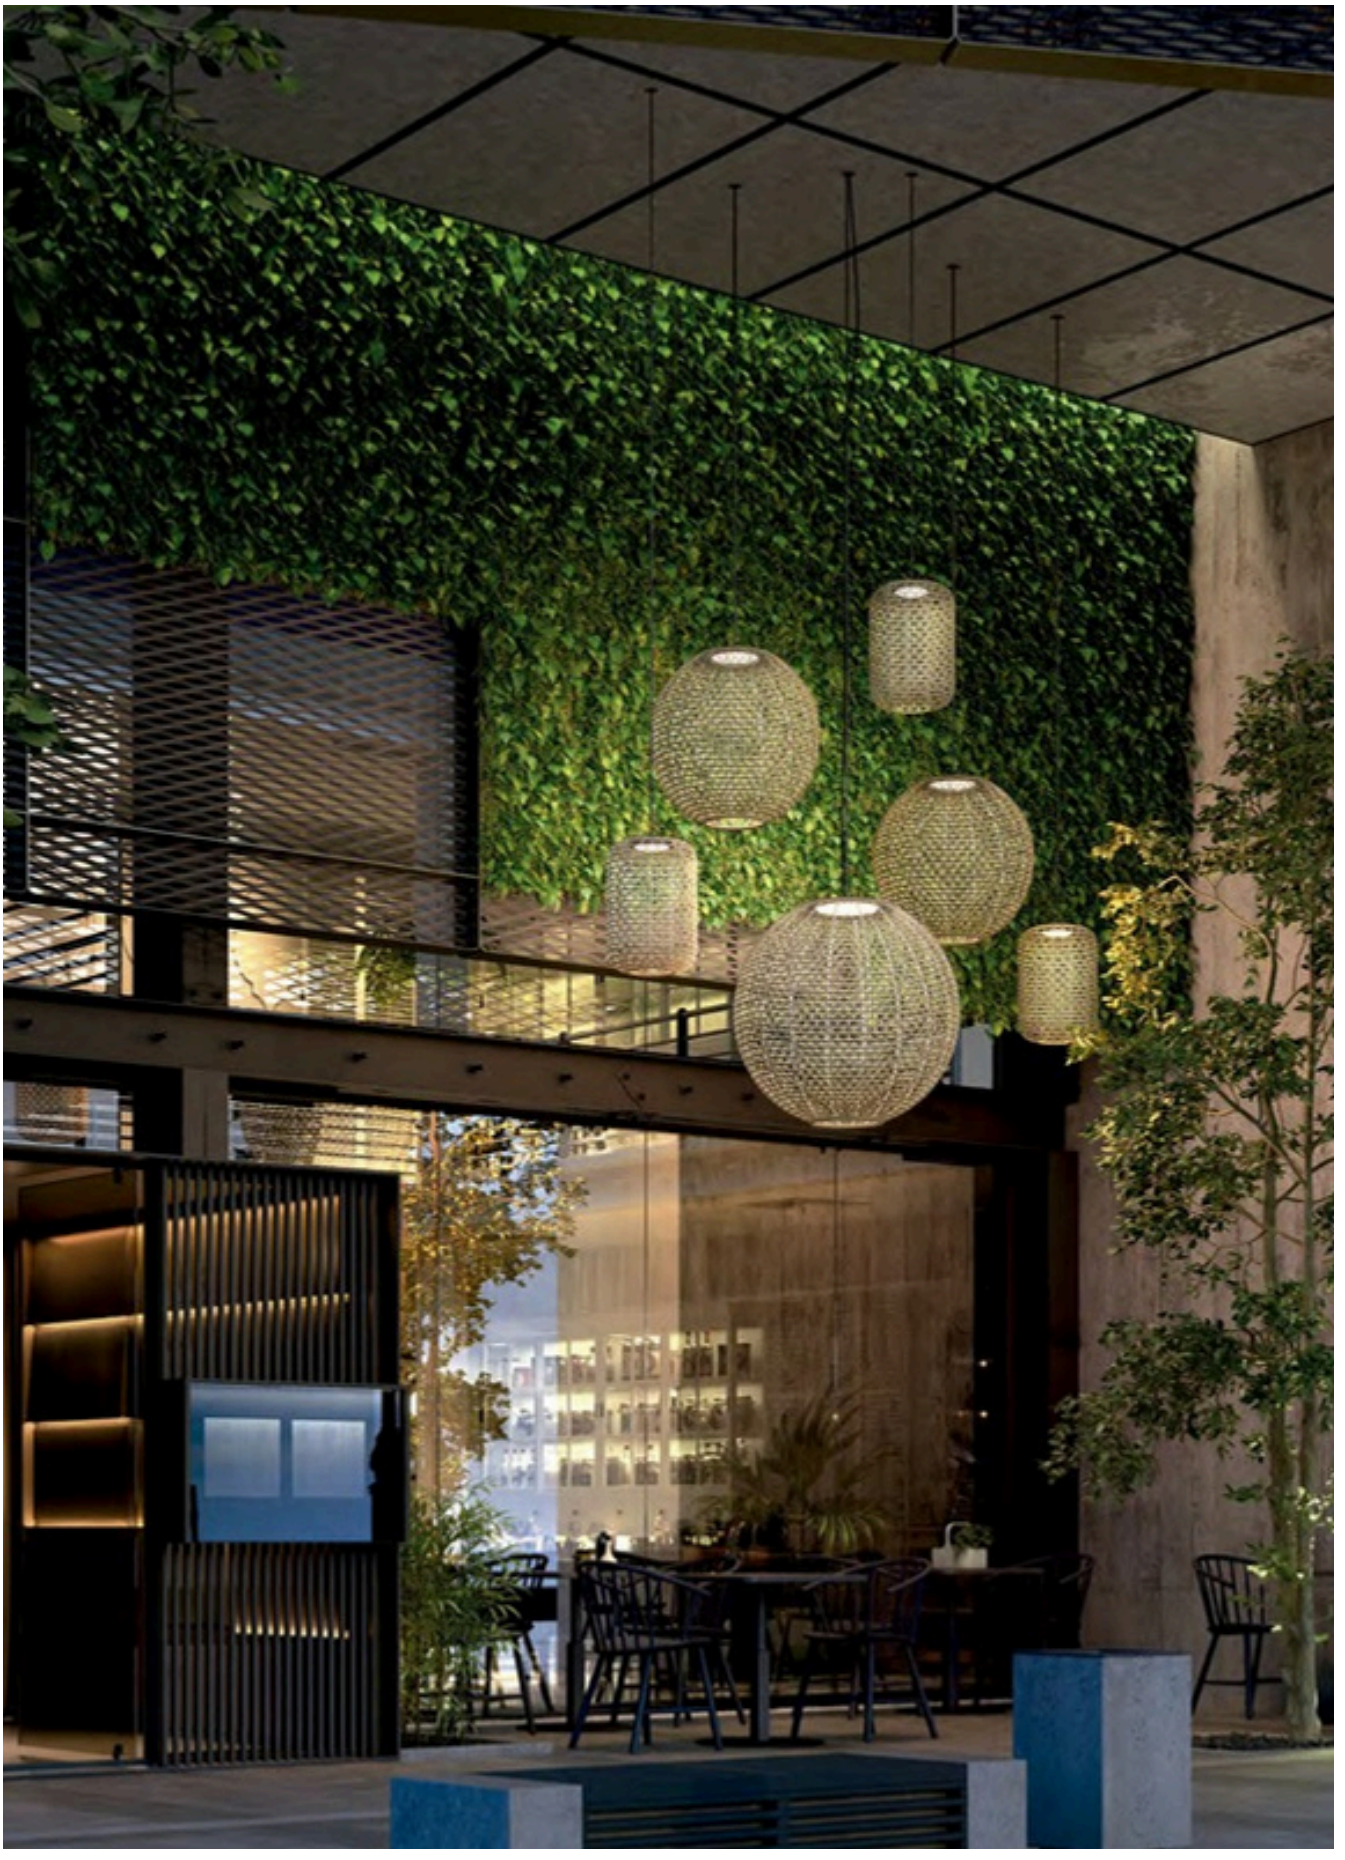

Nans



Nans Sphere S/60 | 80





Nans Portable M/41/R | M/49/R | Battery





Nans Nansa
Nans PortableM/49/R | Battery



Nans Portable M/41 | M/49



Nans Portable M/49/R | Battery




Nans M/21/R | Indoor | Battery



Nans M/21/R | Indoor | Battery



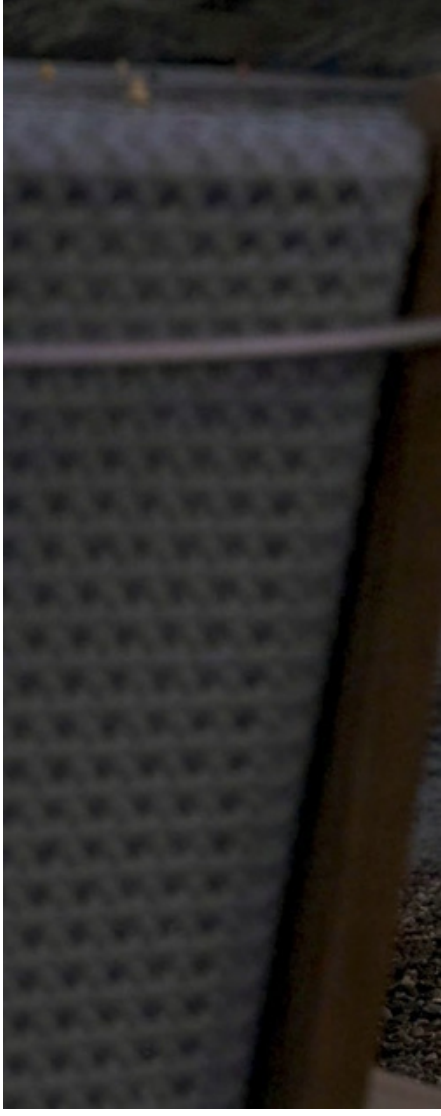



Nans M/21/R IP-20

3 W LED / CRI: 90 / 2700ºK
460 lm fuente de luz / *light source*


Only for North America

Nans M/21/R DRY

3 W LED / CRI: 90 / 2700ºK
460 lm light source

Nans M/21/R | Indoor | Battery







Nans Portable M/41 IP-65

6,3 W LED / CRI: 90 / 2700ºK
950 lm fuente de luz / *light source*

Nans Portable M/41/R IP-65

3 W LED / CRI: 90 / 2700ºK
460 lm fuente de luz / *light source*

Only for North America

Nans Portable M/41 WET

6,3 W LED / CRI: 90 / 2700ºK
950 lm light source

Nans Portable M/41/R WET

3 W LED / CRI: 90 / 2700ºK
460 lm light source





Nans Portable M/49 IP-65

6,3 W LED / CRI: 90 / 2700ºK
950 lm fuente de luz / *light source*

Nans Portable M/49/R IP-65

3 W LED / CRI: 90 / 2700ºK
460 lm fuente de luz / *light source*

Only for North America

Nans Portable M/49 WET

6,3 W LED / CRI: 90 / 2700ºK
950 lm light source

Nans Portable M/49/R WET

3 W LED / CRI: 90 / 2700ºK
460 lm light source



Noves fotos lídia nans



Garota P/02

Hotel Gran Meliá de Mar – Illetes / Mallorca



Nans Portable M/49/R | Battery



Hotel Gran Meliá de Mar – Illetes / Mallorca



Nans Portable M/49/R | Battery




Nut A/01




Nut A/01





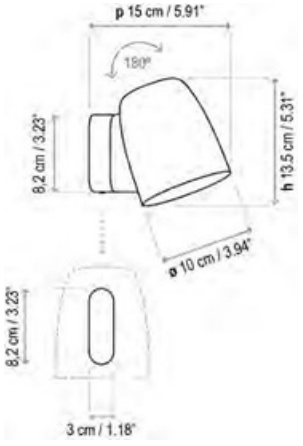



Nut A/01 IP-66

TRIAC | 6,3 W LED / CRI: 90 / 2700ºK
950 lm fuente de luz / *light source*

Only for North America

Nut A/01 WET

0-10V TRIAC | 6,3 W LED / CRI: 90 / 2700ºK
950 lm light source

Image does not show north American backplate



Negro / *Black*



Teja / *Terracotta*



Blanco / *White*



Gris claro / *Light grey*



Nut A/01




Nut A/01



Nut A/01 | PF/10







Nut PF/10 IP-66

TRIAC | 6,3 W LED / CRI: 90 / 2700ºK
950 lm fuente de luz / *light source*

Only for North America

Nut PF/10 WET

0-10V TRIAC | 6,3 W LED / CRI: 90 / 2700ºK
950 lm light source

Image does not show north American backplate

Nut PF/10



Nut A/01 | PF/10




Mediterrània S/105




Mediterrània S/105



Mediterrània PF/105



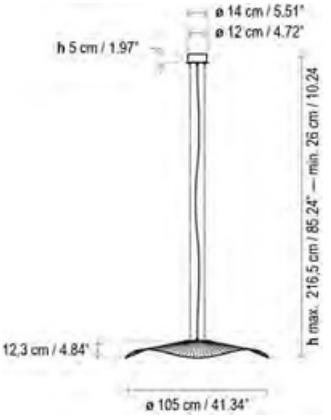

Mediterrània PF/105 IP-66

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Mediterrània S/105 IP-66

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Mediterrània PF/105 WET

0-10V TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source

Mediterrània S/105 WET

0-10V TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source



Mediterrània PF/105



Platet A/02 / Indoor



Platet A/01 / Outdoor



Platet A/01 Outdoor / Custom length





Platet A/01 IP66

4,2 W LED / CRI: 90 / 2700ºK
504 lm fuente de luz / *light source*




Only for North America

Platet A/01 WET

4,2 W LED / CRI: 90 / 2700ºK
504 lm light source



Sisal A/01

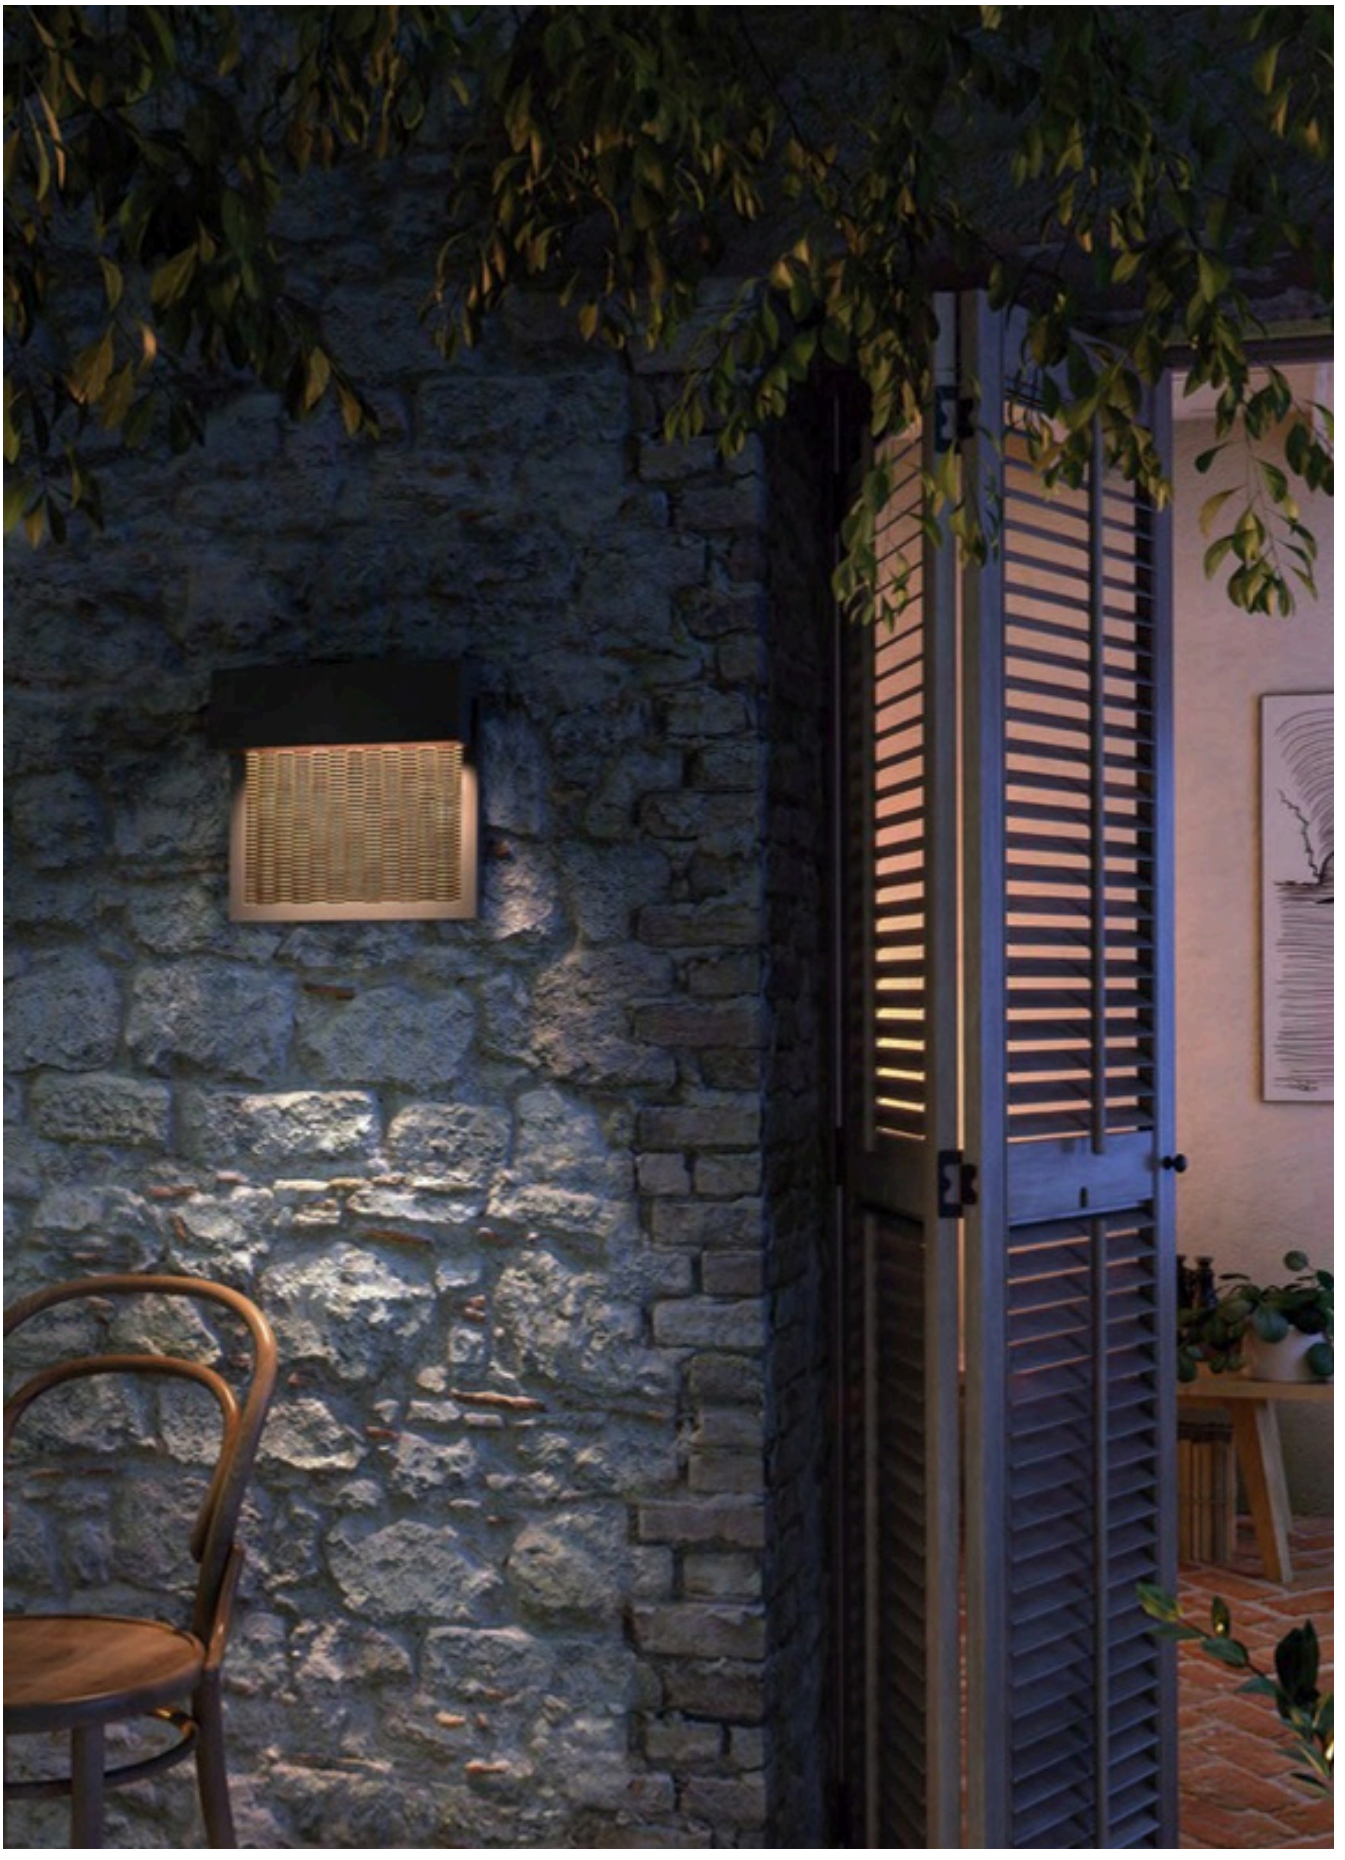



Sisal A/01



Sisal A/01







Sisal A/01 IP66

TRIAC | 9,1 W LED / CRI: 90 / 2700ºK
990 lm fuente de luz / *light source*

Only for North America

Sisal A/01 WET

TRIAC | 9,1 W LED / CRI: 90 / 2700ºK
990 lm light source


Acabados / *Finishing*



Frontal Metal Marrón
Brown Metal Frontal



Frontal Fibra Marrón
Brown Fiber Frontal



Frontal Fibra Beige Claro
Light Beige Fiber Frontal





Sisal A/01


02
01
Journalism
Philosophy
Psychology
Personality
Fiction
Ethics
Social media
Personality

Sisal A/01



Sisal A/01



Tanit M/29/R | Indoor | Battery



Tanit M/29/R IP20

1,5 W LED / CRI: 80 / 2700ºK
54 lm fuente de luz / *light source*

Only for North America

Tanit M/29/R DRY

1,5 W LED / CRI: 80 / 2700ºK
54 lm light source



Tanit M/29/R | Indoor | Battery



Tanit M/29/R | Indoor | Battery



Amphora



Amphora 03







Amphora 02

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet





Amphora IP-66

8 W LED / CRI: 90 / 2700ºK
642 lm fuente de luz / *light source*

Amphora 01 IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

TRIAC 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Amphora WET

8 W LED / CRI: 90 / 2700ºK
622 lm light source


Amphora 01 WET

2 x 10 W E26 LED A19

0-10V TRIAC 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

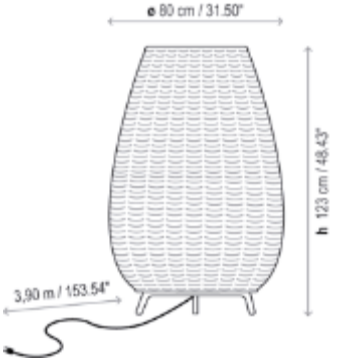

Amphora 02 IP-66

2 x 30 W CFL E-27


2 x 9 W LED E-27 A60

24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

TRIAC 24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

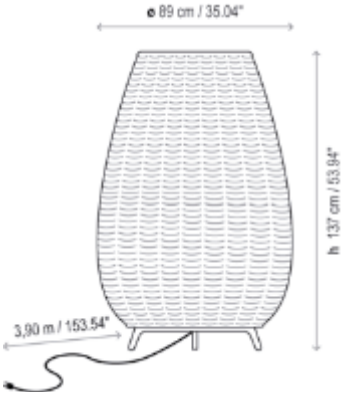

Amphora 03 IP-66

2 x 30 W CFL E-27

2 x 9 W LED E-27 A60

24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

TRIAC 24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

Only for North America

Amphora 02 WET

2 x 10 W E26 LED A19

0-10V TRIAC 24,7 W LED / CRI: 90 / 2700ºK
3000 lm light source

Amphora 03 WET

2 x 10 W E26 LED A19

0-10V TRIAC 24,7 W LED / CRI: 90 / 2700ºK
3000 lm light source

Acabados / *Finishing*



Marrón Grafito
Graphite Brown



Beige Claro
Light Beige




Marrón Rattan
Rattan Brown




Atticus B/66





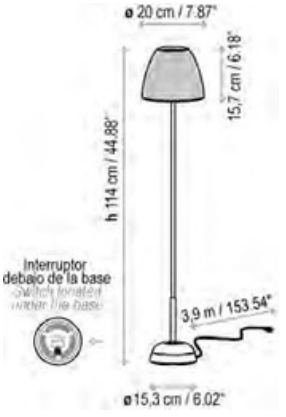

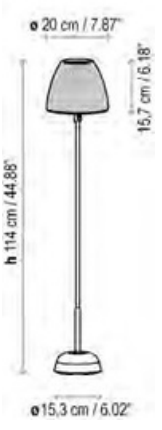

Atticus B/56 - B/66 IP-66

TRIAC | 8,4 W LED / CRI: 90 / 2700ºK
1122 lm fuente de luz / *light source*

Atticus P/114 IP-66

8,4 W LED / CRI: 90 / 2700ºK
1122 lm fuente de luz / *light source*

Atticus P/114/R IP-66

3,2 W LED / CRI: 90 / 2700ºK
400 lm fuente de luz / *light source*

Only for North America

Atticus B/56 - B/66 WET

TRIAC | 8,4 W LED / CRI: 90 / 2700ºK
1122 lm light source

Atticus P/114 WET

8,4 W LED / CRI: 90 / 2700ºK
1122 lm light source

Atticus P/114/R WET

3,2 W LED / CRI: 90 / 2700ºK
400 lm light source

Acabados / *Finishing*



Blanco Roto
Natural White



Marrón Grafito
Graphite Brown



Beige Claro
Light Beige



Marrón Rattan
Rattan Brown



Atticus P/114/R | Battery



Atticus B/56 | B/66





Atticus P/114 | P/114/R | Battery




Elipse S/30/H | S/50/H



Elipse PF/30

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

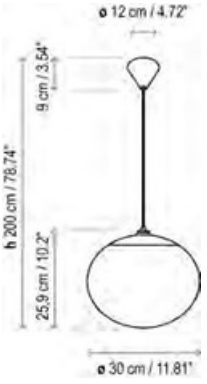

Elipse S/30 IP-66


2 x 14 W CFL E-27

2 x 6 W LED E-27 P45

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

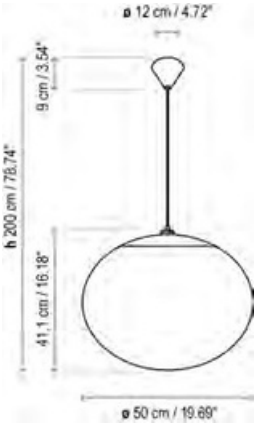

Elipse S/50 IP-66


2 x 14 W CFL E-27

2 x 6 W LED E-27 P45

TRIAC | 24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet



Elipse S/30H IP-66

2 x 14 W CFL E-27

2 x 6 W LED E-27 P45

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Elipse S/30 WET

2 x 10 W E26 LED A19

0-10V | TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source

Elipse S/50 WET

2 x 10 W E26 LED A19


0-10V | TRIAC | 24,7 W LED / CRI: 90 / 2700ºK
3000 lm light source

Elipse S/30H WET

2 x 10 W E26 LED A19


Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

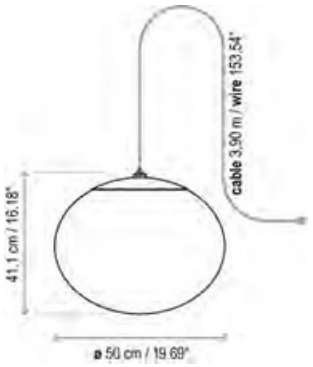

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet



Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet



Elipse S/50/H IP-66

2 x 14 W CFL E-27

2 x 6 W LED E-27 P45

24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

Elipse PF/30 IP-66

2 x 14 W CFL E-27

2 x 6 W LED E-27 P45

TRIAC

17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Elipse PF/50 IP-66

2 x 14 W CFL E-27

2 x 6 W LED E-27 P45

TRIAC

24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

Only for North America

Elipse S/50/H WET

2 x 10 W E26 LED A19

Elipse PF/30 WET

2 x 10 W E26 LED A19

0-10V TRIAC

17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source

Elipse PF/50 WET

2 x 10 W E26 LED A19

0-10V TRIAC

24,7 W LED / CRI: 90 / 2700ºK
3000 lm light source

Acabados / *Finishing*

Blanco Roto
Natural White

Blanco
White




Fora A



Fora M



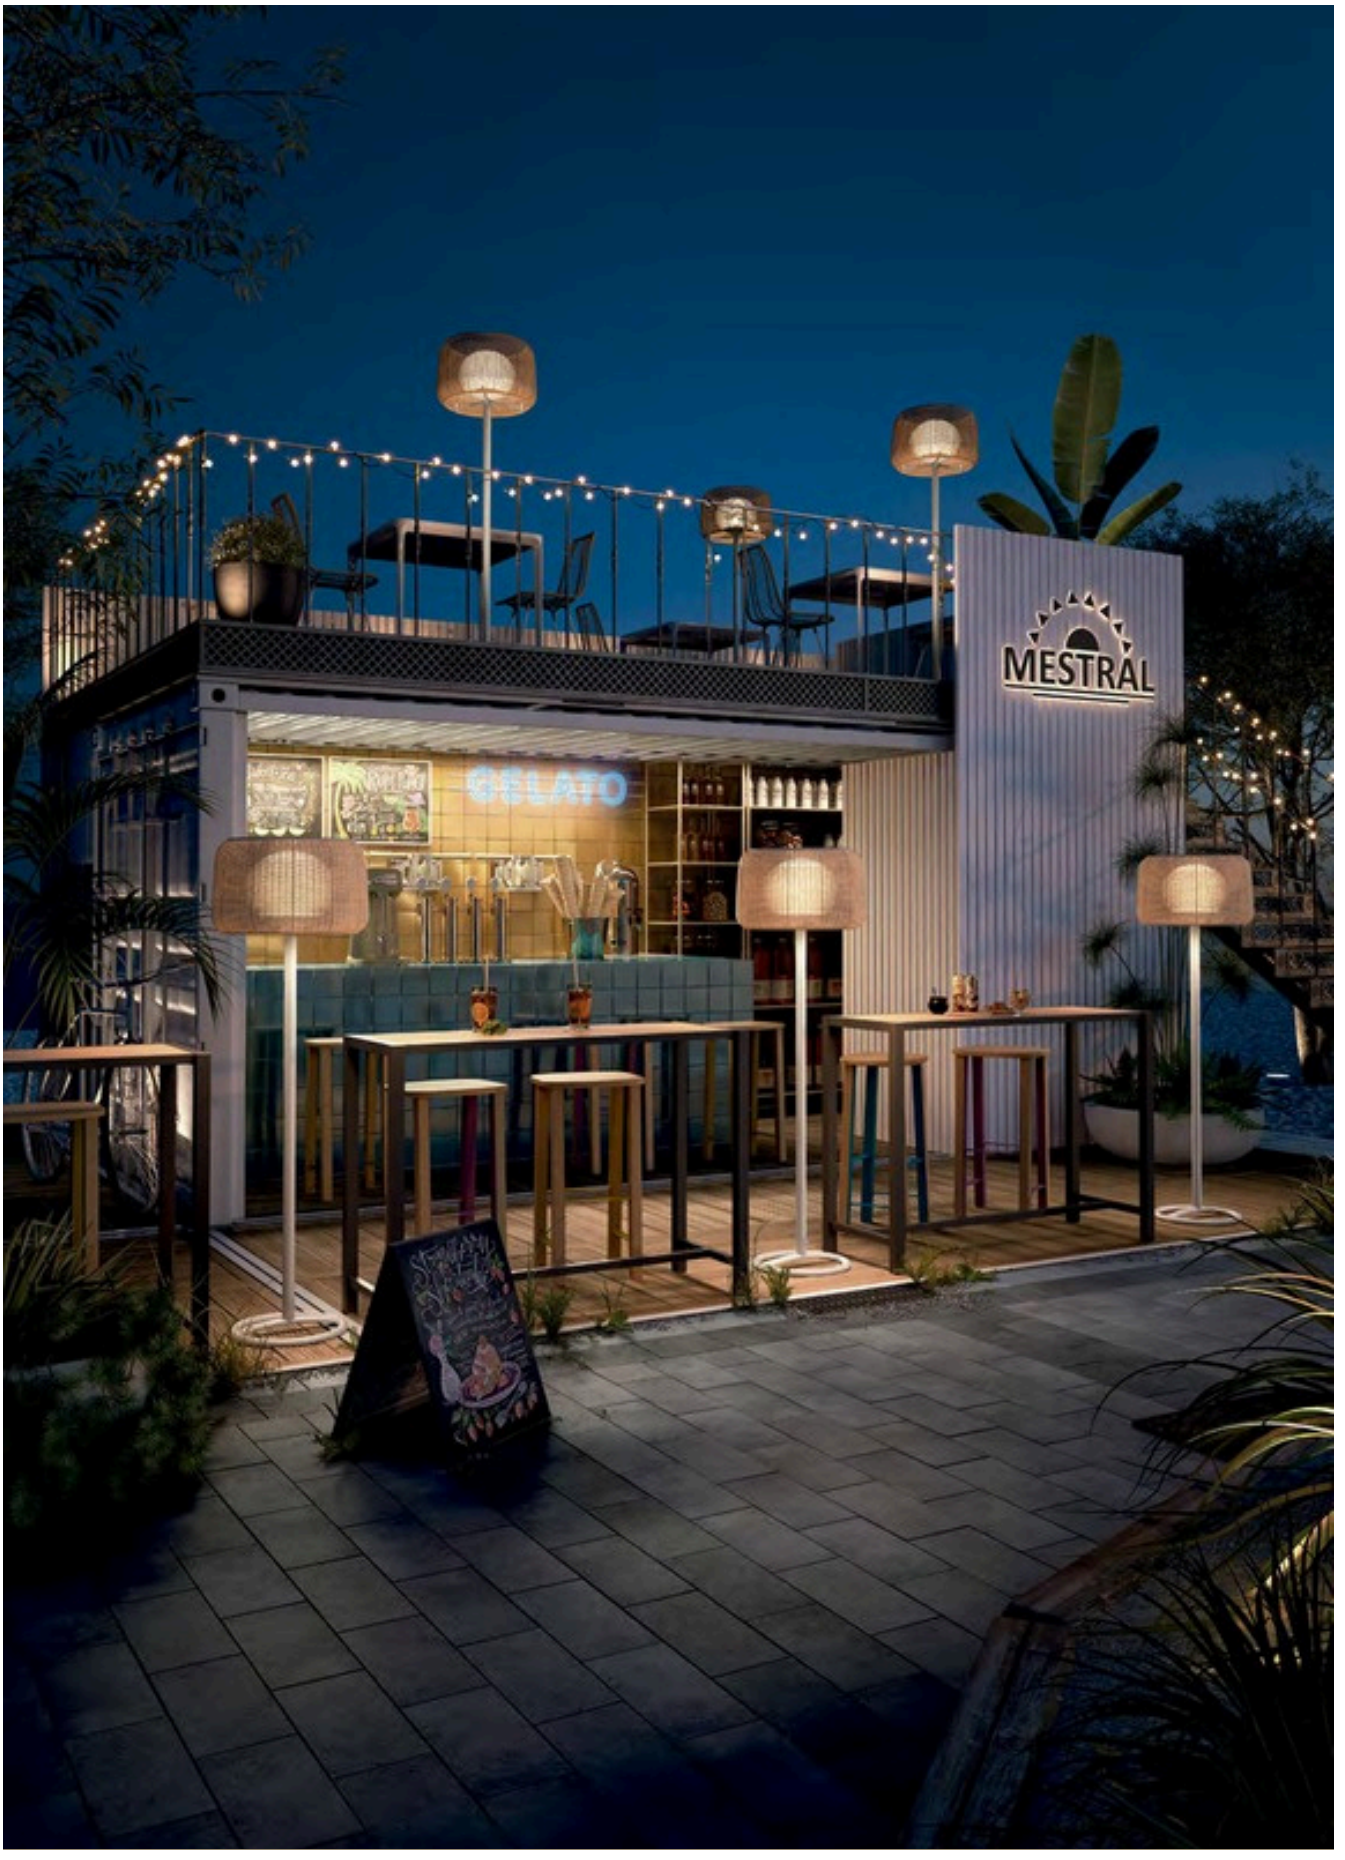

Fora P



Fora P



Hotel Gran Meliá Mar
Illetes / Mallorca



Fora P





Fora S



Fora 90


Moss Floristas / Madrid | Photographed by María Nieto Raventós




Fora PF

Opciones LED consultar dibujo técnico en la ficha técnica


LED options consult technical drawing in the cutsheet

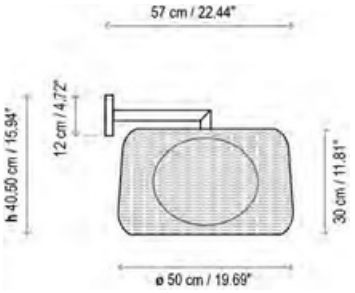



Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

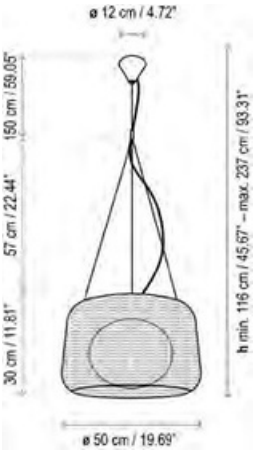

Fora A IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Fora PF IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Fora S IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Fora A WET

2 x 10 W E26 LED A19

0-10V | TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source

Fora PF WET

2 x 10 W E26 LED A19

0-10V | TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source


Fora S WET


2 x 10 W E26 LED A19


0-10V | TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

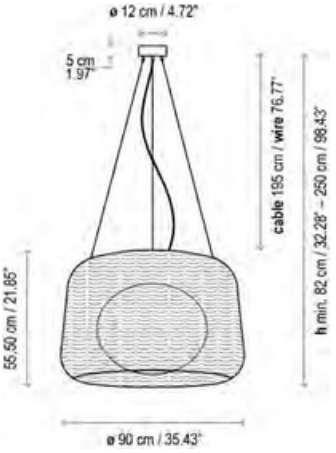



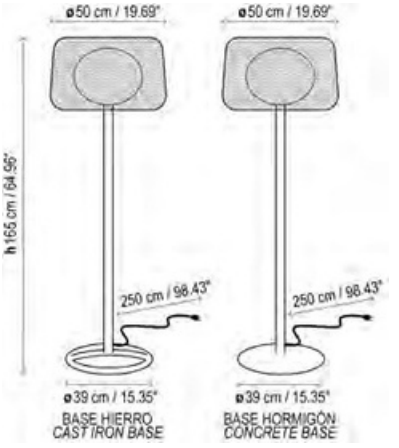

Fora 90 IP-66

2 x 30 W CFL E-27

2 x 9 W LED E-27 A60

TRIAC | 24,7 W LED / CRI: 90 / 2700ºK
3000 lm fuente de luz / *light source*

Fora M IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Fora P IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Fora 90 WET

2 x 10 W E26 LED A19

0-10V | TRIAC | 24,7 W LED / CRI: 90 / 2700ºK
3000 lm light source


Fora M WET

2 x 10 W E26 LED A19

Fora P WET

2 x 10 W E26 LED A19

Acabados / *Finishing*



Blanco Roto
Natural White

Marrón Grafito
Graphite Brown

Beige Claro
Light Beige

Marrón Rattan
Rattan Brown



Garota Hang



Garota M/36



Garota P/01



Maison Diez Company

Garota | Amphora



Garota Catenary S/27/4L



Garota PF/02



Garota Hang



Garota A/01



Glamp 2016, Zion Natural Park / United States
Photographed by Charlie Simmons



Hostal Empúries / L’escala


Garota P/02




Hotel Gran Meliá de Mar – Illetes / Mallorca



Garota







Garota A/01 IP-66

TRIAC | 8,4 W LED / CRI: 90 / 2700ºK
1122 lm fuente de luz / *light source*

Garota PF/01 IP-66

TRIAC | 8,4 W LED / CRI: 90 / 2700ºK
1122 lm fuente de luz / *light source*

Garota PF/02 IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Garota A/01 WET

TRIAC | 8,4 W LED / CRI: 90 / 2700ºK
1122 lm light source


Garota PF/01 WET

TRIAC | 8,4 W LED / CRI: 90 / 2700ºK
1122 lm light source

Garota PF/02 WET

2 x 10 W E26 LED A19

0-10V | TRIAC | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source

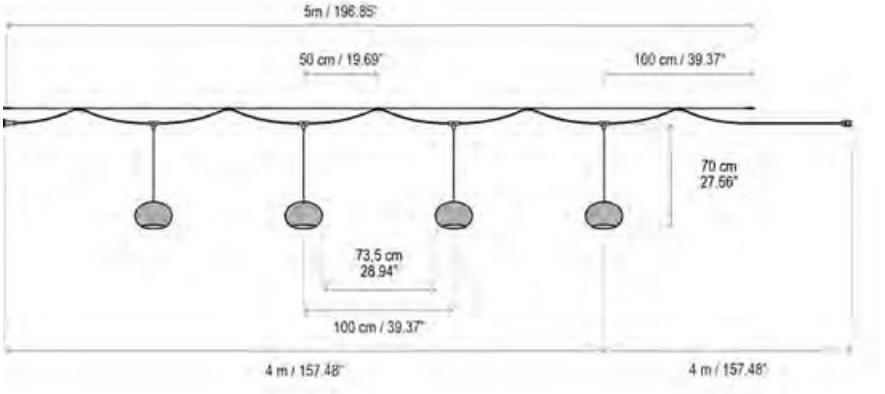

Garota Catenary S/27/4L IP-66

4 x 6 W LED / CRI: 90 / 2700ºK
4 x 503 lm fuente de luz / *light source*


Only for North America


Garota Catenary S/27/4L


TRIAC | 4 x 6 W LED / CRI: 90 / 2700ºK
4 x 466 lm light source

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

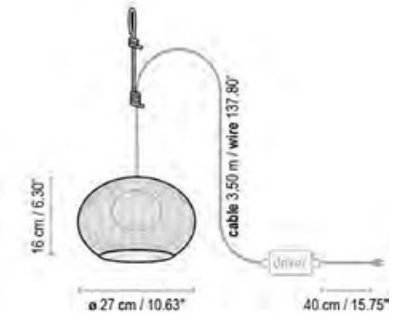

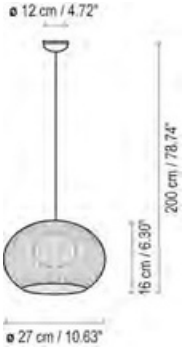

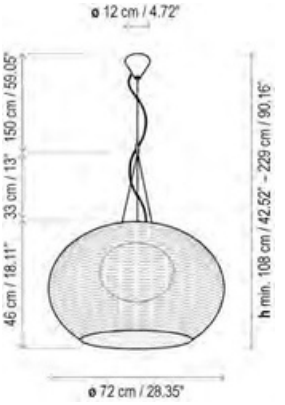

Garota Hang IP-66

8,4 W LED / CRI: 90 / 2700ºK
1122 lm fuente de luz / *light source*

Garota S/01 IP-66

TRIAC

8,4 W LED / CRI: 90 / 2700ºK
1122 lm fuente de luz / *light source*

Garota S/02 IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

TRIAC

17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Garota Hang WET

8,4 W LED / CRI: 90 / 2700ºK
1122 lm light source

Garota S/01 WET

TRIAC


8,4 W LED / CRI: 90 / 2700ºK
1122 lm light source

Garota S/02 WET

2 x 10 W E26 LED A19

0-10V TRIAC

17,1 W LED / CRI: 90 / 2700ºK
2064 lm light source



Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet



Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet



Garota M/36 IP-66

8,4 W LED / CRI: 90 / 2700ºK
1122 lm fuente de luz / *light source*

Garota P/01 IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

TRIAC 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Garota P/02 IP-66

2 x 22 W CFL E-27

2 x 9 W LED E-27 A60

17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

TRIAC 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Only for North America

Garota Hang WET

8,4 W LED / CRI: 90 / 2700ºK
1122 lm light source


Garota S/01 WET

2 x 10 W E26 LED A19

Garota S/02 WET

2 x 10 W E26 LED A19

Acabados / *Finishing*



Blanco Roto
Natural White

Marrón Grafito
Graphite Brown

Blanco Marfil
Ivory White


Marrón
Brown





Syra 60

Las Syra son productos ideales
para espacios que necesiten luz cálida y
elementos amables que ofrezcan buenas
dosis de confort.

Syra are ideal products for places that need warm light and friendly elements that offer plenty of comfort.

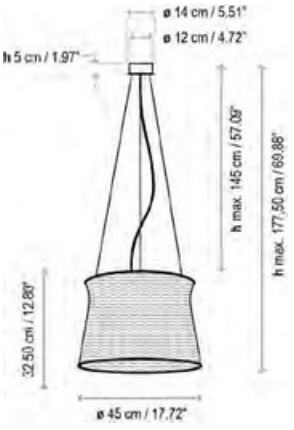

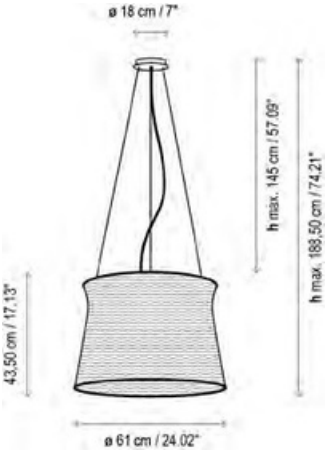

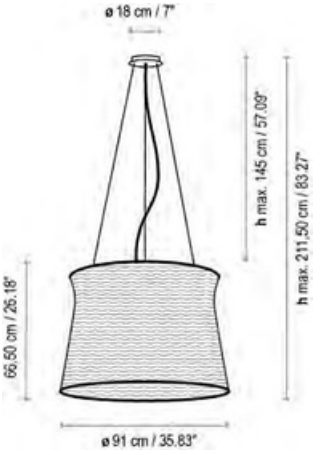

Syra 45 IP-66

DALI | 17,1 W LED / CRI: 90 / 2700ºK
2064 lm fuente de luz / *light source*

Syra 60 IP-66

DALI | 37,7 W LED / CRI: 90 / 2700ºK
4700 lm fuente de luz / *light source*

Syra 90 IP-66

DALI | 39,7 W LED / CRI: 90 / 2700ºK
5500 lm fuente de luz / *light source*

Only for North America

NOT AVAILABLE FOR NORTH AMERICA

Syra 60 WET

0-10V | 37,7 W LED / CRI: 90 / 2700ºK
4700 lm light source

Syra 90 WET

0-10V | 39,7 W LED / CRI: 90 / 2700ºK
5500 lm light source

Acabados / *Finishing*




Blanco Roto
Natural White



Marrón Grafito
Graphite Brown



Blanco Marfil
Ivory White



Marrón
Brown



Syra 90



Syra 45



Syra 45



Syra 45



Cornet B/52




Cornet B/52






Cornet B/27 IP-66

TRIAC 8 W LED / CRI: 90 / 2700ºK
860 lm fuente de luz / *light source*



Cornet B/52 IP-66

TRIAC 8 W LED / CRI: 90 / 2700ºK
860 lm fuente de luz / *light source*

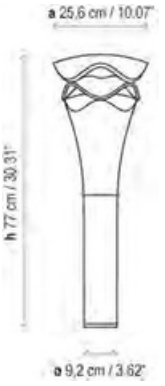

Cornet B/77 IP-66

TRIAC 8 W LED / CRI: 90 / 2700ºK
860 lm fuente de luz / *light source*

Only for North America

Atticus B/56 - B/66 WET

TRIAC 8 W LED / CRI: 90 / 2700ºK
860 lm light source

Atticus B/56 - B/66 WET

TRIAC 8 W LED / CRI: 90 / 2700ºK
860 lm light source

Atticus B/56 - B/66 WET


TRIAC 8 W LED / CRI: 90 / 2700ºK
860 lm light source



Cornet B/52 Outdoor



Cornet B/27

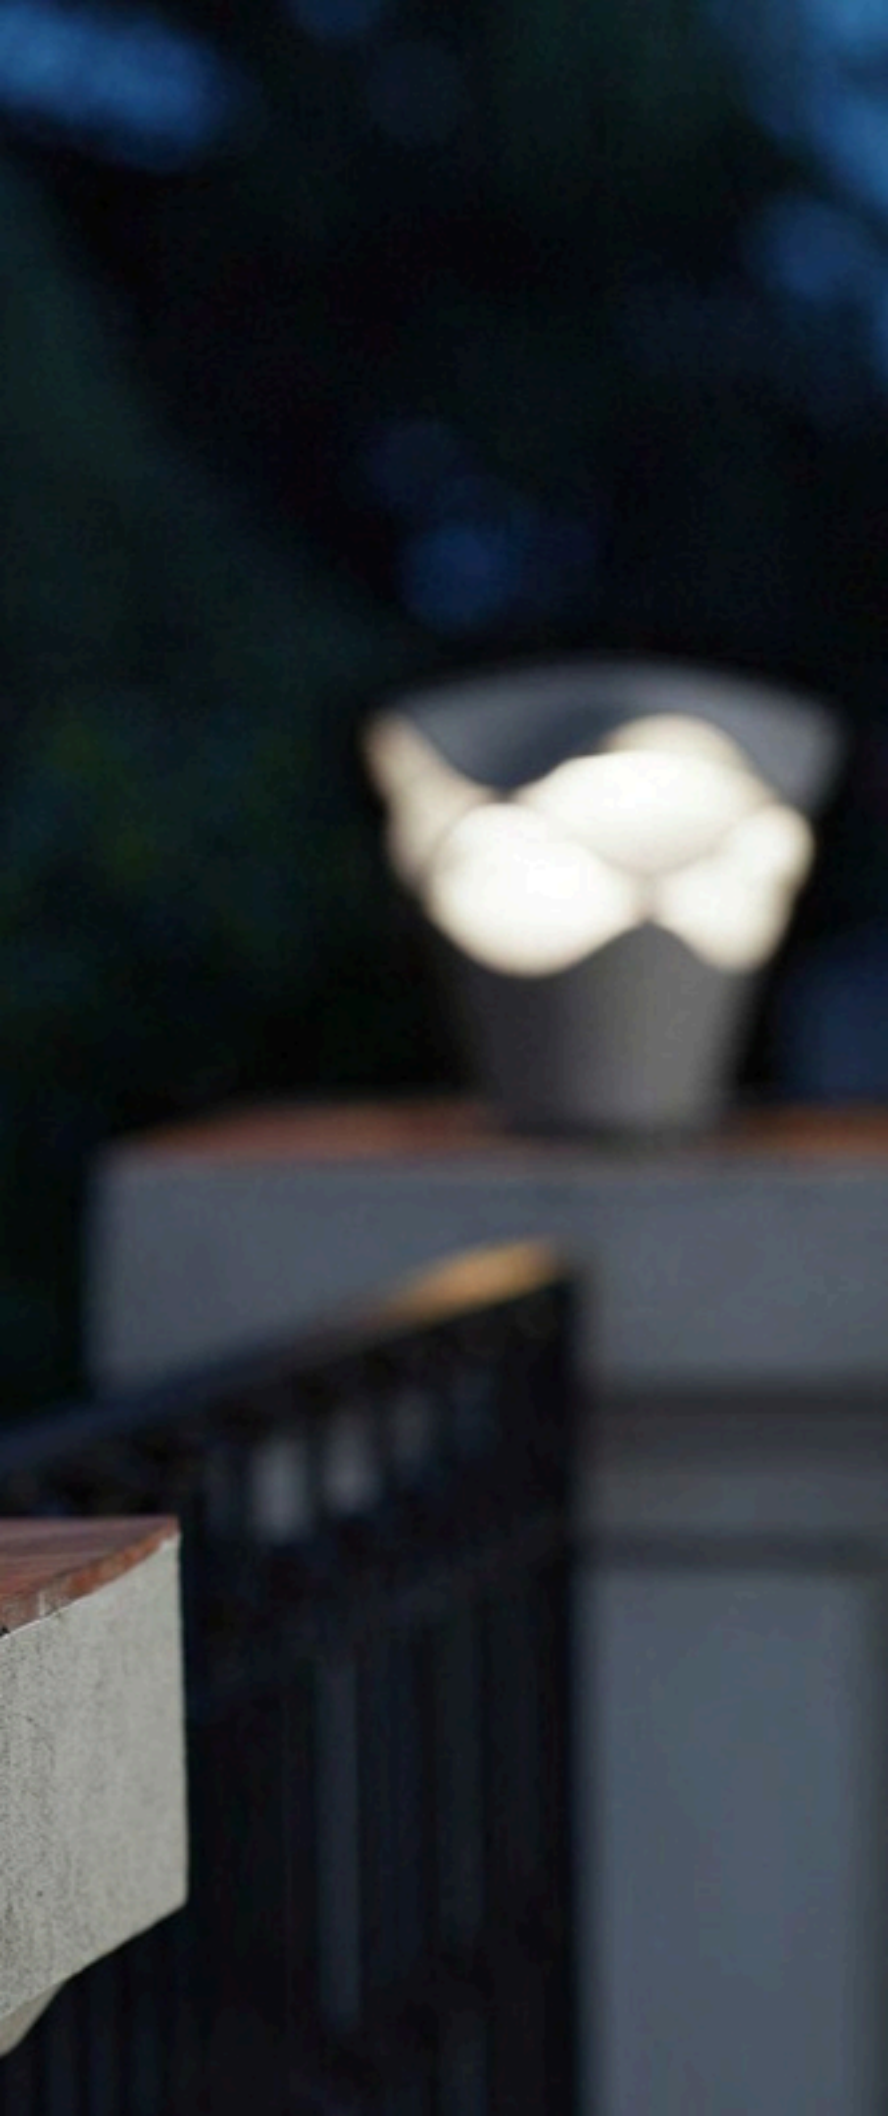




Moai B/60



Moai B/60



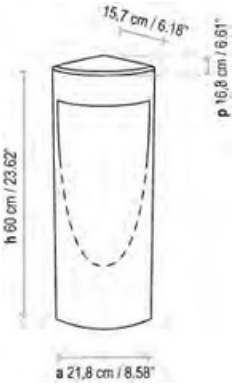

Moai B/35 IP66

TRIAC 6,5 W LED / CRI: 90 / 2700ºK
850 lm fuente de luz / *light source*

Moai B/60 IP66

TRIAC 6,5 W LED / CRI: 90 / 2700ºK
850 lm fuente de luz / *light source*

Only for North America

Moai B/35 WET

TRIAC 6,5 W LED / CRI: 90 / 2700ºK
850 lm light source

Moai B/60 WET

TRIAC 6,5 W LED / CRI: 90 / 2700ºK
850 lm light source

Moai es una lámpara de exterior donde hormigón, forma y luz trabajan juntas para dar protagonismo absoluto a esta sorprendente y novedosa unión.

Moai is an outdoor lamp where concrete, shape and light work together to highlight this surprising and innovative combination.

Finishing / *Acabados*

Cemento Gris
Grey Concrete



Moai B/35 | B/60





Tria 04 Outdoor




Tria 04 Outdoor



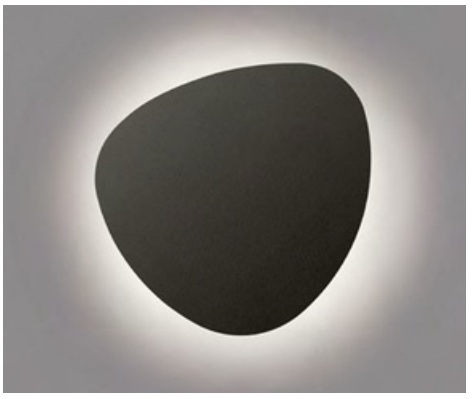





Tria 04 IP66

TRIAC 11,5 W LED / CRI: 90 / 2700ºK
1346 lm fuente de luz / *light source*

Trai 05 IP66

TRIAC 11,5 W LED / CRI: 90 / 2700ºK
1346 lm fuente de luz / *light source*

Only for North America

Tria 04 WET

TRIAC 11,5 W LED / CRI: 90 / 2700ºK
1346 lm light source

Tria 05 WET

TRIAC 11,5 W LED / CRI: 90 / 2700ºK
1346 lm light source

Acabados / *Finishing*

Frontal Metal Marrón Grafito
Graphite Brown Metal Frontal

Frontal Madera Teca
Teak Wood Frontal





Tria 04 Outdoor



Marietta S/32



Marietta S/32







Marietta S/32 IP-66

TRIAC | 8 W LED / CRI: 90 / 2700ºK
642 lm fuente de luz / *light source*

Only for North America

Marietta S/32 WET

TRIAC | 8 W LED / CRI: 90 / 2700ºK
622 lm light source

Image does not show north American backplate

Acabados / *Finishing*



Blanco
White




Marietta S/32



Maxi P/180


Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

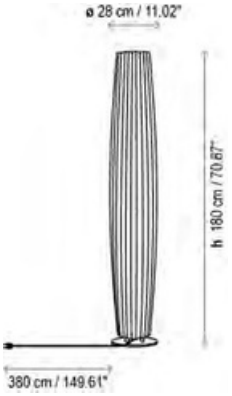

Opciones LED consultar dibujo técnico en la ficha técnica

LED options consult technical drawing in the cutsheet

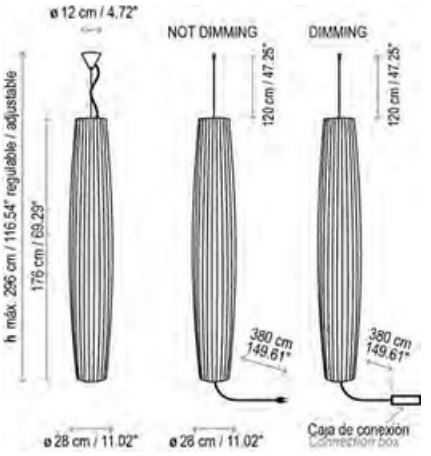

Maxi P/180 IP-66

2 x 28W T5 HE

49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

TRIAC | 49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

Maxi S/01 IP-66

2 x 28W T5 HE

49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

TRIAC | 49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

Only for North America

Maxi P/180 WET

2 x 54W Minibipin T5 L. Fluo

49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

0-10V | 49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

Maxi S/01 WET

2 x 54W Minibipin T5 L. Fluo

49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

0-10V | 49,2 W LED / CRI: 90 / 2700ºK
7500 lm fuente de luz / *light source*

Acabados / *Finishing*



Blanco
White



Maxi S/01