

AMEZEUS

CATALOGUE PRODUITS

ÉCLAIRAGE DE BUREAU ET ARCHITECTURAL

Luminaires pour bureaux et espaces intérieurs.
Éclairage fonctionnel et architectural.

Route de Taillepied 44
1095 Lutry, Suisse

direction@amezeus.com

+41 21 903 57 67
amezeus.com

PRODUCT CODE

SPECIFIC OFFICE LIGHTING

X XX X - XX XXX XX - X X

- **Project source**
  B: R&D design
- **Product Name**
  MR: MAYE-R
  EF: ELFOO
  WA: WASE
  And so on
- **Mounting Solution**
  F: Floor lamp
  J: Floor lamp(cut on the pole)
  D: Double-head floor lamp
  And so on
- **Product size**
  Linear lamp(By length)
  Round lamp(By diameter)
  Floor lamp(By height)
  12:The length is about 1.2 meters
  15:The length is about 1.5 meters
- **Total power**
  060 : 60W
  080 : 80W
- **Direct power**
  20 : 20W
  30 : 30W
- **CCT Dimmable**
  (Free standing luminaires)
  B: Basic Function
  C: CCT Change
- **Dimmable function**
  (Other types of luminaires)
  N: On/Off
  D: Dali Dimming
  V: 1-10V/PWM Dimming
  T: Triac Dimming
  W: Wireless
- **Sensor**
  N: On/Off
  M: Motion Sensor
  D: Daylight Sensor
  E: Emergency

ARCHITECTURE GARDEN LIGHTING

X X XX X - XX X XX - X X

- **Project source**
  B: R&D design
- **Installation**
  Bollards
  Flood lights
  Wall luminaires
  And so on
- **Product Name**
  BR: Bole-R
  TR: TIS-R
  NT: Nature-T
  And so on
- **Serial code**
- **Luminaire Wattage**
  05 : 5W
  10 : 10W
  20 : 20W
  And so on
- **CCT**
  0 : Tunable white
  1 : 2500K
  2 : 2700K
  3 : 3000K
  4 : 3500K
  5 : 4000K
  6 : 4500K
  7 : 5000K
  8 : >5000K
  9 : Color
- **Beam Angle**
  1 : 5°~10°
  2 : 11°~20°
  3 : 21°~30°
  4 : 31°~40°
  5 : 41°~60°
  6 : 61°~90°
  7 : 91°~120°
  8 : > 120°
  0 : non-luminous
- **Dimmable function**
  (Other types of luminaires)
  N: On/Off
  D: Dali Dimming
  V: 1-10V/PWM Dimming
  T: Touch Dimming
  W: Wireless
- **Sensor**
  N: On/Off
  M: Motion Sensor
  D: Daylight Sensor

CONTENTS

01 **SPECIFIC OFFICE LIGHTING** ---- **17**

FREE STANDING LUMINAIRES ---- 19

DESK FIXED LUMINAIRES ---- 85

PENDANT LUMINAIRES ---- 103

SURFACE MOUNTED LUMINAIRES ---- 135

RECESSED LUMINAIRES ---- 153

WALL MOUNTED LUMINAIRES ---- 173

02 **ARCHITECTURE GARDEN LIGHTING** ---- **183**

BOLLARDS ---- 185

FLOODLIGHTS ---- 207

WALL LUMINAIRES ---- 215

CEILING LUMINAIRES ---- 231

WALL RECESSED LUMINAIRES ---- 237

TABLE LAMPS ---- 245

SPECIFIC OFFICE LIGHTING

01 FREE STANDING LUMINAIRES



Dawn-F 29 Dawn-D 31 NOVA-F1 33 NOVA-D1 35 NEAT-F 37 POLA 39 BOOK-F 41 FIT-F 43



ROMAN-F0 45 ROMAN-F1 47 ROMAN-F2 49 ROMAN-D1 51 FREE-F 53 FREE-D1 55 FREE-D2 57 ROMI-F 59



COFFEE-R 61 OFA 63 ELFOO-F 2.0 65 ELFOO-D 67 LENO-F 2.0 69 MAYE-FR 2.0 71 MAYE-FS 2.0 73 HOMEC 3.0 75




HOMEO 3.0 77 NITEC 3.0 79 NITED 81 NITEO 3.0 83

02 DESK FIXED LUMINAIRES



FIT-T 89 MAYE-TR 2.0 91 MAYE-TS 2.0 93 HOMET 3.0 95 NITET 3.0 97 ELFOO-T 2.0 99 LENO-T 2.0 101

03 PENDANT LUMINAIRES

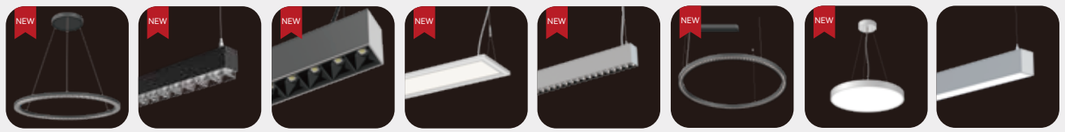

Dawn-P0 109 Dawn-P1 111 Equo-P 113 MAYE Pro-PS 115 ROMAN-P0 117 ROMAN-P1 119 EZY-P 121 KEY-P 123



FREE-P 125 ROMI-P 127 ELFOO-P 129 LENO-P2 131 LICON-P 133

04 SURFACE MOUNTED LUMINAIRES



EZY-C 139 KEY-C 141 FREE-C 143 ROMI-C 145 ELFOO-C 147 ELFOO-C3 149 LICON-C 151

05 RECESSED LUMINAIRES



EZY-R 157 KEY-R 159 ELFOO-R0 161 ELFOO-R1 163 ELFOO-D2 165 ELFOO-D3 167 ELFOO-D4 169 ELFOO-D5 171

06 WALL MOUNTED LUMINAIRES



MAYE-WS 2.0 177 POD 179 NEWA 181

ARCHITECTURE GARDEN LIGHTING

01 BOLLARDS




SHOW-L 189 PEGO 191 BUTTON-L 193 BOLE-M 195 BOLE-R 197 BOLE-S 201 BOLE-U 205

02 FLOODLIGHTS



CICA-X 211 CICA-M 211 CICA-S 213 CICA-T 213

03 WALL LUMINAIRES

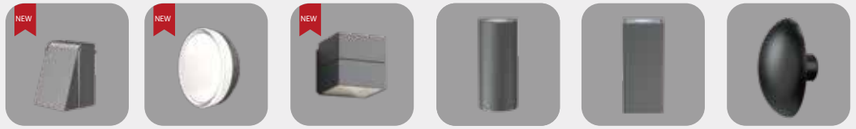

PEGO 219 LUNA 221 CUBE 223 TIE-R 225 TIE-S 227 NATURE-W 229

04 CEILING LUMINAIRES



HALO-1 235 HALO-0 235

05 WALL RECESSED LUMINAIRES



SAFE-S 241 SAFE-O 243

06 TABLE LAMPS



PUDDING 249 NATURE-T 251



SPECIFIC OFFICE LIGHTING

01.

FREE STANDING LUMINAIRES - - - - - - - - - - - - - - - - 19

DESK FIXED LUMINAIRES - - - - - - - - - - - - - - - - - - 85

PENDANT LUMINAIRES - - - - - - - - - - - - - - - - - - - 103

SURFACE MOUNTED LUMINAIRES - - - - - - - - - - - - - 135

RECESSED LUMINAIRES - - - - - - - - - - - - - - - - - - 153

WALL MOUNTED LUMINAIRES - - - - - - - - - - - - - - - 173

01

FREE STANDING LUMINAIRES

APPLICATIONS:
Open-plan office, individual office, etc.



FREE STANDING LUMINAIRES



Dawn-F



Dawn-D



Nova-F1



Nova-D1



NEAT-F



POLA



Book-F

Luminaire Wattage	80W/ 100W	160W/ 200W	80W/ 100W/ 90W (Casambi)	160W/ 200W	60W	80W/ 100W	60W
Luminous Flux	12000lm/ 15000lm	24000lm/ 29000lm	11200lm/ 14000lm/ 11200lm	23200lm/ 29000lm	7500lm	11200lm/ 14500lm	7800lm
UGR	<13	<13	<14	<12	<18	<15	C0 <17
optics	↑155° / 70°↓	↑155° / 70°↓	Asymmetric optics	Asymmetric optics	↑115° / 80°↓	↑115° / 80°↓	↑100° / 82°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor/ Casambi	Daylight sensor & Motion sensor	NO	Daylight sensor & Motion sensor	Motion sensor
Colours							

FREE STANDING LUMINAIRES



FIT-F



ROMAN-F0



ROMAN-F1



ROMAN-F2



ROMAN-D1



FREE-F



FREE-D1

Luminaire Wattage	60W	60W/ 80W/ 100W	80W	80W	150W	80W/ 100W	150W
Luminous Flux	5530lm	9000lm/ 12000lm/ 15000lm	11800lm	12000lm	20200lm	10400lm/ 13300lm	19800lm
UGR	<18	<6	<11	<11	<16	<14	<16
optics	↑100°/70°↓	↑115° / 60°↓	↑115° / 60°↓	↑115° / 60°↓	↑115° / 60°↓	↑115° / 80°↓	↑115° / 80°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming
Sensor	Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor/ Casambi	Daylight sensor & Motion sensor
Colours							

FREE STANDING LUMINAIRES



FREE-D2



ROMI-F



COFFEE-R



OFA



ELFOO-F 2.0



ELFOO-D 2.0



LENO-F 2.0

Luminaire Wattage	150W	80W	45W	100W	80W	150W	80W
Luminous Flux	19800lm	9645lm	6400lm	12000lm	10800lm	19500lm	11600lm
UGR	<16	<16	<10	<14	<12	<12	<6
optics	↑115° / 80°↓	↑115° / 90°↓	↑115°	↑140° / 85°↓	↑155° / 75°↓or ↑155° / 50°↓	↑155° / 75°↓or ↑155° / 50°↓	↑115° / 50°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming
Sensor	Daylight sensor & Motion sensor	NO	NO	Daylight sensor/ Motion sensor	Daylight sensor/ Motion sensor Casambi	Daylight sensor & Motion sensor	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor
Colours							

FREE STANDING LUMINAIRES



MAYE-FR 2.0



MAYE-FS 2.0



HOMEC 3.0



HOMEO 3.0



NITEC 3.0




NITED



NITEC 3.0

Luminaire Wattage	80W/ 100W	80W/ 100W	60W/ 80W	60W/ 80W	60W/ 80W	160W	60W/ 80W
Luminous Flux	11200lm/ 11516lm/ 15000lm	11200lm/ 11516lm/ 15000lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	19200lm	7730lm/ 10800lm/ 11600lm
UGR	<18/ <14/ <13	<18/ <14/ <13	<16/ <19/ <11	<16/ <19/ <11	<16/ <19/ <11	<17	<16/ <19/ <11
optics	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Knob dimming	Knob dimming	Knob dimming	Knob dimming
Sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor
Colours							



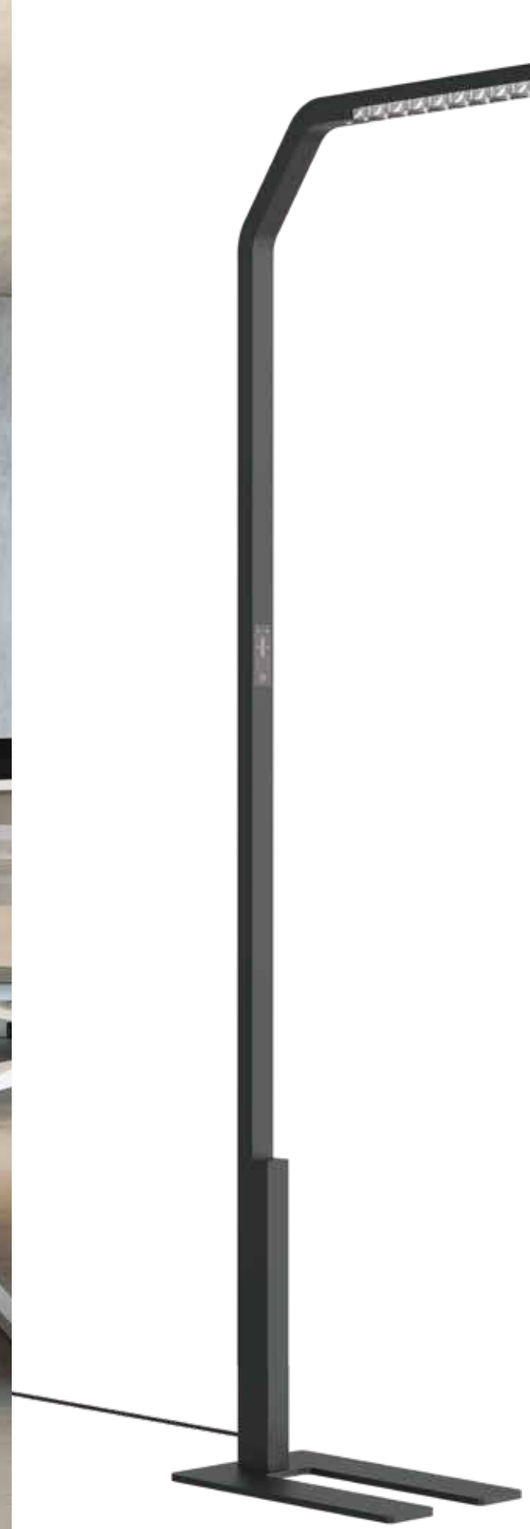

Dawn-F

NEW

APPLICATIONS:
Open-plan office, individual office, etc.


IP20 | <14 UGR | Dimmable | Tunable White | HCL system | CAS AMBI | SWARM | CE | RoHS



Anti glare lens solution with side micro-light, low glare and high visual comfort



120° wide beam angle lens for indirect light



4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;


PRODUCT PARAMETERS


Luminaire Wattage	80W	100W
Luminous Flux	11040lm	13800lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Beam Angle	↑120° / 70°↓	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL


Part No.	LM	Power	CCT
BDAF-2008020-BD	↑8640lm/2400lm↓	↑60W/20W↓	3000/4000/6000K
BDAF-2008020-CD	↑8100lm/2300lm↓	↑60W/20W↓	3000~5700K
BDAF-2010020-BD	↑11400lm/2400lm↓	↑80W/20W↓	3000/4000/6000K
BDAF-2010020-CD	↑10700lm/2300lm↓	↑80W/20W↓	3000~5700K

SIZE







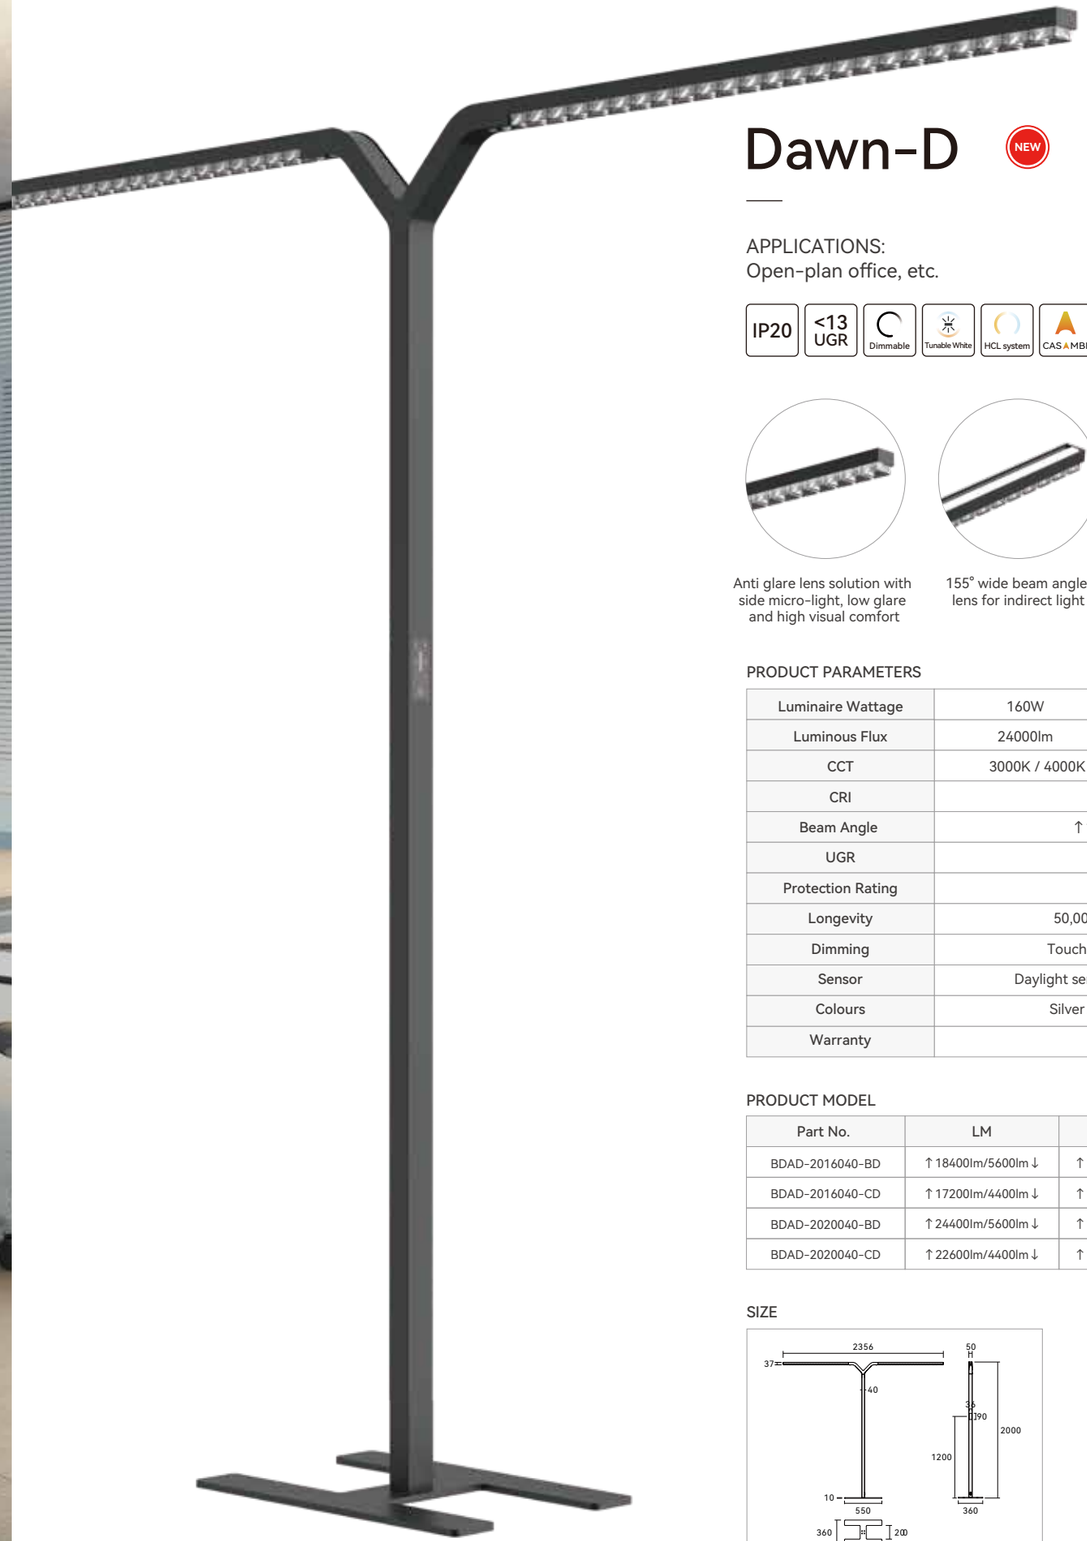

Dawn-D


NEW

APPLICATIONS:
Open-plan office, etc.

IP20 | <13 UGR | Dimmable | Tunable White | HCL system | CASAMBI | swarm | CE | RoHS

Anti glare lens solution with side micro-light, low glare and high visual comfort

155° wide beam angle lens for indirect light



4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;

PRODUCT PARAMETERS

Luminaire Wattage	160W	200W
Luminous Flux	24000lm	30000lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Beam Angle	↑155° / 70°↓	
UGR	<13	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	CCT
BDAD-2016040-BD	↑18400lm/5600lm↓	↑120W/40W↓	3000/4000/6000K
BDAD-2016040-CD	↑17200lm/4400lm↓	↑120W/40W↓	3000~5700K
BDAD-2020040-BD	↑24400lm/5600lm↓	↑160W/40W↓	3000/4000/6000K
BDAD-2020040-CD	↑22600lm/4400lm↓	↑160W/40W↓	3000~5700K

SIZE





Casambi smart module
enables app control
with Swarm, HCL

NOVA-F1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <14 UGR | Dimmable | Tunable White | HCL system | CASAMBI | swarm | CE | RoHS



Asymmetric optics
Desktop uniformity
U0 >0.75



Integrated die-cast and 23mm
ultra-thin lamp head, good
heat dissipation performance



Daylight sensor &
Presence sensor


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W	90W (Casambi)
Luminous Flux	11200lm	14000lm	11200lm
CCT	3000K / 4000K / 6000K / Tunable white		
CRI	>80		
Optic	Asymmetric optics		
UGR	<14		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor & Motion sensor/Presence sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNOF1-2008012-BD	↑9580lm/1620lm↓	↑68W/12W↓	3000/4000/6000K
BNOF1-2008012-CD	↑8900lm/1500lm↓	↑68W/12W↓	3000~5700K
BNOF1-2010012-BD	↑12380lm/1620lm↓	↑88W/12W↓	3000/4000/6000K
BNOF1-2010012-CD	↑11500lm/1500lm↓	↑88W/12W↓	3000~5700K
BNOF1-2009012-CC	↑9828lm/1372lm↓	↑78W/12W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION





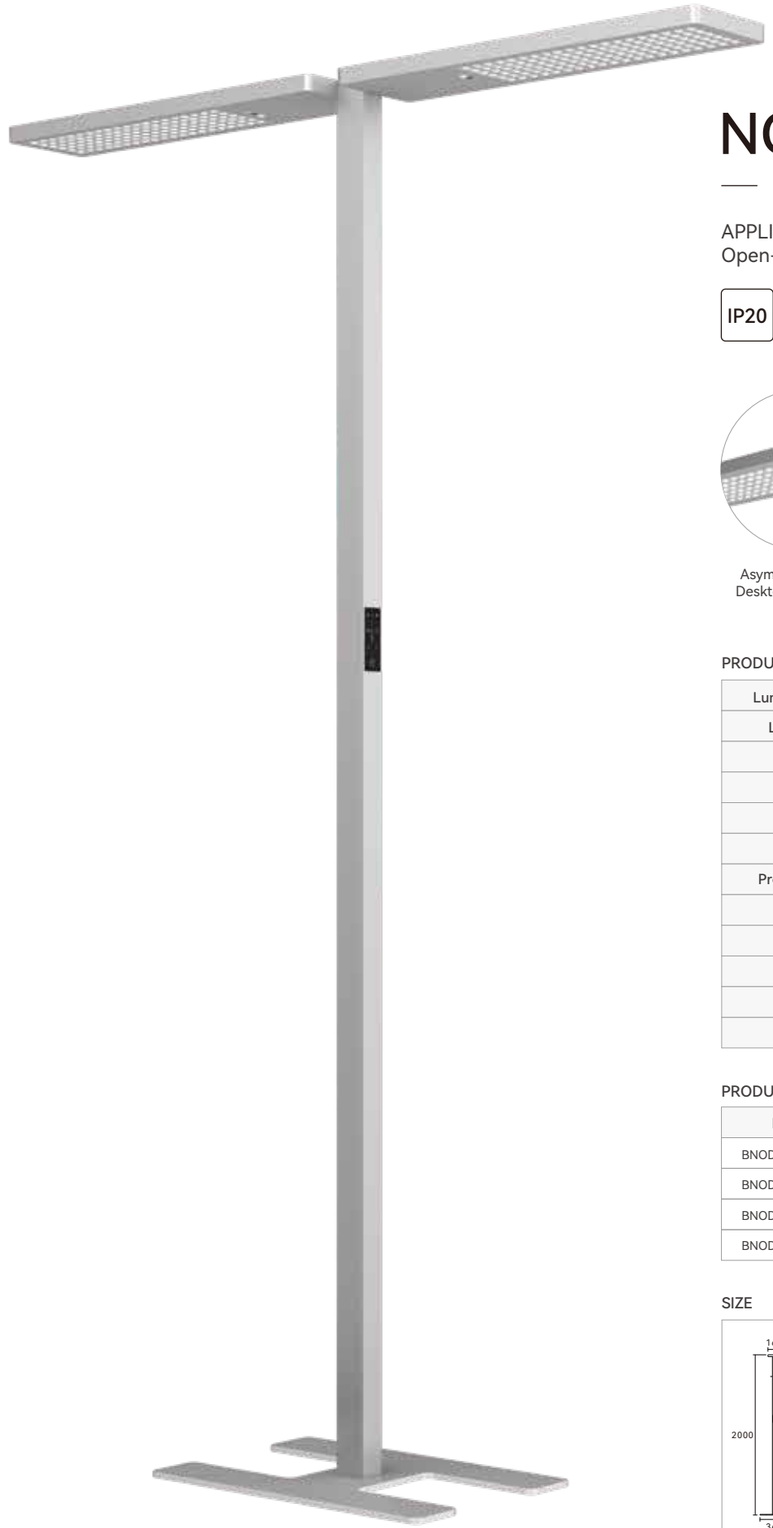

NOVA-D1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <12 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS



Asymmetric optics
Desktop uniformity
U0 >0.6



Integrated die-cast and 23mm ultra-thin lamp head, good heat dissipation performance



Daylight sensor & Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	160W	200W
Luminous Flux	23200lm	29000lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
Optic	Asymmetric optics	
UGR	<12	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor & Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BNOD1-2016024-BD	↑20300lm/2900lm↓	↑136W/24W↓	3000/4000/6000K
BNOD1-2016024-CD	↑18900lm/2700lm↓	↑136W/24W↓	3000~5700K
BNOD1-2020024-BD	↑26100lm/2900lm↓	↑176W/24W↓	3000/4000/6000K
BNOD1-2020024-CD	↑24300lm/2700lm↓	↑176W/24W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION





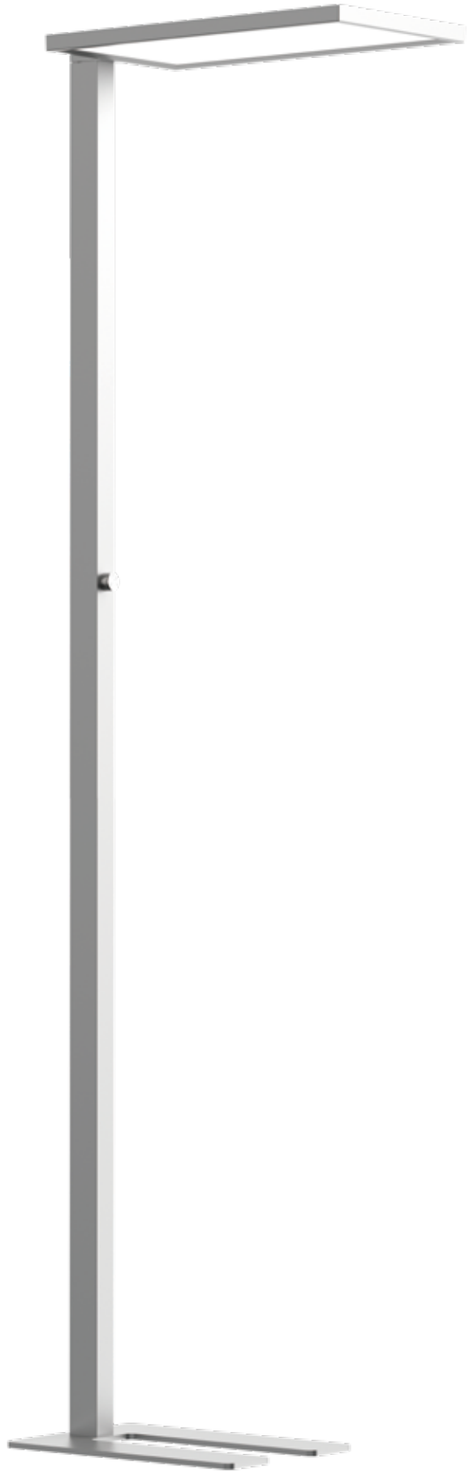

NEAT-F

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | CE | RoHS



Integrated die-cast and 22mm ultra-thin lamp head



Competitive price



Microprismatic diffuser design with low glare


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7500lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	↑115° / 80°↓
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	NO
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BNEJ-1906030-BN	↑4200lm/3300lm↓	↑30W/30W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION



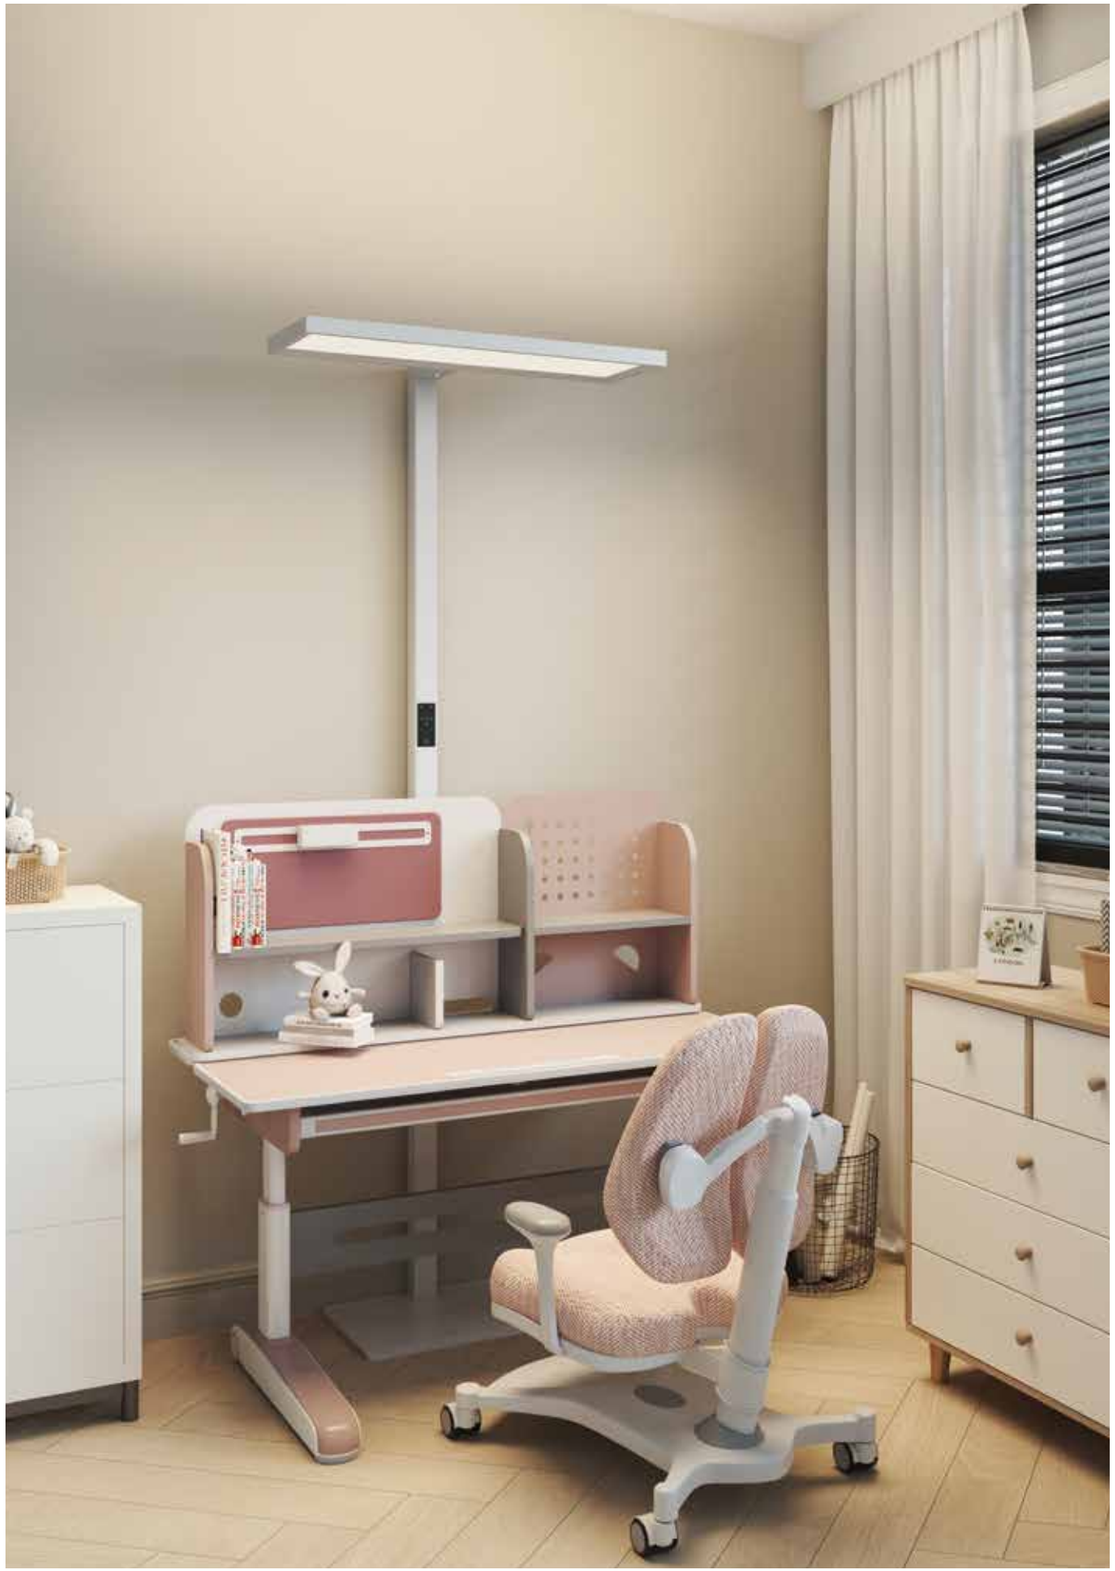




POLA NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <15 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS



Desktop light uniformity U0> 0.6



Indirect lighting with tilted asymmetric design for visual comfort




Kick-resistant base design

Luminaire Wattage	80W	100W
Luminous Flux	11200lm	14500lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BPOF-1908024-BD-01	↑8400lm/2800lm↓	↑56W/24W↓	3000/4000/6000K
BPOF-1908024-BN-01	↑8400lm/2800lm↓	↑56W/24W↓	3000/4000/6000K
BPOF-1908024-CD-01	↑8000lm/2400lm↓	↑56W/24W↓	3000~5700K
BPOF-1908024-CN-01	↑8000lm/2400lm↓	↑56W/24W↓	3000~5700K
BPOF-1910020-BD-01	↑12000lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BPOF-1910020-BN-01	↑12000lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BPOF-1910020-CD-01	↑11100lm/2400lm↓	↑80W/20W↓	3000~5700K
BPOF-1910020-CN-01	↑11100lm/2400lm↓	↑80W/20W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION








BOOK-F


NEW

APPLICATIONS:
Home office, study room, children's study area, etc.


IP20 | Dimmable | CE | RoHS



Designed with large shielding angle



Light efficiency up to 130LM/W



Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	60W
Luminous Flux	7800lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	C0 <17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Motion sensor
Colours	Silver / White / Black / Madeira brown / Blackberry leaf green / Hermosa pink / Spruce blue
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BBKJ-1806020-BN-01	↑6000lm/1800lm↓	↑40W/20W↓	3000/4000/6000K
BBKJ-1806020-BM-01	↑6000lm/1800lm↓	↑40W/20W↓	3000/4000/6000K


SIZE



LIGHT DISTRIBUTION



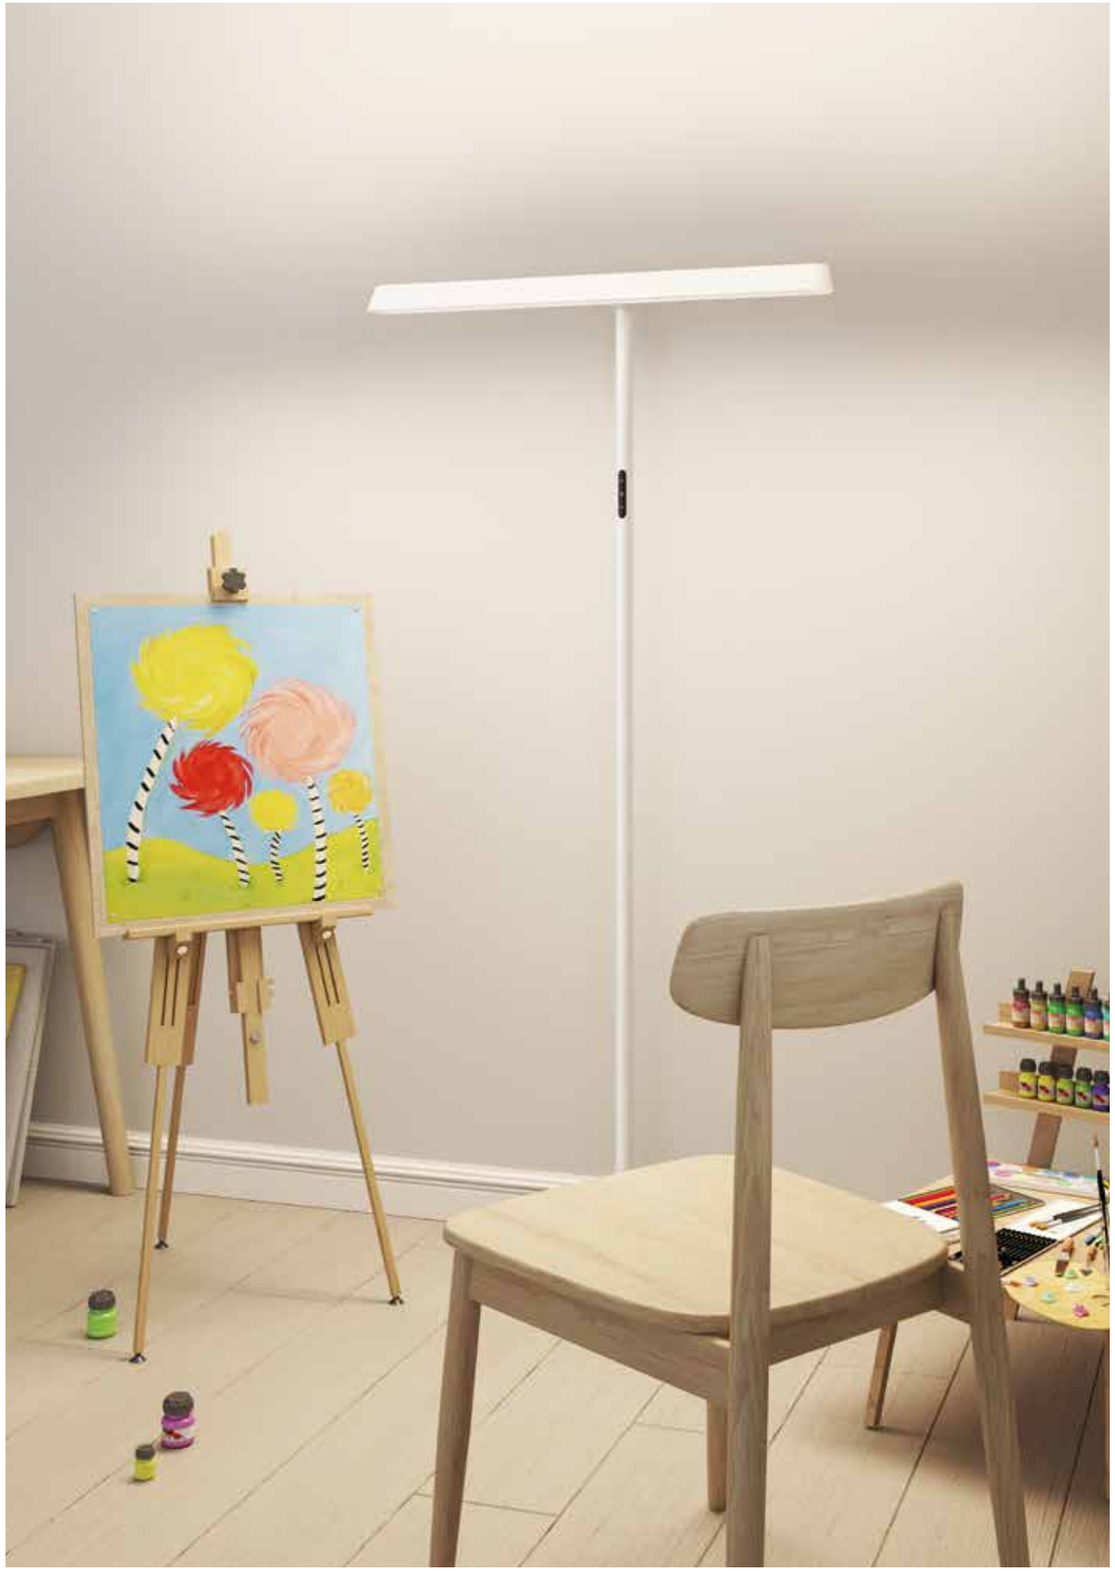

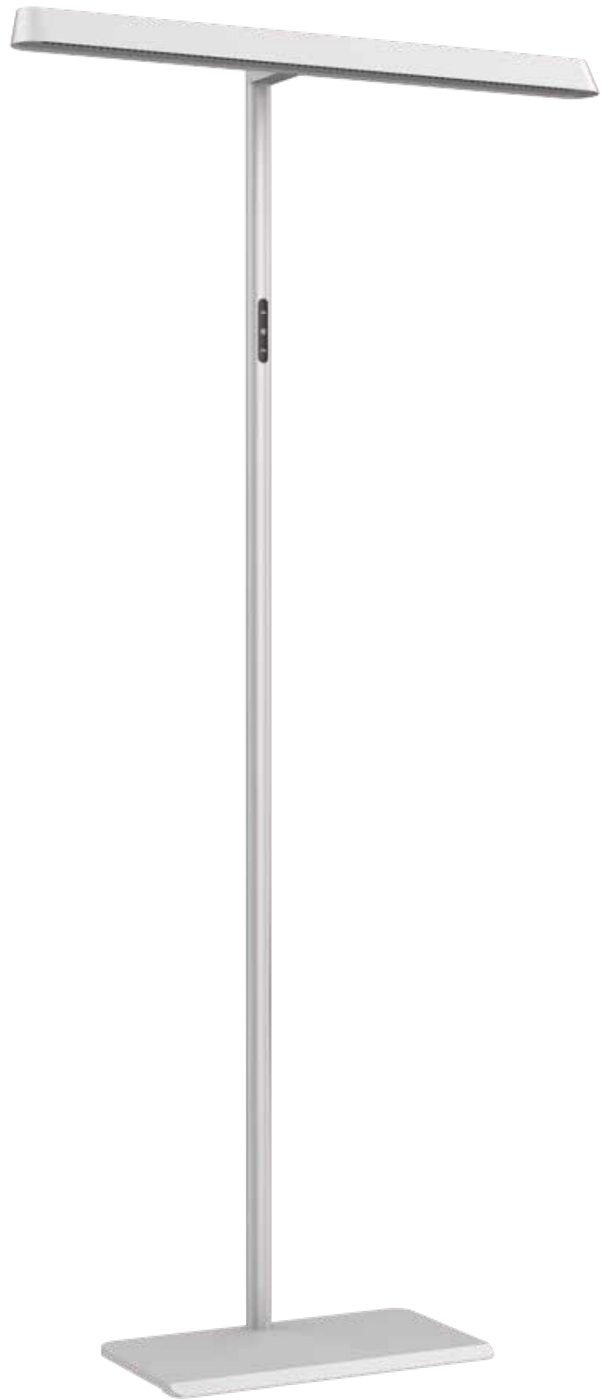

FIT-F NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | CE | RoHS



Direct and indirect light, with full-reflective polarized optic solution, UGR<18 anti-glare design;



78cm lamp head design, delivers superior workplane illuminance uniformity;




Independent touch panel dimming control for direct and indirect light, smooth and comfortable;

Luminaire Wattage	60W	
Luminous Flux	5530lm	
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	NO	Motion sensor
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFAJ-1606030-BN-02	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K
BFAJ-1606030-BM-02	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION







ROMAN-F0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.






Large angle cut-off, effective control of light glare Anti-glare modules



Touch panel dimming



Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	100W
Luminous Flux	9000lm	12000lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
CRI	>80		
Beam Angle	↑115° / 60°↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BROF0-1906018-BN	↑6840lm/2160lm↓	↑42W/18W↓	3000/4000/6000K
BROF0-1906018-BM	↑6840lm/2160lm↓	↑42W/18W↓	3000/4000/6000K
BROF0-1906018-BD	↑6840lm/2160lm↓	↑42W/18W↓	3000/4000/6000K
BROF0-1908016-BN	↑10080lm/1920lm↓	↑64W/16W↓	3000/4000/6000K
BROF0-1908016-BM	↑10080lm/1920lm↓	↑64W/16W↓	3000/4000/6000K
BROF0-1908016-BD	↑10080lm/1920lm↓	↑64W/16W↓	3000/4000/6000K
BROF0-1908016-CD	↑8800lm/1600lm↓	↑64W/16W↓	3000~5700K
BROF0-1910015-BD	↑13200lm/1800lm↓	↑85W/15W↓	3000/4000/6000K
BROF0-1910015-CD	↑11500lm/1500lm↓	↑85W/15W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION



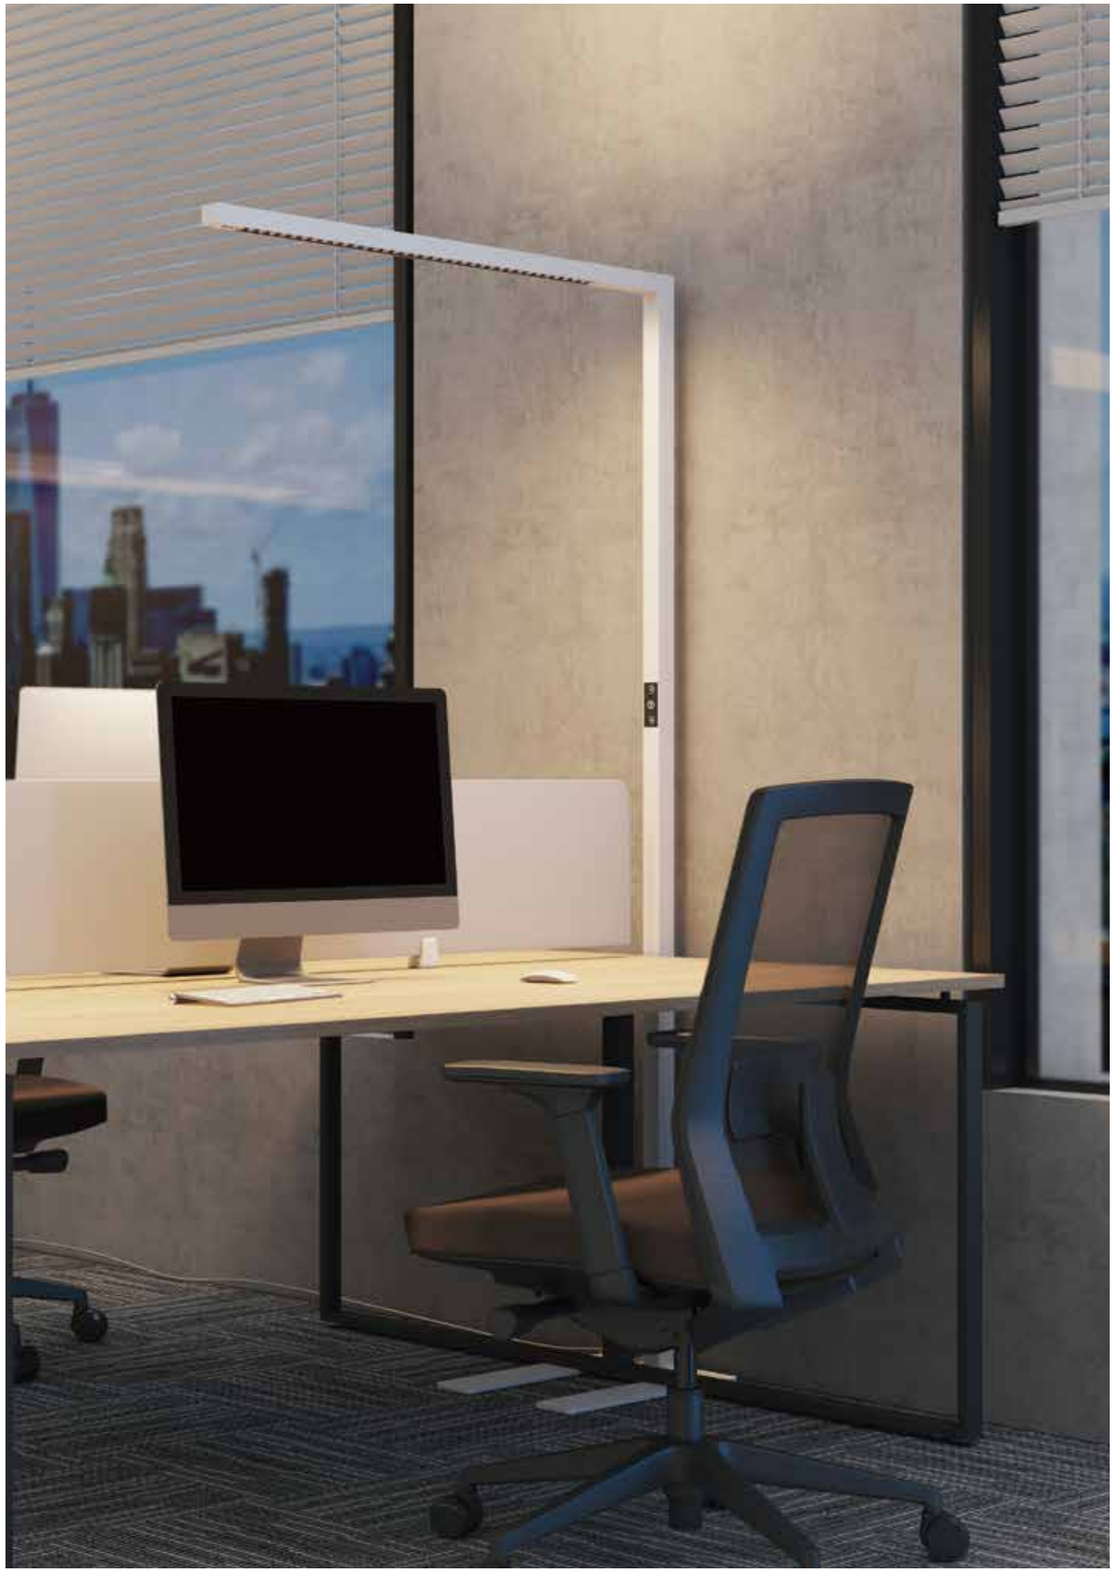



ROMAN-F1 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <11 UGR | Dimmable | Tunable White | CE | RC146



Large angle cut-off, effective control of light glare Anti-glare modules



Light efficiency up to 148LM/W



Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	11800lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑115° / 60°↓
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BROF1-1908020-BD	↑9350lm/2450lm↓	↑60W/20W↓	3000/4000/6000K
BROF1-1908020-CD	↑8800lm/2000lm↓	↑60W/20W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION







ROMAN-F2 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <11 UGR | Dimmable | Tunable White | CE | RoHS



Large angle cut-off, effective control of light glare Anti-glare modules



Light efficiency up to 150LM/W



Support smart control function


PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	12000lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑115° / 60°↓
UGR	<11
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BROF2-1908020-BD	↑9500lm/2500lm↓	↑60W/20W↓	3000/4000/6000K
BROF2-1908020-CD	↑8800lm/2200lm↓	↑60W/20W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION





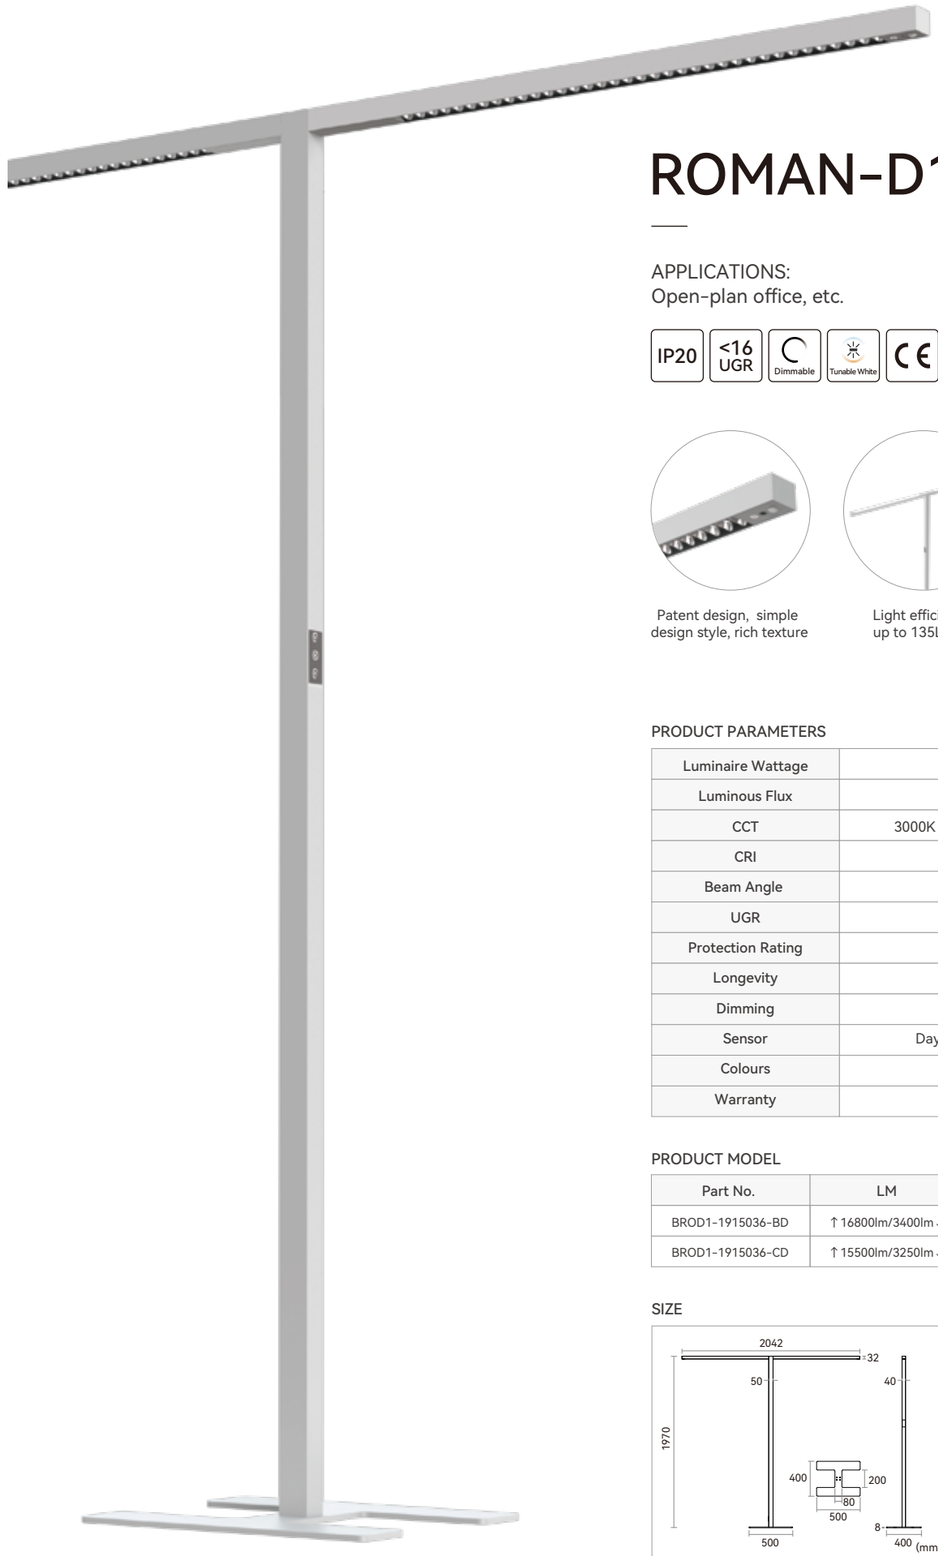

ROMAN-D1 NEW

APPLICATIONS:
Open-plan office, etc.

IP20 | <16 UGR | Dimmable | Tunable White | CE | RG148

Patent design, simple design style, rich texture

Light efficiency up to 135LM/W



Support smart control function

PRODUCT PARAMETERS


Luminaire Wattage	150W
Luminous Flux	20200lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑115° / 60°↓
UGR	<16
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL

Part No.	LM	Power	CCT
BROD1-1915036-BD	↑16800lm/3400lm↓	↑114W/36W↓	3000/4000/6000K
BROD1-1915036-CD	↑15500lm/3250lm↓	↑114W/36W↓	3000~5700K


SIZE

LIGHT DISTRIBUTION







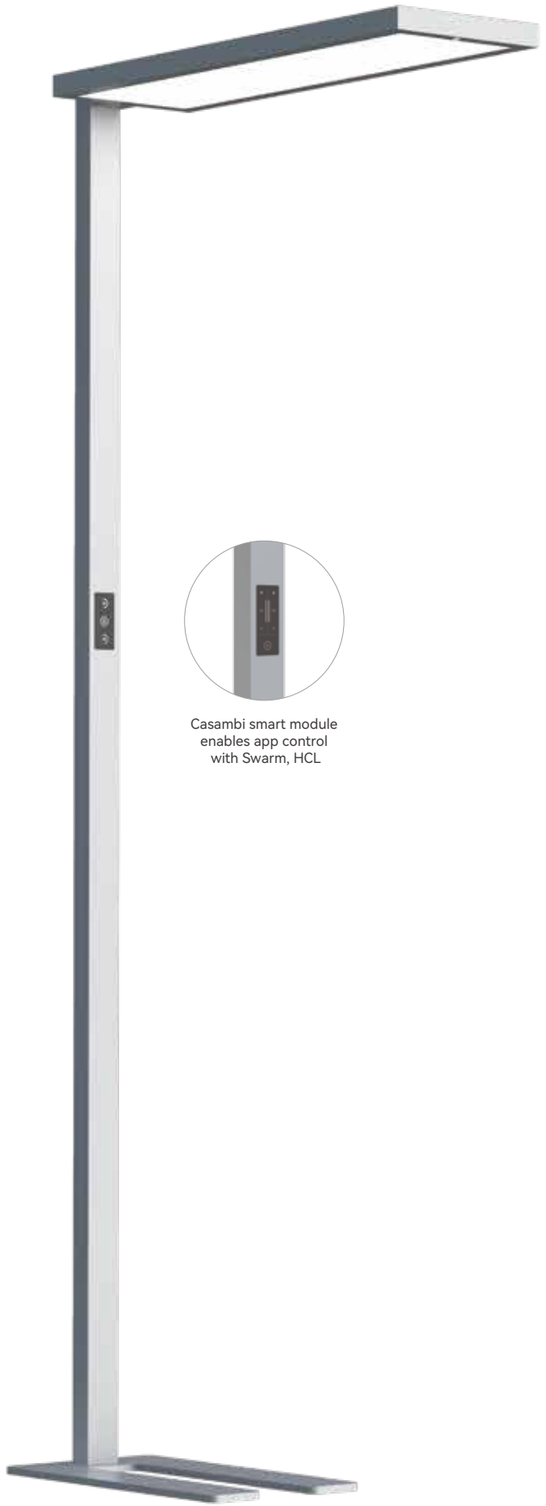

Casambi smart module
enables app control
with Swarm, HCL

FREE-F

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <14 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS



Patent design, simple
design style, rich texture



Light efficiency
up to 135LM/W



Casambi smart module
enables app control
with Swarm, HCL


PRODUCT PARAMETERS

Luminaire Wattage	80W	100W
Luminous Flux	10400lm	13300lm
CCT	3000K / 4000K / 6000K / Tunable white	
CRI	>80	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFRF-1908024-BN	↑7280lm/3120lm↓	↑56W/24W↓	3000/4000/6000K
BFRF-1908024-BD	↑7280lm/3120lm↓	↑56W/24W↓	3000/4000/6000K
BFRF-1910020-BN	↑10500lm/2800lm↓	↑80W/20W↓	3000/4000/6000K
BFRF-1910020-BD	↑10500lm/2800lm↓	↑80W/20W↓	3000/4000/6000K
BFRF-1910020-CD	↑10500lm/1900lm↓	↑80W/20W↓	3000~5700K
BFRF-1910020-CC	↑10500lm/1900lm↓	↑80W/20W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION









FREE-D1

APPLICATIONS:
Open-plan office, individual office, etc.



Patent design, simple design style, rich texture



Light efficiency up to 132LM/W



Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	150W	
Luminous Flux	19800lm	19000lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFRD-2015045-BD-01	↑15250lm/4550lm↓	↑105W/45W↓	3000/4000/6000K
BFRD-2015045-CD-01	↑14800lm/4200lm↓	↑105W/45W↓	3000~5700K

SIZE




LIGHT DISTRIBUTION







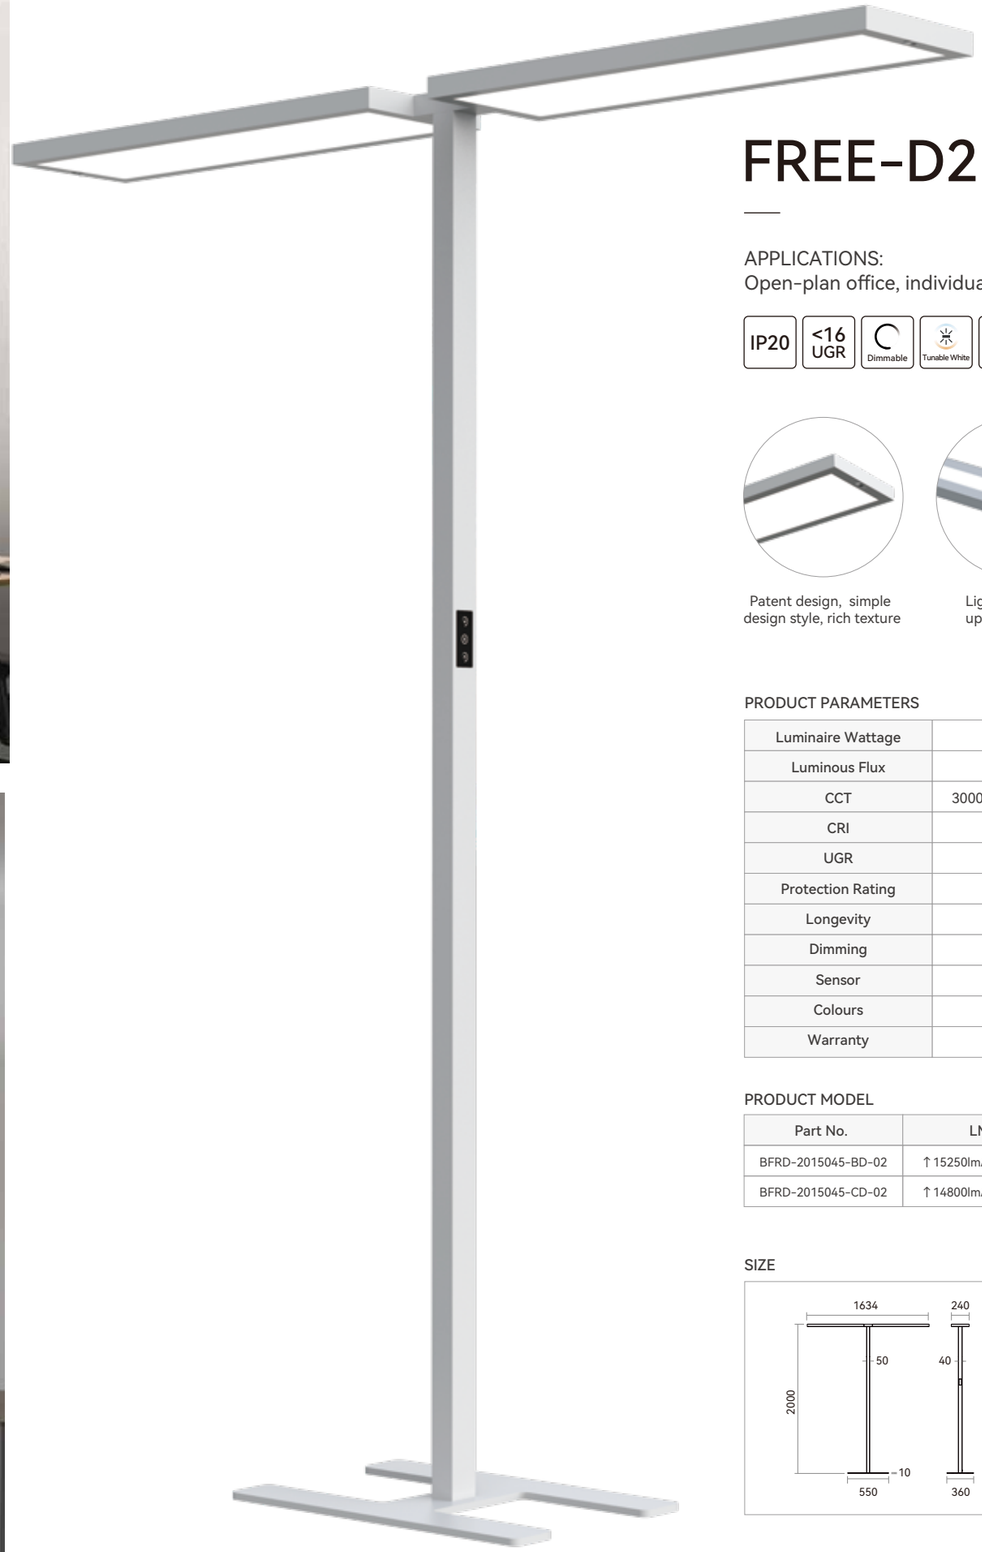


FREE-D2

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <16 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS

Patent design, simple design style, rich texture



Light efficiency up to 132LM/W



Direct and indirect light control individually

PRODUCT PARAMETERS


Luminaire Wattage	150W	
Luminous Flux	19800lm	19000lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	CCT
BFRD-2015045-BD-02	↑15250lm/4550lm↓	↑105W/45W↓	3000/4000/6000K
BFRD-2015045-CD-02	↑14800lm/4200lm↓	↑105W/45W↓	3000~5700K

SIZE

LIGHT DISTRIBUTION









ROMI-F

APPLICATIONS:
Open-plan office, individual office, etc.



Microprism diffuser
UGR<16



Lumen efficiency
up to 120LM/W

Touch panel dimming


PRODUCT PARAMETERS

Luminaire Wattage	80W	
Luminous Flux	9645lm	9122lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BROF-1908040-BN	↑6105lm/3540lm↓	↑40W/40W↓	3000/4000/6000K
BROF-1908040-CN	↑5750lm/3372lm↓	↑40W/40W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION










COFFEE-R NEW

APPLICATIONS:
Negotiation rooms, small meeting rooms,
breakout areas and other office areas.
Living room, bedrooms and study rooms.

IP20 | <10 UGR | Dimmable | Tunable White | TUYA | CE | ROHS



95% Indirect light,
lumen efficiency
up to 135LM/W



Convenient installation



Cut-Off Pole (Optional)


PRODUCT PARAMETERS

Luminaire Wattage	45W	
Luminous Flux	6400lm	5850lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming / Bluetooth dimming (TUYA)(optional)	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BCRJ-1904500-BN-03	↑6400lm	↑45W	3000/4000/6000K
BCRJ-1904500-CN-03	↑5850lm	↑45W	3000~5700K
BCRJ-1904500-WN-03	↑6400lm	↑45W	3000/4000/6000K


SIZE



LIGHT DISTRIBUTION





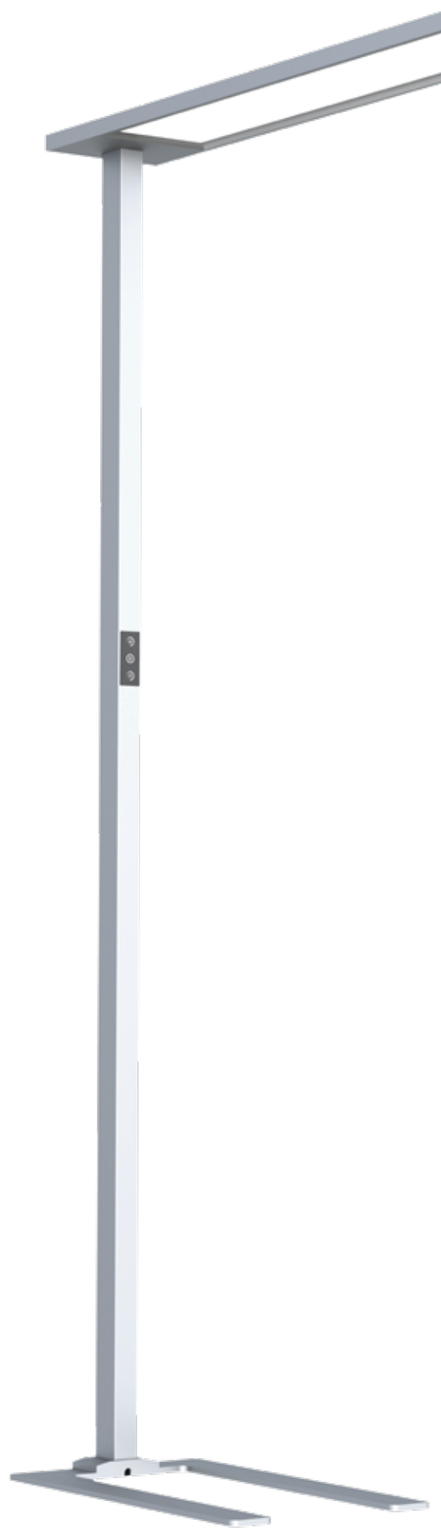


OFA

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <14 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS



Microprism diffuser
UGR<14



140° Indirect light,
provide comfortable
light to space



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	100W	
Luminous Flux	12000lm	10500lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
UGR	<14	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BOFF-1910025-BD	↑9500lm/2500lm↓	↑75W/25W↓	3000/4000/6000K
BOFF-1910025-CD	↑8250lm/2250lm↓	↑75W/25W↓	3000~5700K

SIZE




LIGHT DISTRIBUTION







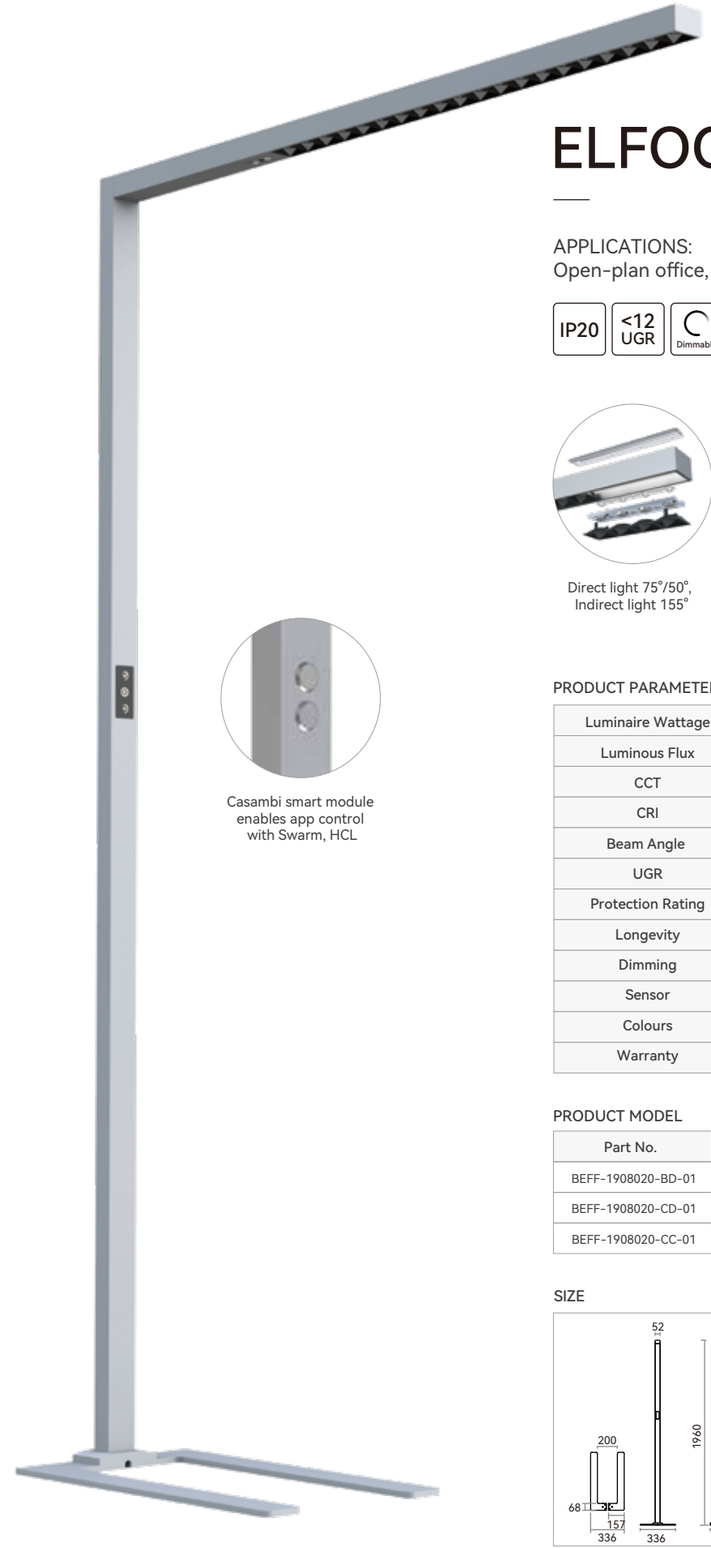



Casambi smart module
enables app control
with Swarm, HCL

ELFOO-F 2.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <12 UGR | Dimmable | Tunable White | HCL system | CASAMBI | swarm | CE | RoHS

Direct light 75°/50°,
Indirect light 155°



Daylight sensor
Motion sensor



Casambi smart module
enables app control
with Swarm, HCL


PRODUCT PARAMETERS

Luminaire Wattage	80W		
Luminous Flux	10800lm	9600lm	10500lm
CCT	3000/4000/6000K	3000~5700K	3000~5700K
CRI	>80		
Beam Angle	↑155° / 75°↓ or ↑155° / 50°↓		
UGR	<12		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor	Casambi	
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BEFF-1908020-BD-01	↑8500lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BEFF-1908020-CD-01	↑7500lm/2100lm↓	↑60W/20W↓	3000~5700K
BEFF-1908020-CC-01	↑8800lm/1700lm↓	↑60W/20W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION





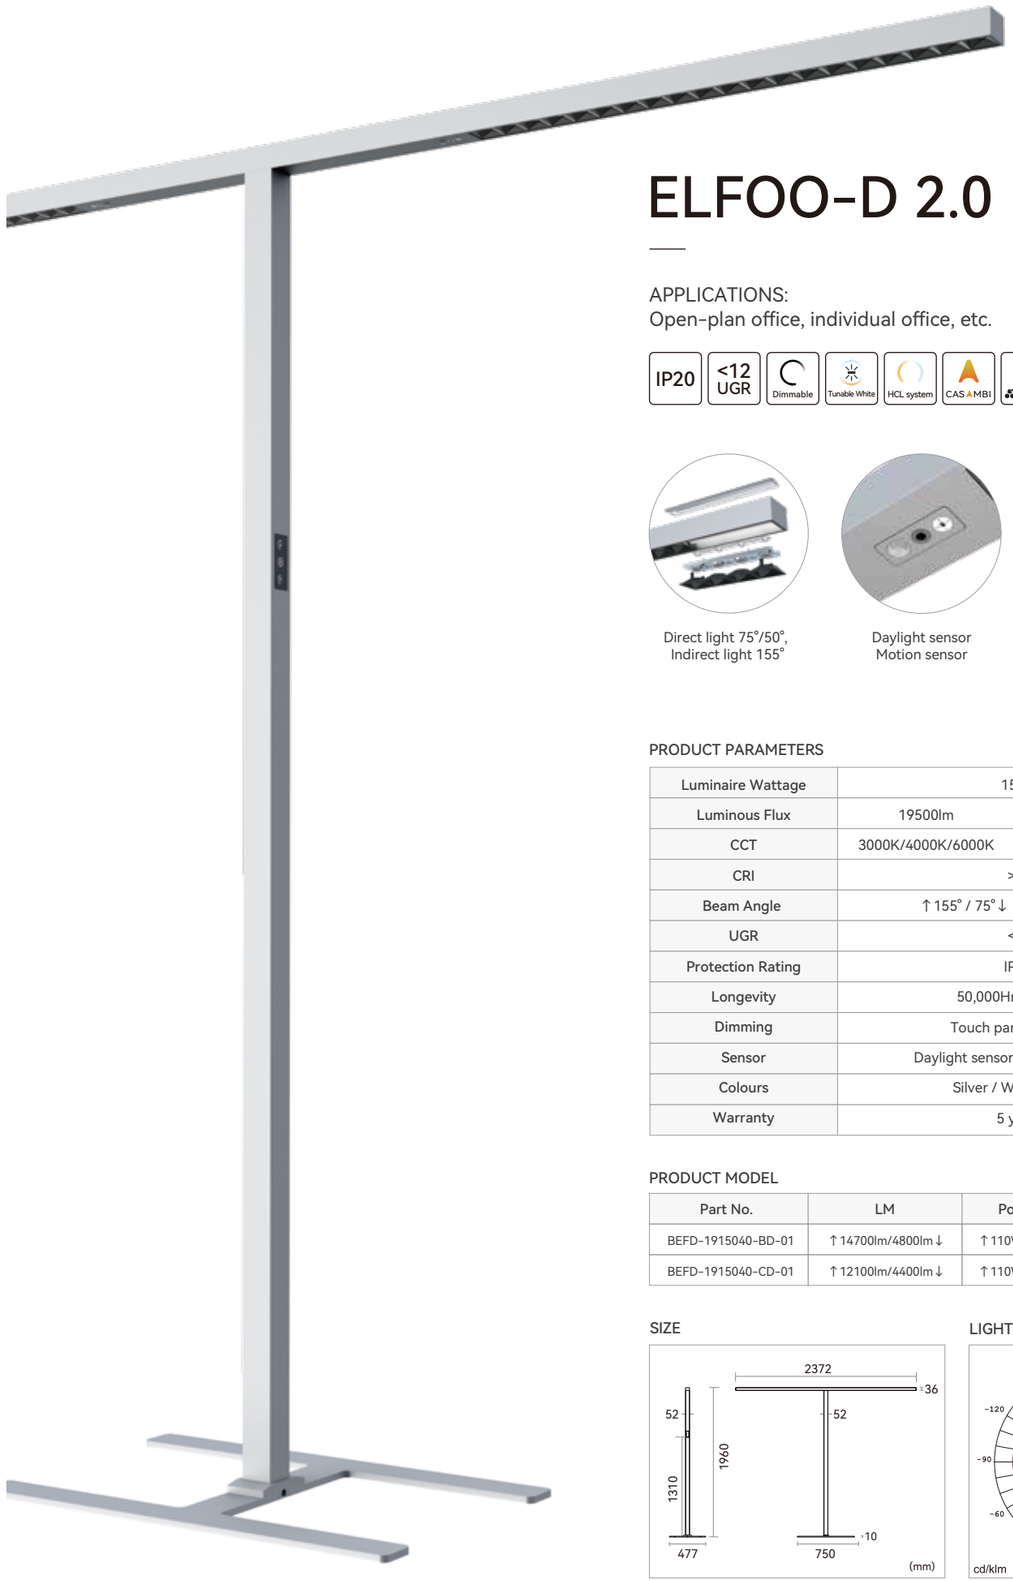

ELFOO-D 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <12 UGR | Dimmable | Tunable White | HCL system | CASAMBI | swarm | CE | RoHS

Direct light 75°/50°,
Indirect light 155°

Daylight sensor
Motion sensor



Direct and indirect
light control individually

PRODUCT PARAMETERS


Luminaire Wattage	150W	
Luminous Flux	19500lm	16500lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
Beam Angle	↑155° / 75°↓ or ↑155° / 50°↓	
UGR	<12	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Daylight sensor / Motion sensor	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	CCT
BEFD-1915040-BD-01	↑14700lm/4800lm↓	↑110W/40W↓	3000/4000/6000K
BEFD-1915040-CD-01	↑12100lm/4400lm↓	↑110W/40W↓	3000~5700K

SIZE

LIGHT DISTRIBUTION










LENO-F 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <6 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS



Micro reflector design
UGR<6



Daylight sensor
Presence sensor



Direct and indirect
light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W	
Luminous Flux	11600lm	11200lm
CCT	3000K/4000K/6000K	3000~5700K
CRI	>80	
Beam Angle	↑115° / 50°↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	Motion sensor / Presence sensor or Daylight sensor	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BLEF-1908020-BD-01	↑9300lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BLEF-1908020-CD-01	↑8950lm/2250lm↓	↑60W/20W↓	3000~5700K

SIZE




LIGHT DISTRIBUTION







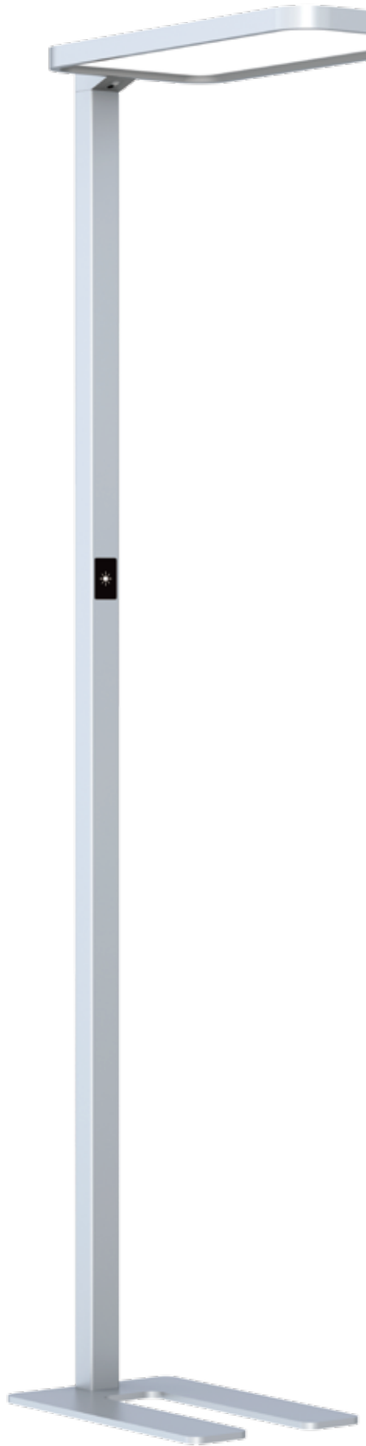


MAYE-FR 2.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | Tunable White | HCL system | CAS A MBI | SWARM | CE | RoHS



High light efficiency reach 150LM/W



Daylight sensor Motion sensor



Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BMRF-1908040-BN-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRF-1908040-BM-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRF-1908040-BD-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRF-1908022-BN	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRF-1908022-BM	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRF-1908022-BD	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRF-1908022-CD	↑8200lm/2200lm↓	↑58W/22W↓	3000~5700K
BMRF-1910020-BN	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRF-1910020-BM	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRF-1910020-BD	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRF-1910020-CD	↑11050lm/2500lm↓	↑80W/20W↓	3000~5700K

SIZE



LIGHT DISTRIBUTION









MAYE-FS 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | Tunable White | HCL system | CAS A MBI | SWARM | CE | RoHS



High light efficiency reach 150LM/W



Daylight sensor
Motion sensor



Direct and indirect light control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BMSF-1908040-BN-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMSF-1908040-BM-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMSF-1908040-BD-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMSF-1908022-BN	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMSF-1908022-BM	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMSF-1908022-BD	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMSF-1908022-CD	↑8200lm/2200lm↓	↑58W/22W↓	3000~5700K
BMSF-1910020-BN	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMSF-1910020-BM	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMSF-1910020-BD	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMSF-1910020-CD	↑11050lm/2500lm↓	↑80W/20W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION



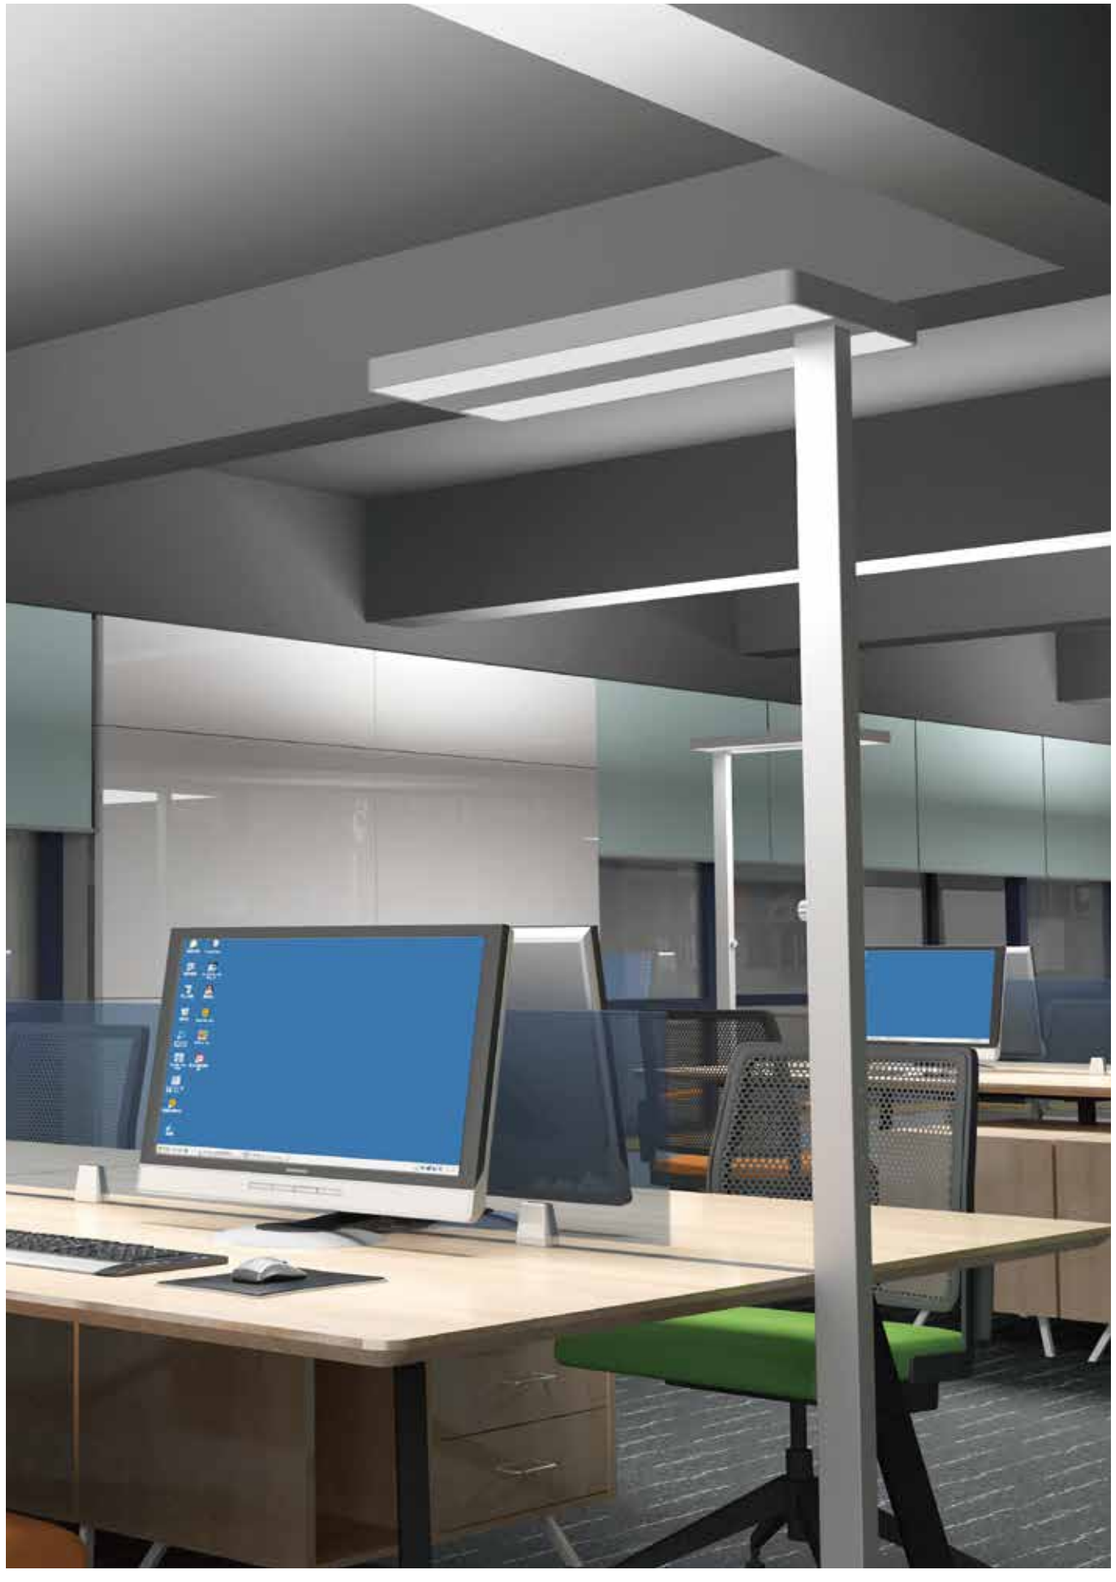

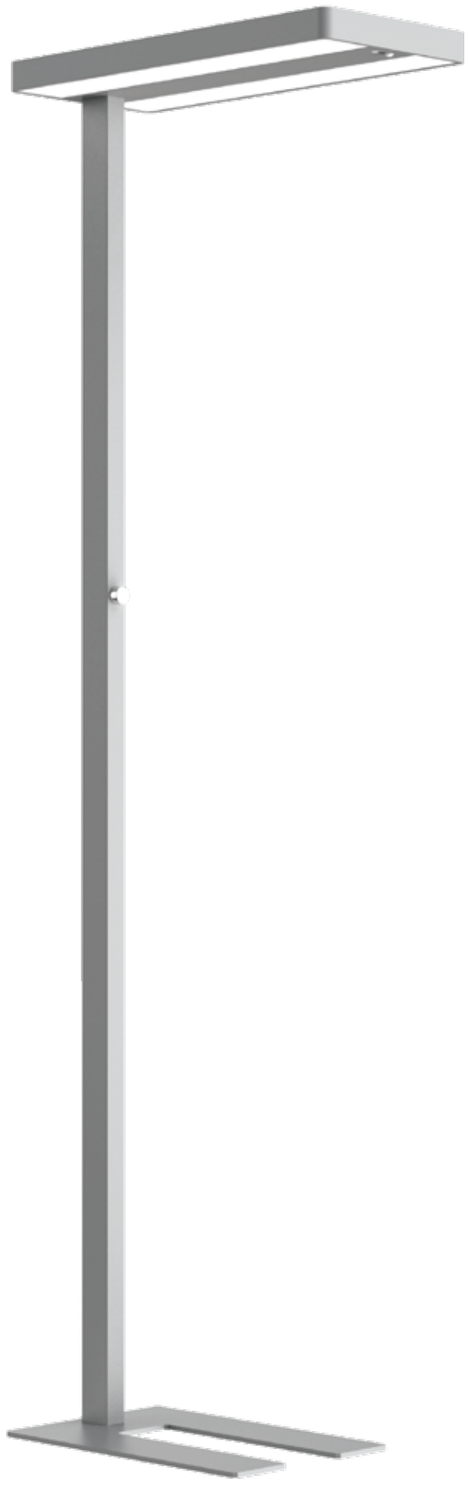

HOMEC 3.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.


IP20 | <19 UGR | Dimmable | CE | RoHS



High light efficiency
reach 145LM/W



Daylight sensor
Motion sensor



Cut-Off Pole, Good for
shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	CCT
BHOJ-1906030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOJ-1906030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOJ-1906030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOJ-1908040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOJ-1908040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOJ-1908040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOJ-1908020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOJ-1908020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOJ-1908020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION



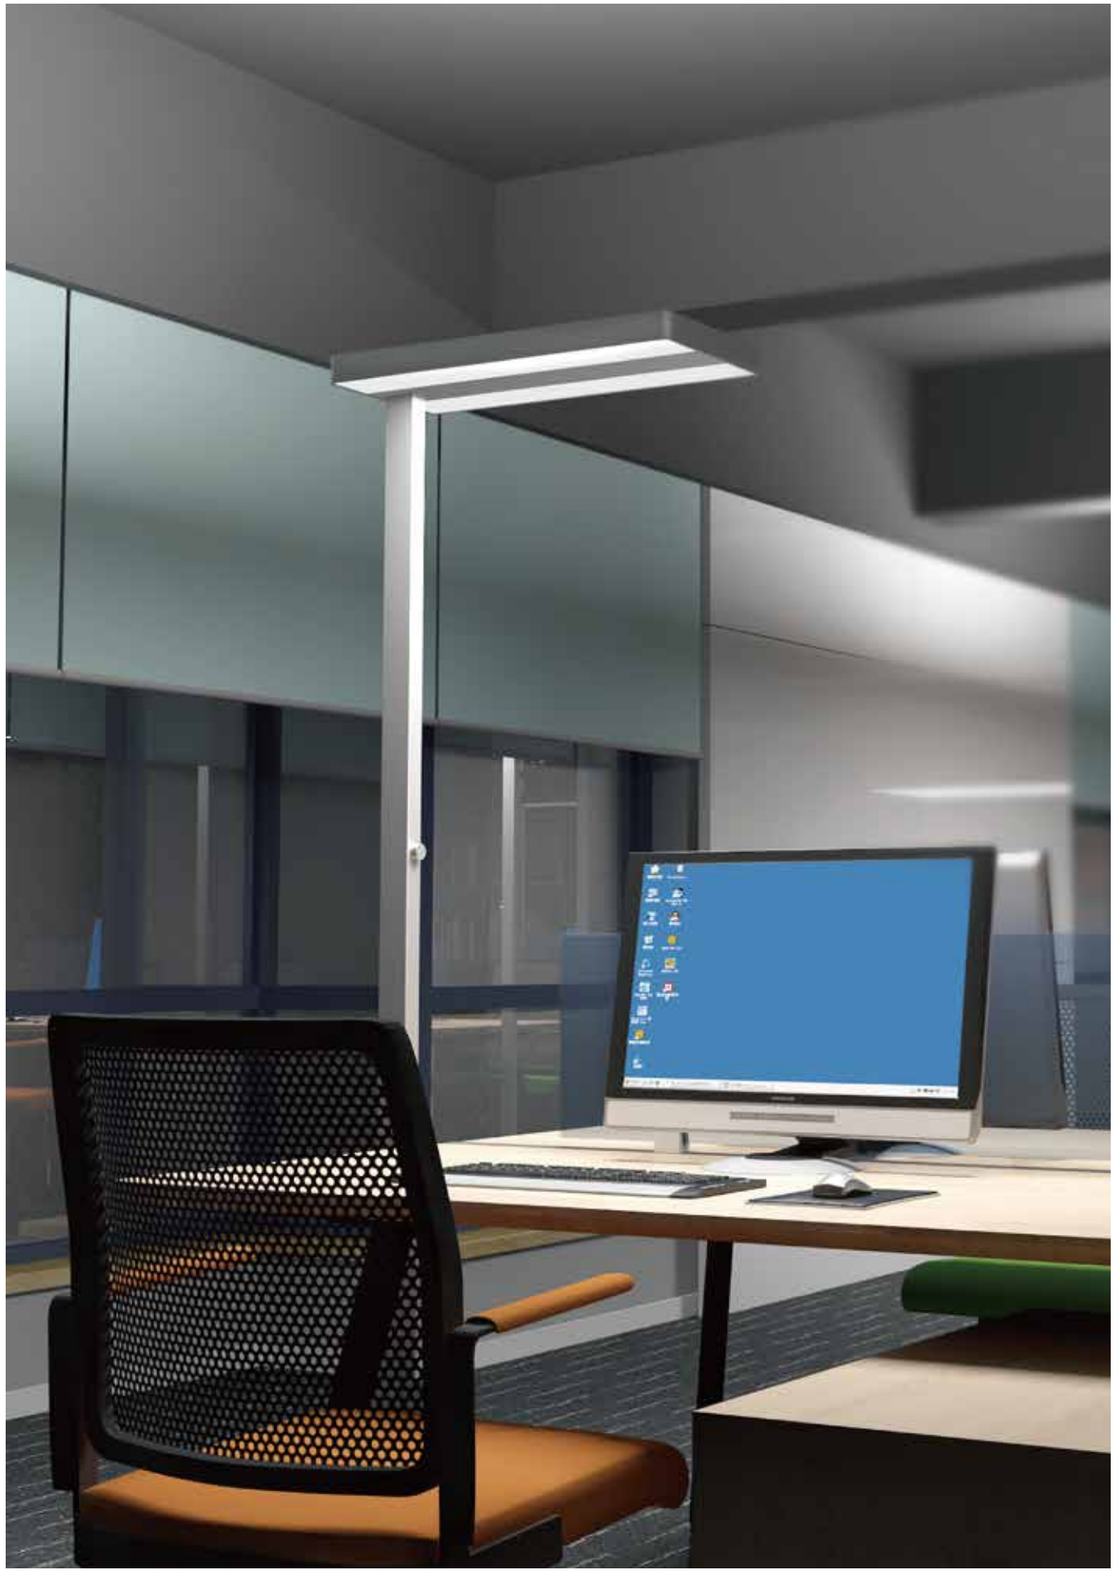



HOMEO 3.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.


IP20 | <19 UGR | Dimmable | CE | RoHS



High light efficiency reach 145LM/W



Daylight sensor Motion sensor



Knob dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BHOF-1906030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOF-1906030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOF-1906030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOF-1908040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOF-1908040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOF-1908040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOF-1908020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOF-1908020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOF-1908020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K

SIZE




LIGHT DISTRIBUTION








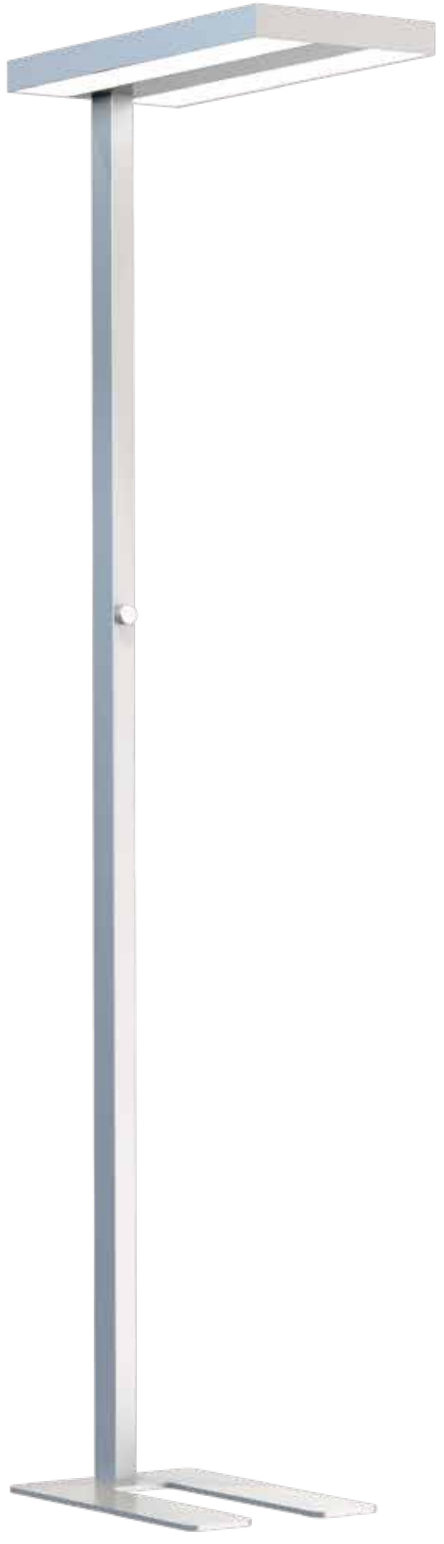

NITEC 3.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.


IP20 | <19 UGR | Dimmable | CE | RoHS



High light efficiency reach 145LM/W



UGR<19, uniform and healthy lighting



Cut-Off Pole, Good for shipment and sales online


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNIJ-1906030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIJ-1906030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIJ-1906030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIJ-1908040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIJ-1908040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIJ-1908040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIJ-1908020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIJ-1908020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIJ-1908020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K


SIZE



LIGHT DISTRIBUTION





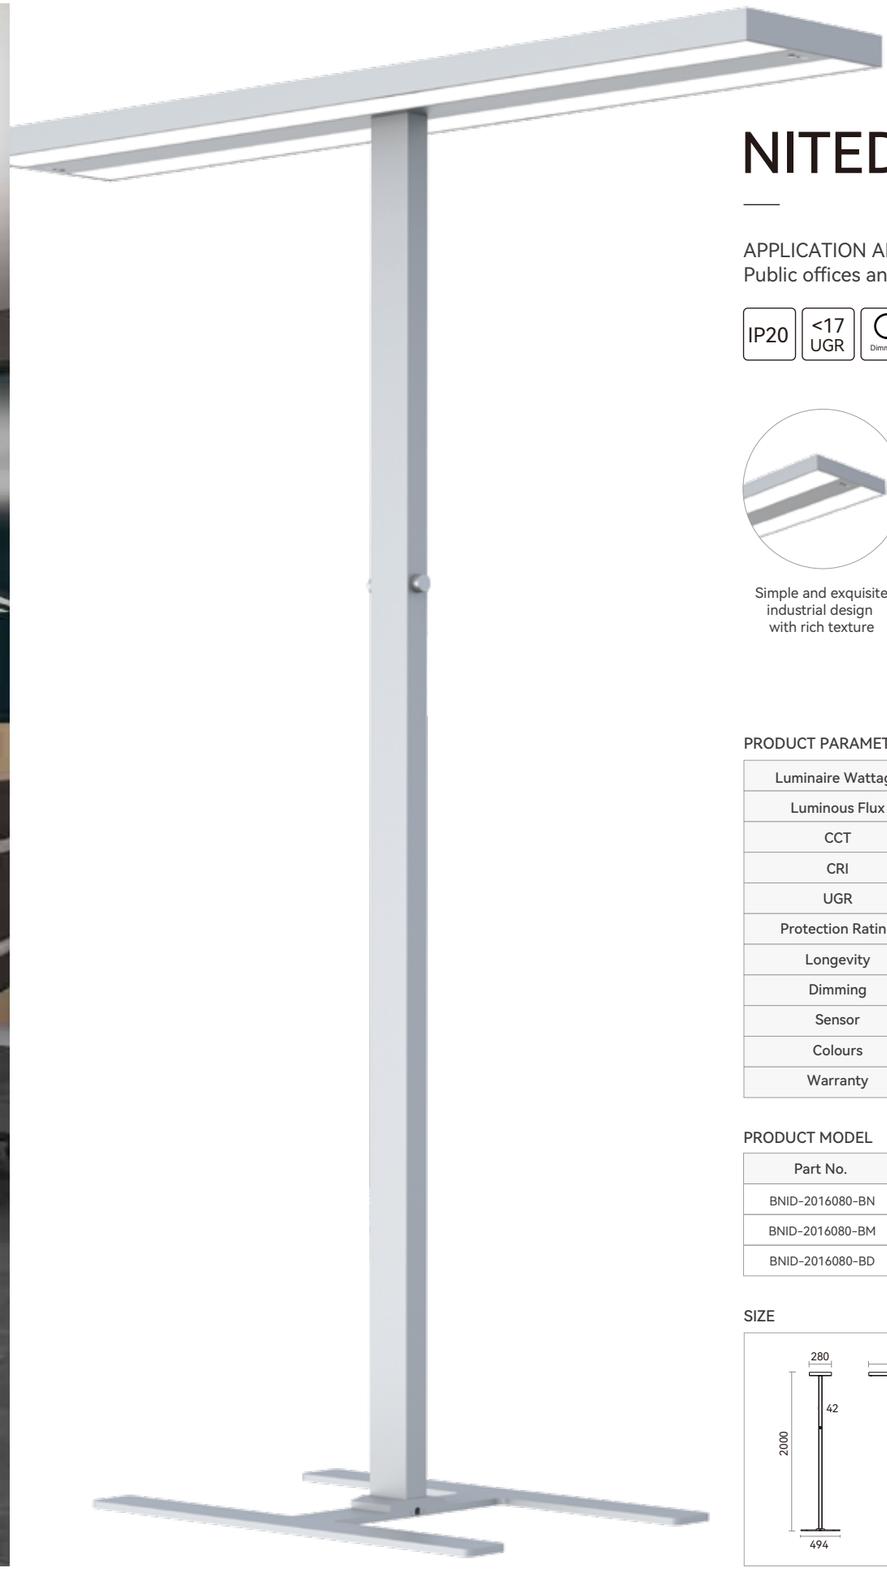


NITED


APPLICATION AREAS:
Public offices and other office spaces.

IP20 | <17 UGR | Dimmable | CE | RoHS

Simple and exquisite industrial design with rich texture



UGR<17, uniform and healthy lighting



Daylight sensor
Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	160W
Luminous Flux	19200lm
CCT	3000K / 4000K / 6000K
CRI	>80
UGR	<17
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Knob dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	CCT
BNID-2016080-BN	↑11500lm/7700lm↓	↑80W/80W↓	3000/4000/6000K
BNID-2016080-BM	↑11500lm/7700lm↓	↑80W/80W↓	3000/4000/6000K
BNID-2016080-BD	↑11500lm/7700lm↓	↑80W/80W↓	3000/4000/6000K


SIZE



LIGHT DISTRIBUTION



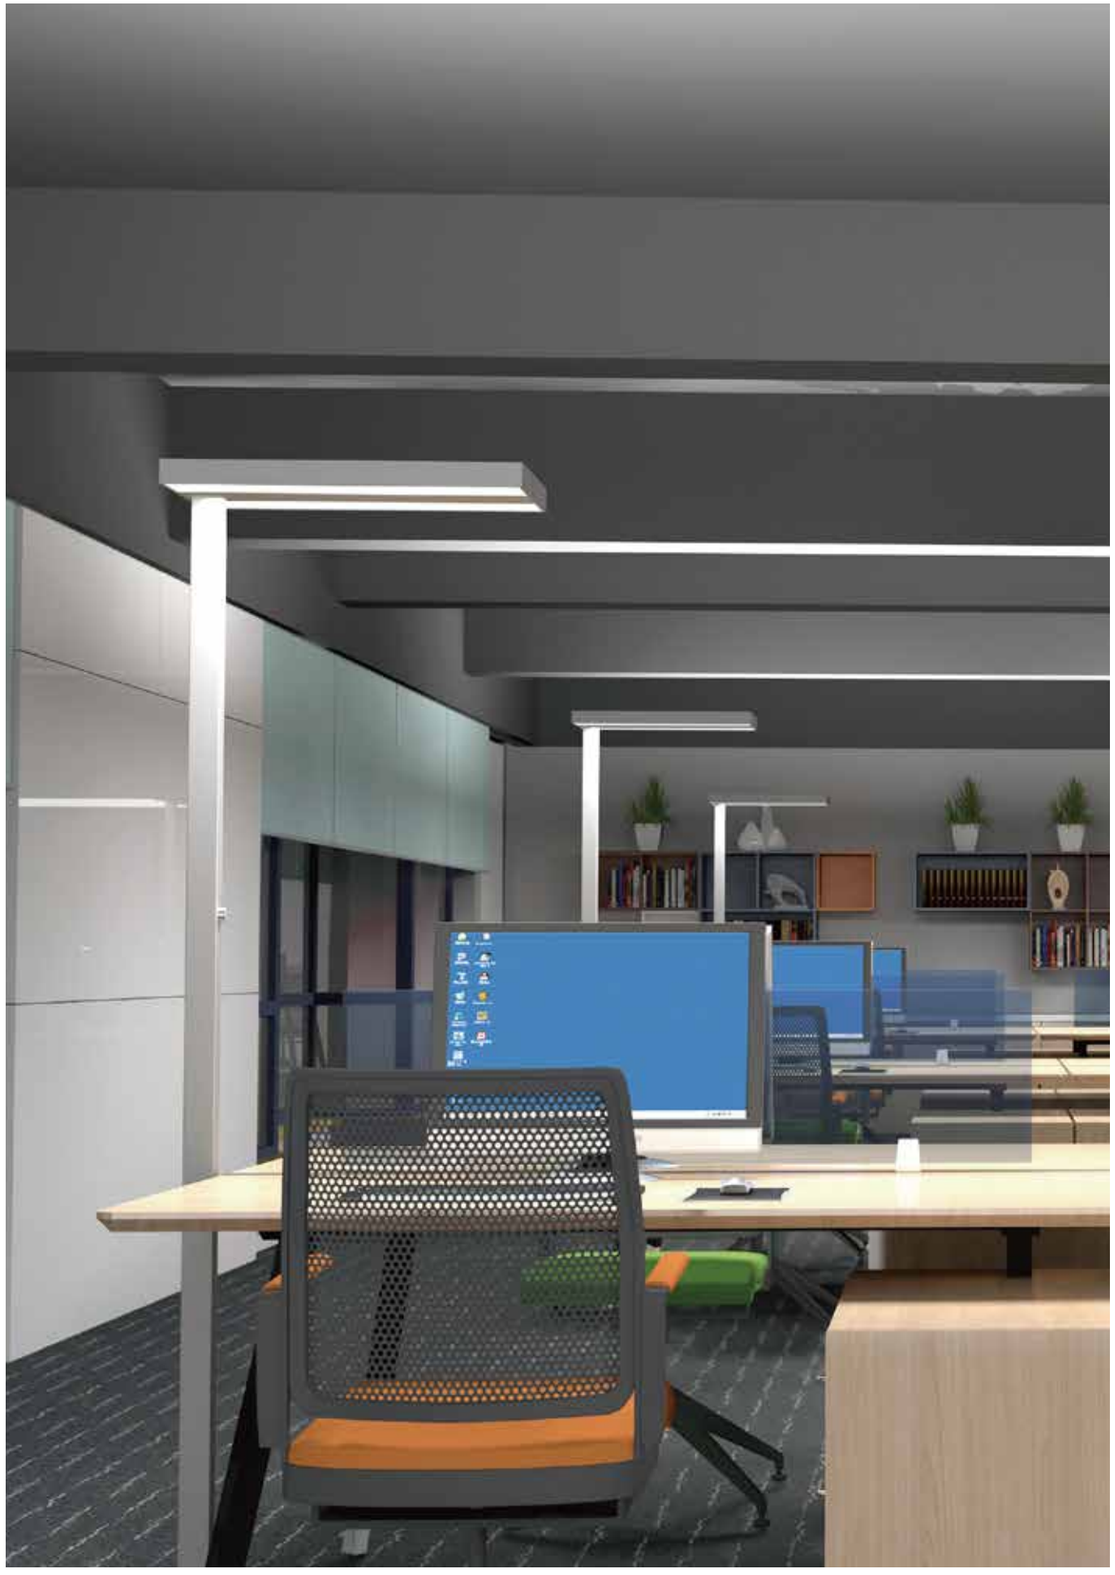


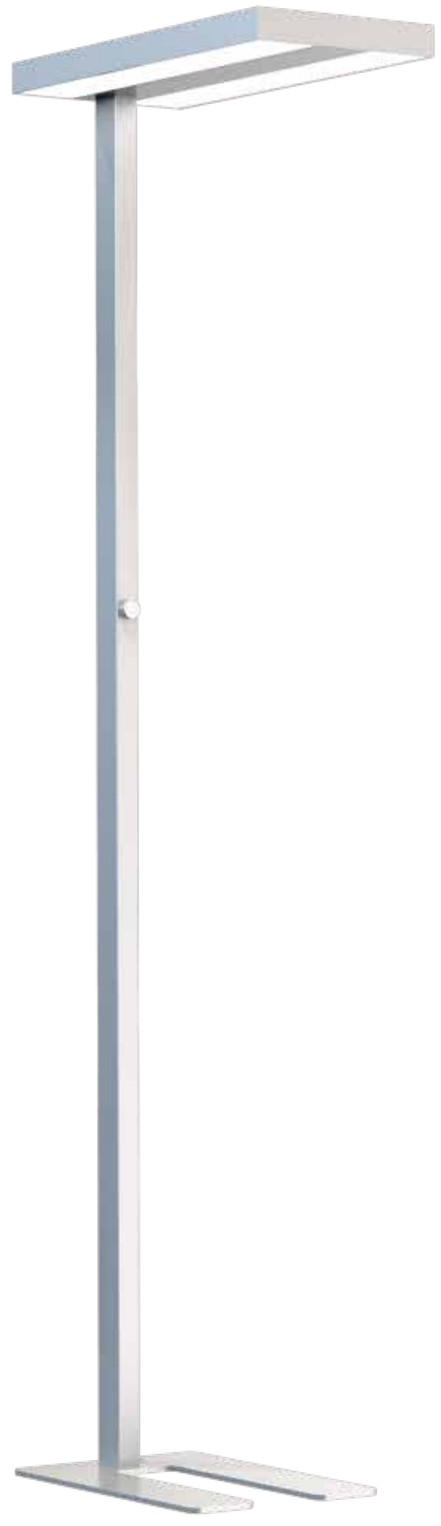

NITEO 3.0 NEW

APPLICATION AREAS:
For personal offices, public offices and other office spaces.


IP20 | <19 UGR | Dimmable | CE | RoHS



Simple and exquisite industrial design with rich texture



UGR<19, uniform and healthy lighting



Daylight sensor
Motion sensor


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BNIF-1906030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIF-1906030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIF-1906030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIF-1908040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIF-1908040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIF-1908040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIF-1908020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIF-1908020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIF-1908020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K

SIZE



LIGHT DISTRIBUTION



02

DESK FIXED LUMINAIRES

APPLICATIONS:
Open-plan office, individual office, etc.



DESK FIXED LUMINAIRES



FIT-T



MAYE-TR 2.0



MAYE-TS 2.0



HOMET 3.0



NITET 3.0




ELFOO-T 2.0



LENO-T 2.0

Luminaire Wattage	60W	80W/ 100W	80W/ 100W	60W/ 80W	60W/ 80W	80W	80W
Luminous Flux	5530lm	11200lm/ 11516lm/ 15000lm	11200lm/ 11516lm/ 15000lm	7730lm/ 10800lm/ 11600lm	7730lm/ 10800lm/ 11600lm	10800lm	11600lm
UGR	<18	<18/ <14/ <13	<18/ <14/ <13	<16/ <19/ <11	<16/ <19/ <11	<12	<6
optics	↑100°/70°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑115° / 80°↓	↑155° / 75°↓or ↑155° / 50°↓	↑115° / 50°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K Tunable white	3000K/ 4000K/ 6000K Tunable white
Dimming	Touch panel dimming	Touch panel dimming	Touch panel dimming	Knob dimming	Knob dimming	Touch panel dimming	Touch panel dimming
Sensor	Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Motion sensor	Daylight sensor & Presence sensor/ Daylight sensor & Motion sensor
Colours							



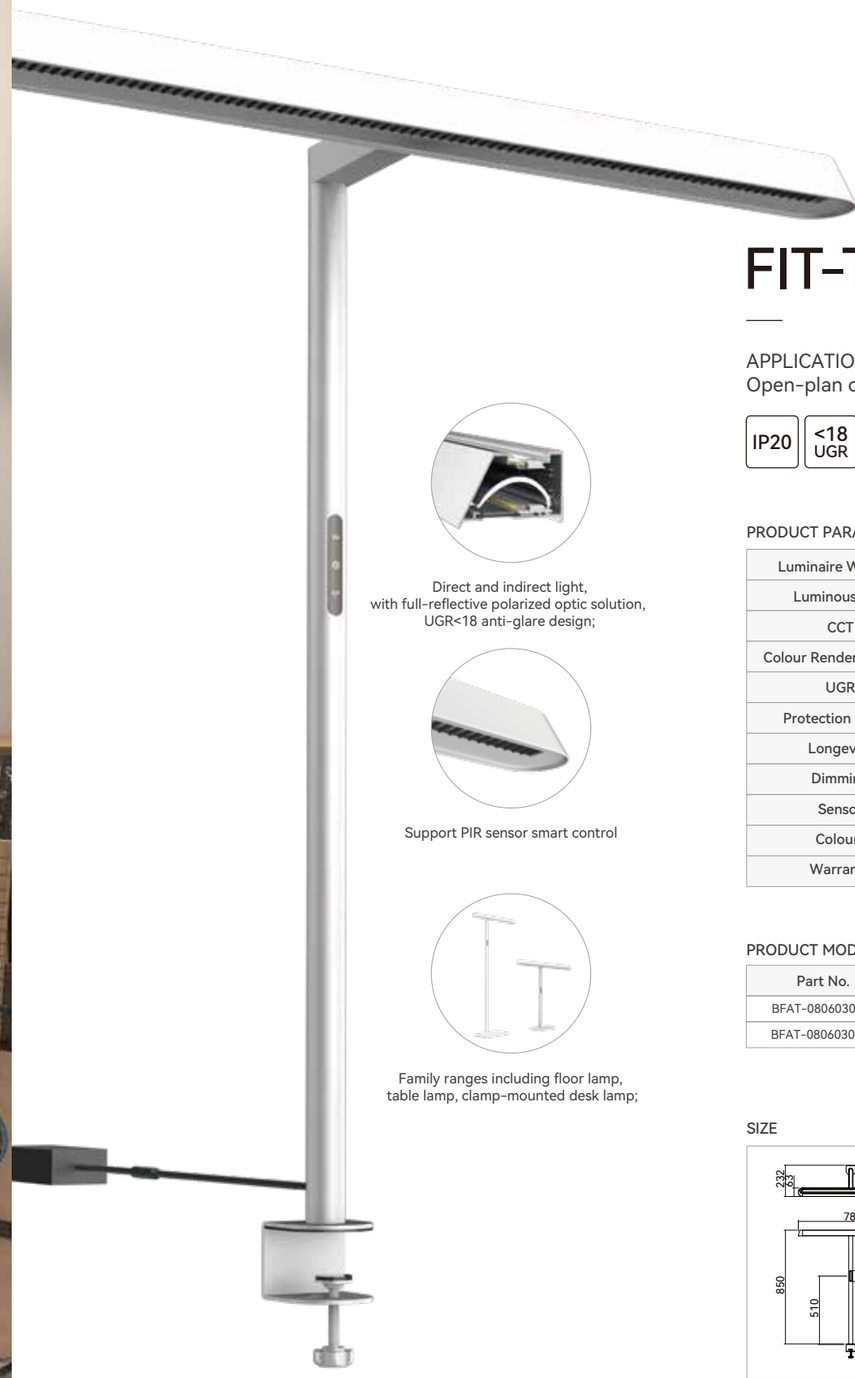

FIT-T NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | CE | RG1&2

Direct and indirect light,
with full-reflective polarized optic solution,
UGR<18 anti-glare design;

Support PIR sensor smart control

Family ranges including floor lamp,
table lamp, clamp-mounted desk lamp;


PRODUCT PARAMETERS

Luminaire Wattage	60W	
Luminous Flux	5530lm	
CCT	3000K / 4000K / 6000K	
Colour Rendering Index	>80	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Dimming	Touch panel dimming	
Sensor	NO	Motion sensor
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	CCT
BFAT-0806030-BN	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K
BFAT-0806030-BM	↑4050lm/1480lm↓	↑30W/30W↓	3000/4000/6000K


SIZE



LIGHT DISTRIBUTION





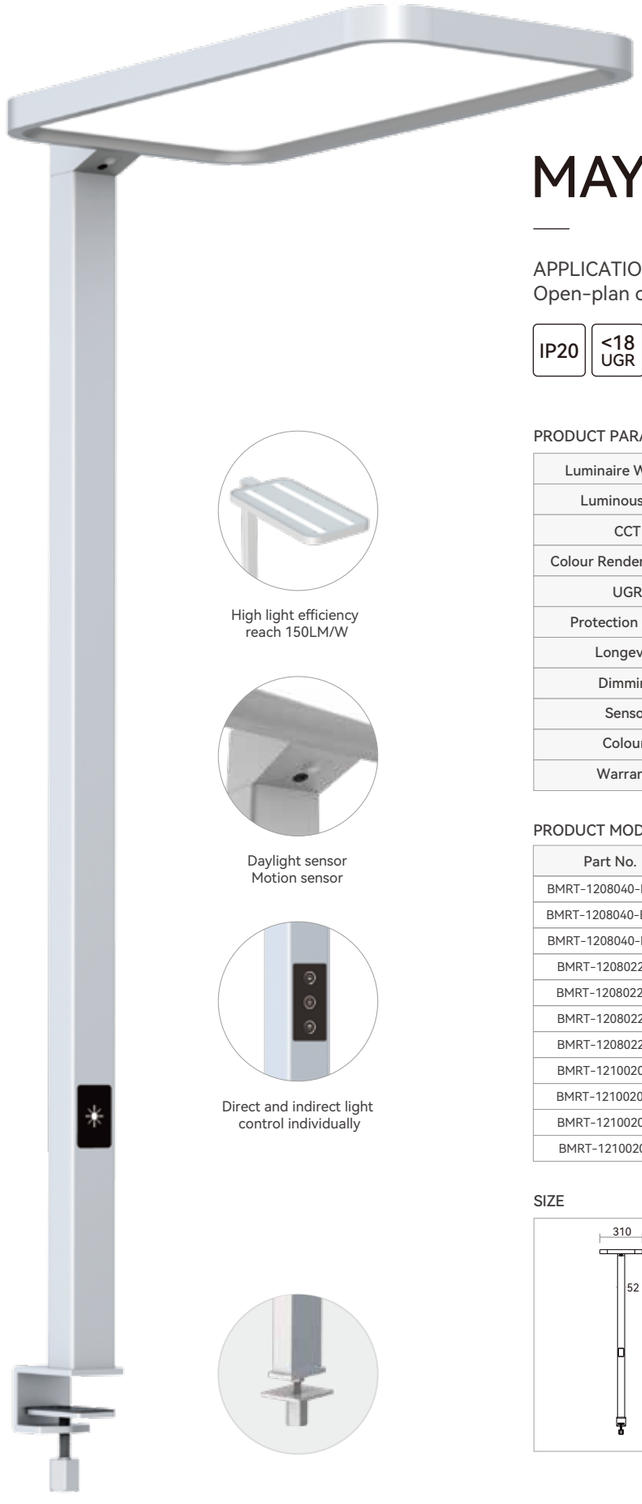

High light efficiency
reach 150LM/W

Daylight sensor
Motion sensor

Direct and indirect light
control individually

MAYE-TR 2.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BMRT-1208040-BN-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRT-1208040-BM-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRT-1208040-BD-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMRT-1208022-BN	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRT-1208022-BM	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRT-1208022-BD	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMRT-1208022-CD	↑8200lm/2200lm↓	↑58W/22W↓	3000~5700K
BMRT-1210020-BN	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRT-1210020-BM	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRT-1210020-BD	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMRT-1210020-CD	↑11050lm/2500lm↓	↑80W/20W↓	3000~5700K


SIZE



LIGHT DISTRIBUTION





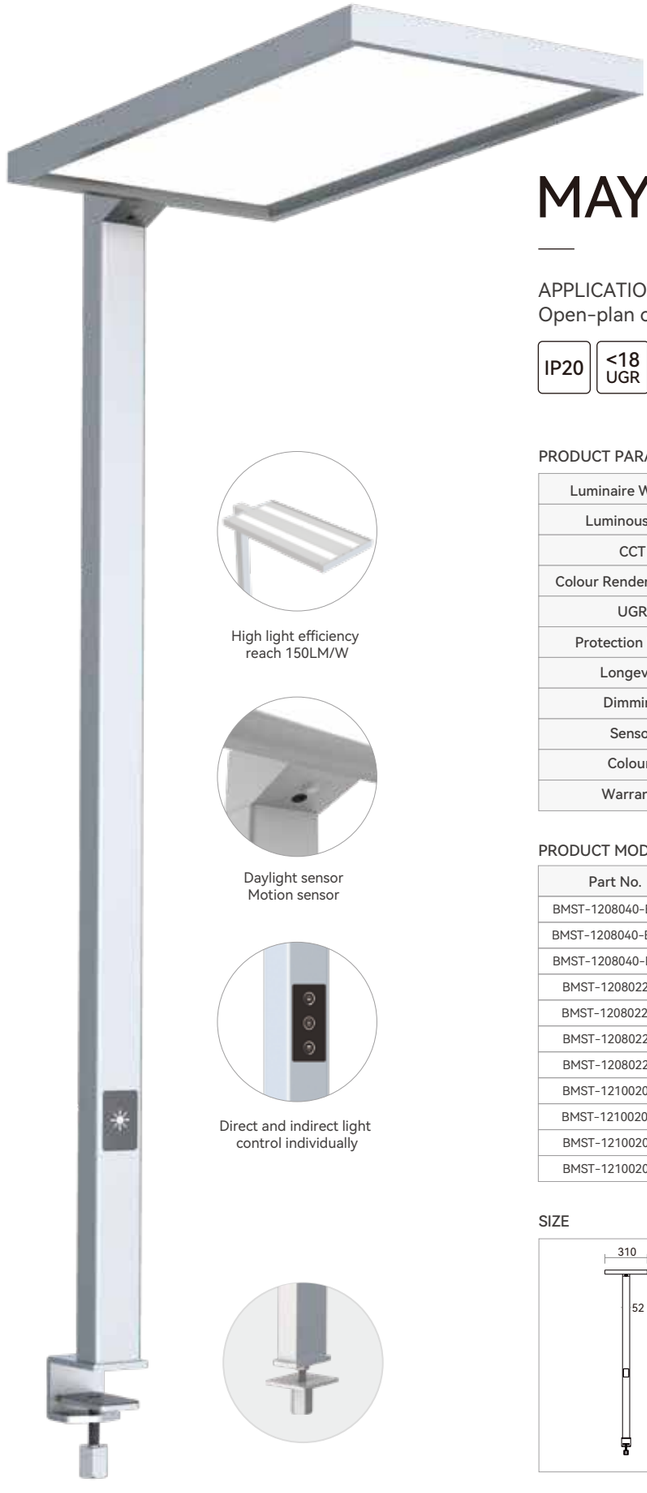

MAYE-TS 2.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <18 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS

High light efficiency
reach 150LM/W

Daylight sensor
Motion sensor

Direct and indirect light
control individually


PRODUCT PARAMETERS

Luminaire Wattage	80W		100W
Luminous Flux	11200lm	11516lm	15000lm
CCT	3000K / 4000K / 6000K / Tunable white		
Colour Rendering Index	>80		
UGR	<18	<14	<13
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Touch panel dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BMST-1208040-BN-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMST-1208040-BM-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMST-1208040-BD-01	↑6400lm/4800lm↓	↑40W/40W↓	3000/4000/6000K
BMST-1208022-BN	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMST-1208022-BM	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMST-1208022-BD	↑8926lm/2590lm↓	↑58W/22W↓	3000/4000/6000K
BMST-1208022-CD	↑8200lm/2200lm↓	↑58W/22W↓	3000~5700K
BMST-1210020-BN	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMST-1210020-BM	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMST-1210020-BD	↑12500lm/2500lm↓	↑80W/20W↓	3000/4000/6000K
BMST-1210020-CD	↑11050lm/2500lm↓	↑80W/20W↓	3000~5700K

SIZE




LIGHT DISTRIBUTION







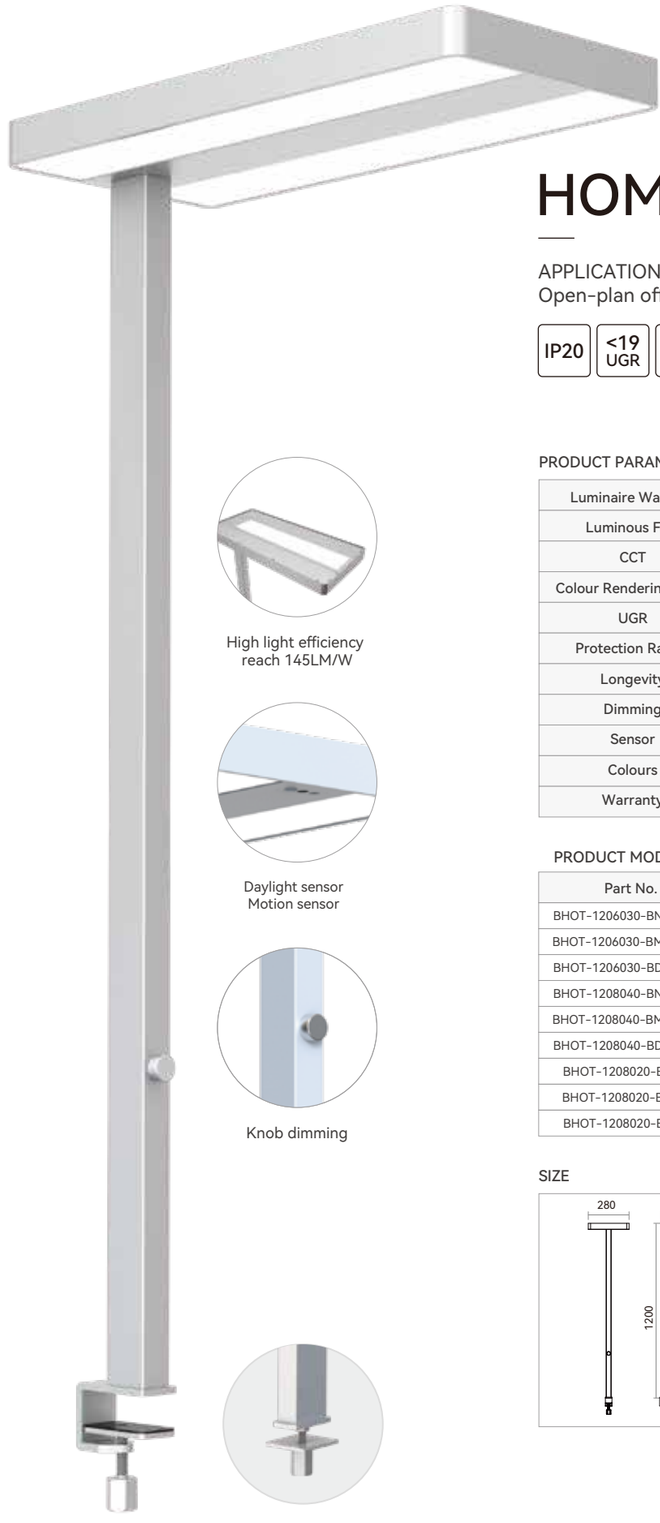

HOMET 3.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <19 UGR | Dimmable | CE | RoHS

High light efficiency
reach 145LM/W

Daylight sensor
Motion sensor

Knob dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL

Part No.	LM	Power	CCT
BHOT-1206030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOT-1206030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOT-1206030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BHOT-1208040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOT-1208040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOT-1208040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BHOT-1208020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOT-1208020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BHOT-1208020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K


SIZE



LIGHT DISTRIBUTION





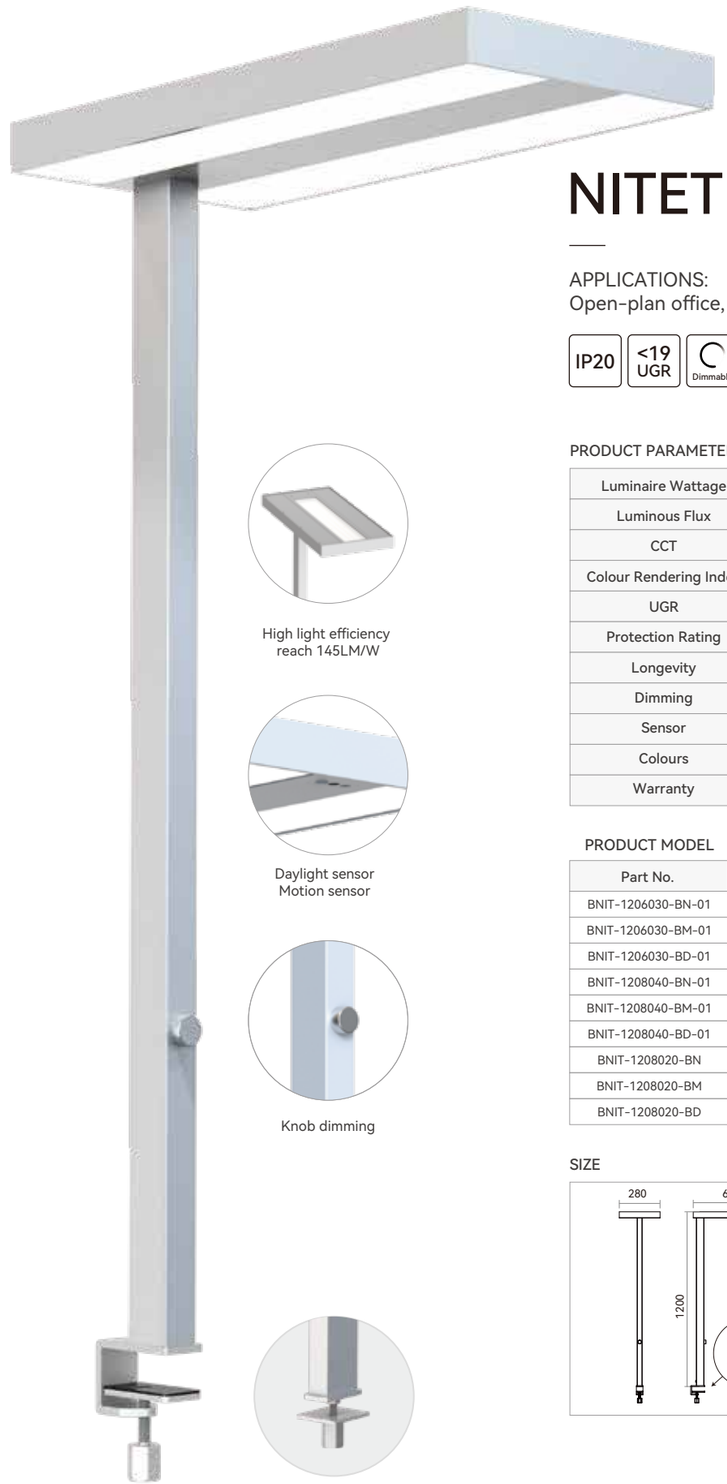

NITET 3.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <19 UGR | Dimmable | CE | RoHS

High light efficiency
reach 145LM/W

Daylight sensor
Motion sensor

Knob dimming

PRODUCT PARAMETERS


Luminaire Wattage	60W	80W	
Luminous Flux	7730lm	10800lm	11600lm
CCT	3000K / 4000K / 6000K		
Colour Rendering Index	>80		
UGR	<16	<19	<11
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Dimming	Knob dimming		
Sensor	Daylight sensor / Motion sensor		
Colours	Silver / White / Black		
Warranty	5 years		

PRODUCT MODEL

Part No.	LM	Power	CCT
BNIT-1206030-BN-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIT-1206030-BM-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIT-1206030-BD-01	↑4990lm/2740lm↓	↑30W/30W↓	3000/4000/6000K
BNIT-1208040-BN-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIT-1208040-BM-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIT-1208040-BD-01	↑6300lm/4500lm↓	↑40W/40W↓	3000/4000/6000K
BNIT-1208020-BN	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIT-1208020-BM	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K
BNIT-1208020-BD	↑9600lm/2000lm↓	↑60W/20W↓	3000/4000/6000K

SIZE

LIGHT DISTRIBUTION






ELFOO-T 2.0

NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <12 UGR | Dimmable | Tunable White | HCL system | CASAMBI | SWARM | CE | RoHS

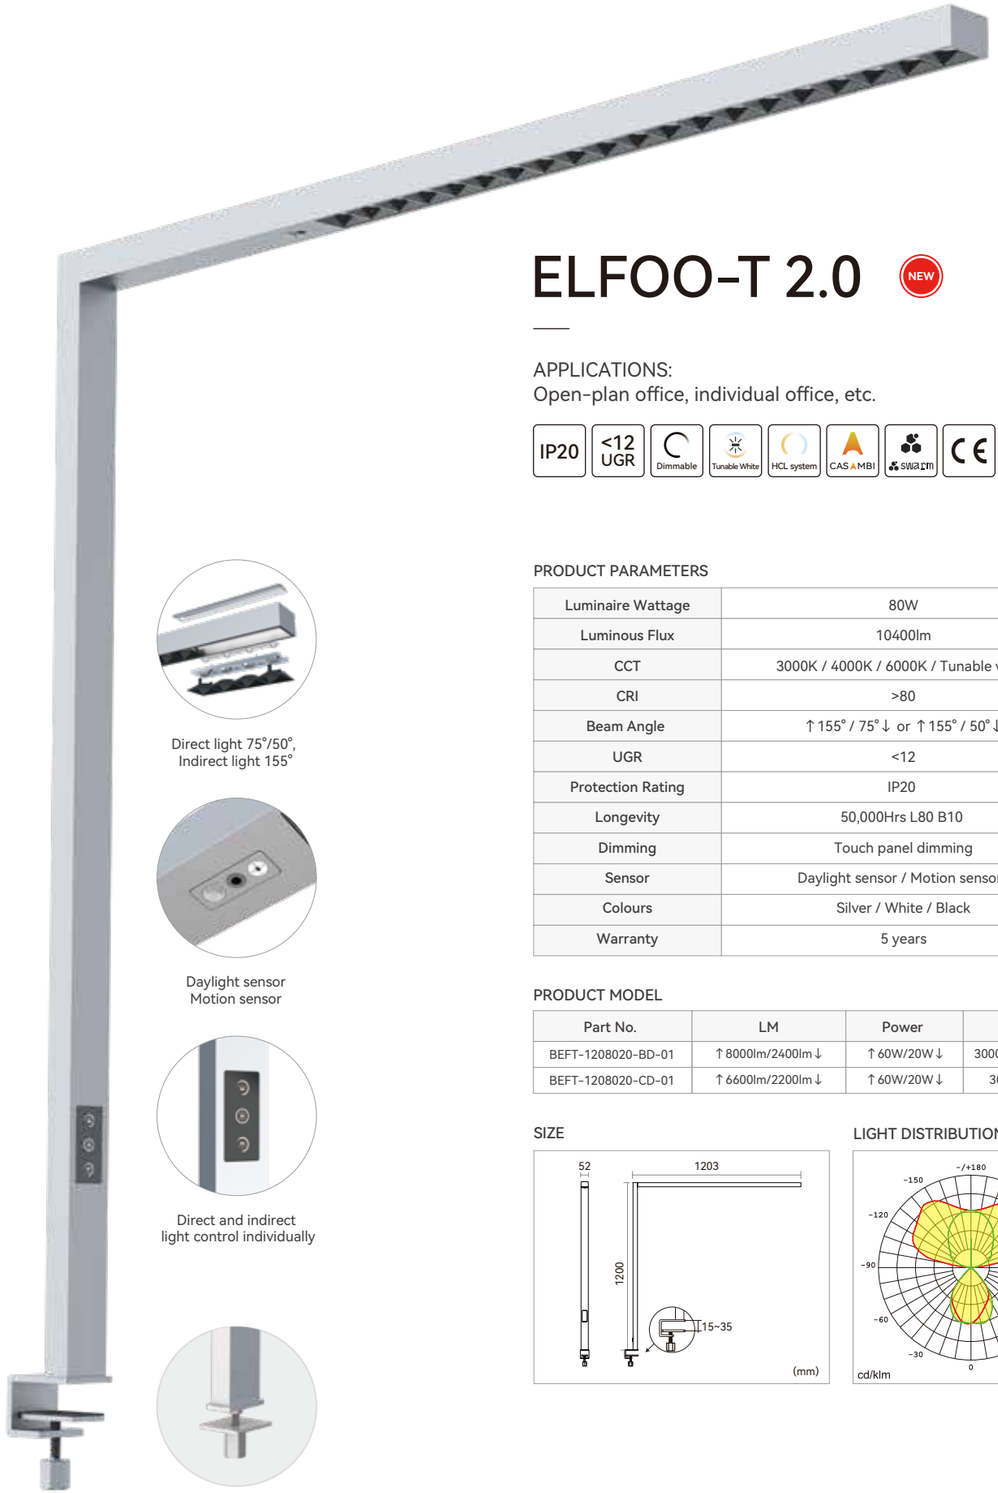

Direct light 75°/50°,
Indirect light 155°

Daylight sensor
Motion sensor

Direct and indirect
light control individually

PRODUCT PARAMETERS

Luminaire Wattage	80W
Luminous Flux	10400lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑155° / 75°↓ or ↑155° / 50°↓
UGR	<12
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Motion sensor
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	CCT
BEFT-1208020-BD-01	↑8000lm/2400lm↓	↑60W/20W↓	3000/4000/6000K
BEFT-1208020-CD-01	↑6600lm/2200lm↓	↑60W/20W↓	3000~5700K

SIZE

LIGHT DISTRIBUTION



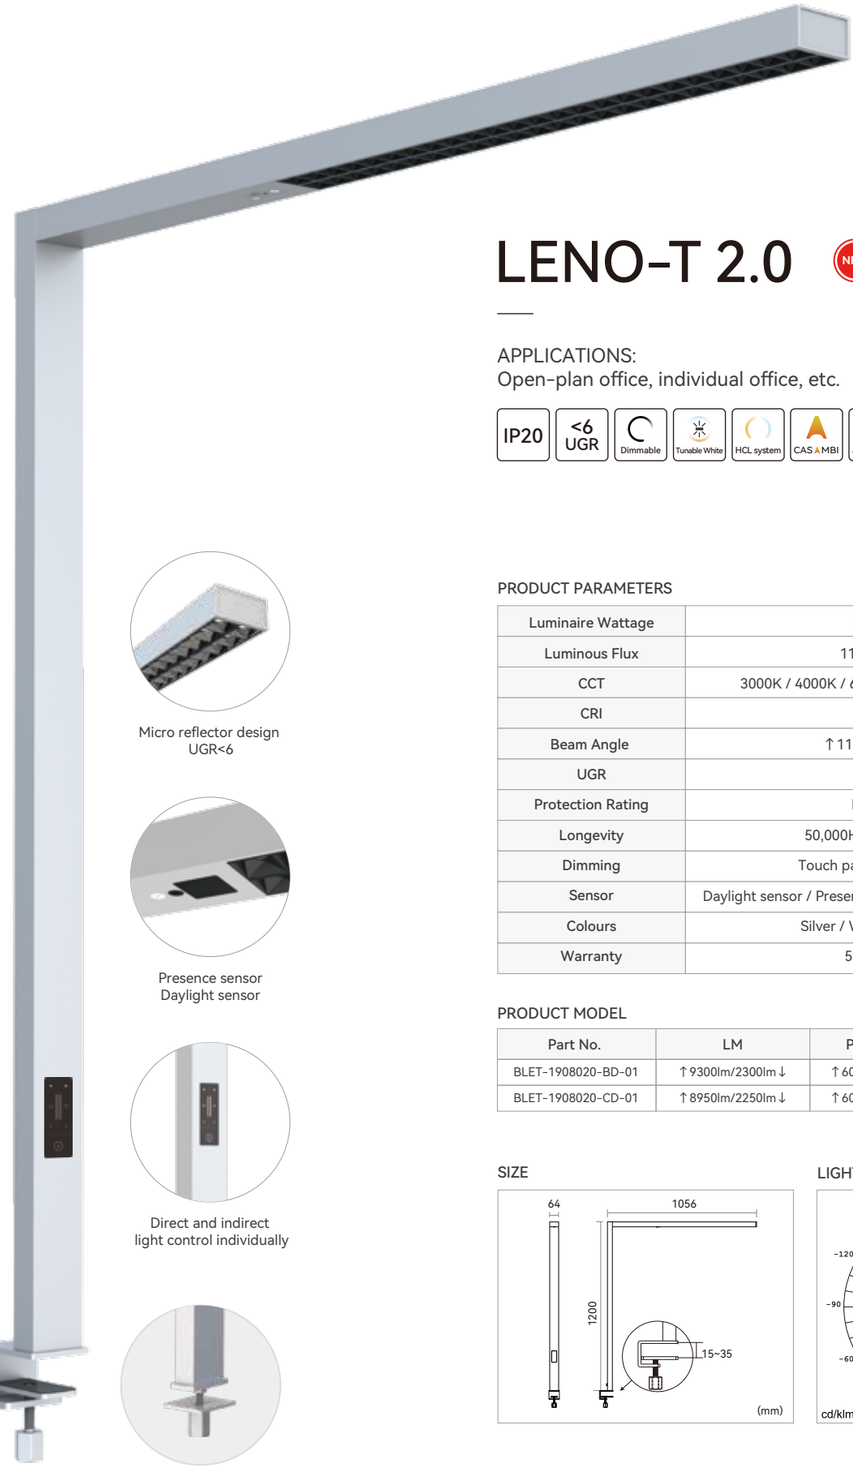

LENO-T 2.0 NEW

APPLICATIONS:
Open-plan office, individual office, etc.

IP20 | <6 UGR | Dimmable | Tunable White | HCL system | CAS A MBI | swarm | CE | RoHS

Micro reflector design
UGR<6

Presence sensor
Daylight sensor

Direct and indirect
light control individually

PRODUCT PARAMETERS


Luminaire Wattage	80W
Luminous Flux	11600lm
CCT	3000K / 4000K / 6000K / Tunable white
CRI	>80
Beam Angle	↑115° / 50°↓
UGR	<6
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Dimming	Touch panel dimming
Sensor	Daylight sensor / Presence sensor or Motion sensor
Colours	Silver / White / Black
Warranty	5 years

PRODUCT MODEL

Part No.	LM	Power	CCT
BLET-1908020-BD-01	↑9300lm/2300lm↓	↑60W/20W↓	3000/4000/6000K
BLET-1908020-CD-01	↑8950lm/2250lm↓	↑60W/20W↓	3000~5700K

SIZE

LIGHT DISTRIBUTION





03

PENDANT LUMINAIRES

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

PENDANT LUMINAIRES



Dawn-P0



Dawn-P1



Equo-P



MAYE Pro-PS



ROMAN-P0



ROMAN-P1



EZY-P

Luminaire Wattage	60W/ 80W	60W/ 70W	60W/ 80W Power switchable	60W/ 70W	60W/ 70W	60W/ 80W/ 120W	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable
Luminous Flux	10000lm/ 12800lm	9600lm/ 10700lm	7800lm/ 9100lm	8660lm/ 9600lm/ 11200lm	8910lm/ 10400lm	9000lm/ 12000lm/ 18000lm	2500lm/ 3240lm 4000lm/ 5300lm 6720lm/ 8400lm
UGR	<13	<17	<16	<16	<15	<6	<19/ <22
optics	↑115°/70°↓	↑115° / 70°↓	↑155° / 70°↓	↑110° / 80°↓	↑115° / 60°↓	↑115° / 60°↓	↑110° / 90°↓
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K CCT switchable
Function	On/off / DALI	On/off / DALI	On/off / DALI	On/off / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / DALI
Colours							

PENDANT LUMINAIRES



KEY-P




FREE-P




ROMI-P



ELFOO-P



LENO-P2



LICON-P

Luminaire Wattage	30W/ 40W/ 50W/ 60W	50W/ 60W	18W/ 30W/ 48W/ 80W	60W/ 70W	50W/ 60W	40W/ 48W/ 50W/ 60W
Luminous Flux	3600lm/ 4800lm/ 6250lm/ 7500lm 6500lm/ 7800lm	6350lm/ 7620lm	1700lm/ 3300lm/ 5760lm/ 9600lm	6300lm/ 7400lm	6250lm/ 7500lm	3600lm/ 5300lm/ 4500lm/ 6600lm
UGR	<13	<19	<18	<15	<6	<21
optics	↑110°/ 90°↓	↑115° / 80°↓	↑100° / 95°↓	↑140° / 75°↓or ↑140° / 50°↓	↑115° / 50°↓	↑110° / 80°↓
CRI	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours						


Dawn-P0

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <13 UGR | Dimmable | CE | RoHS



- Up to 160 lm/W for greater energy savings.
- Anti glare lens solution with side micro-light, low glare and high visual comfort
- UGR < 13，Lmax≥65°≤3000cd/m²，compliant with professional lighting design requirements;
- 4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;

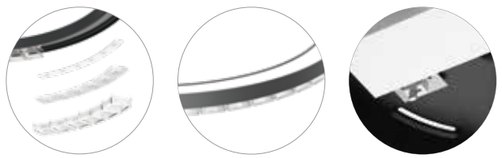


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W
Luminous Flux	10000lm	12800lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑115° / 70°↓	
UGR	<13	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BDAP0-6506024-NN	↑6700lm/3300lm↓	↑36W/24W↓	On/off
BDAP0-6506024-DN	↑6700lm/3300lm↓	↑36W/24W↓	DALI dimming
BDAP0-9008032-NN	↑7800lm/5000lm↓	↑48W/32W↓	On/off
BDAP0-9008032-DN	↑7800lm/5000lm↓	↑48W/32W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION






Dawn-P1

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <17 UGR | Dimmable | CE | RoHS

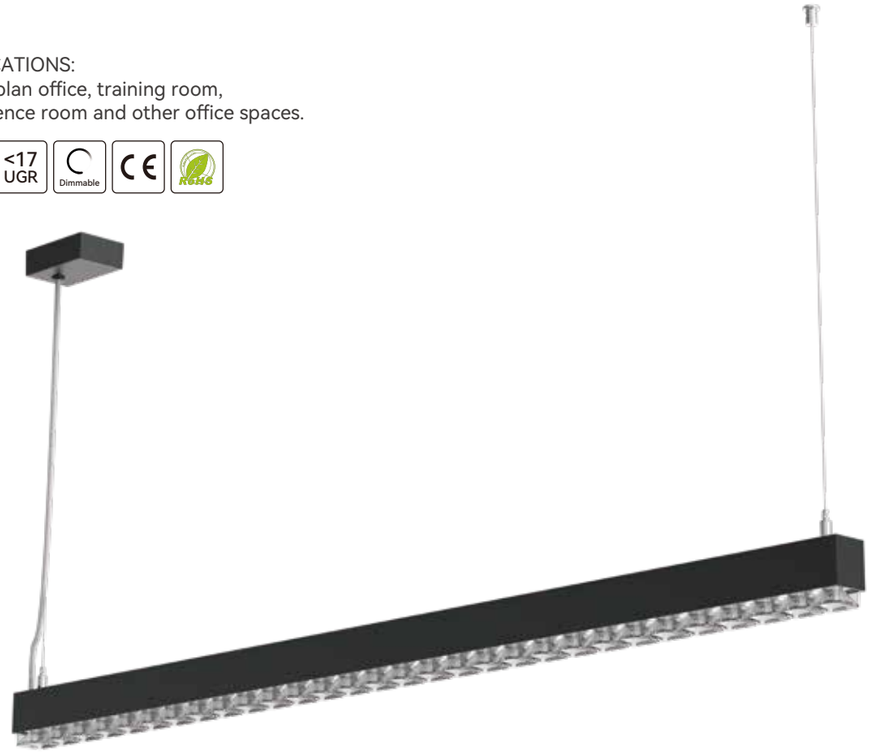

- Up to 160 lm/W for greater energy savings.
- Anti glare lens solution with side micro-light, low glare and high visual comfort
- UGR < 17， compliant with professional lighting design requirements;
- 4pcs LEDs under each lens solution, support for CCT switchable, symmetrical and well-mixed lighting effect;






PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	9600lm	10700lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑115° / 70°↓	
UGR	<17	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BDAP1-1206024-NN	↑5450lm/4150lm↓	↑36W/24W↓	On/off
BDAP1-1206024-DN	↑5450lm/4150lm↓	↑36W/24W↓	DALI dimming
BDAP1-1507028-NN	↑6000lm/4700lm↓	↑42W/28W↓	On/off
BDAP1-1507028-DN	↑6000lm/4700lm↓	↑42W/W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION






Equo-P


NEW

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <16 UGR | Dimmable | CE | RoHS

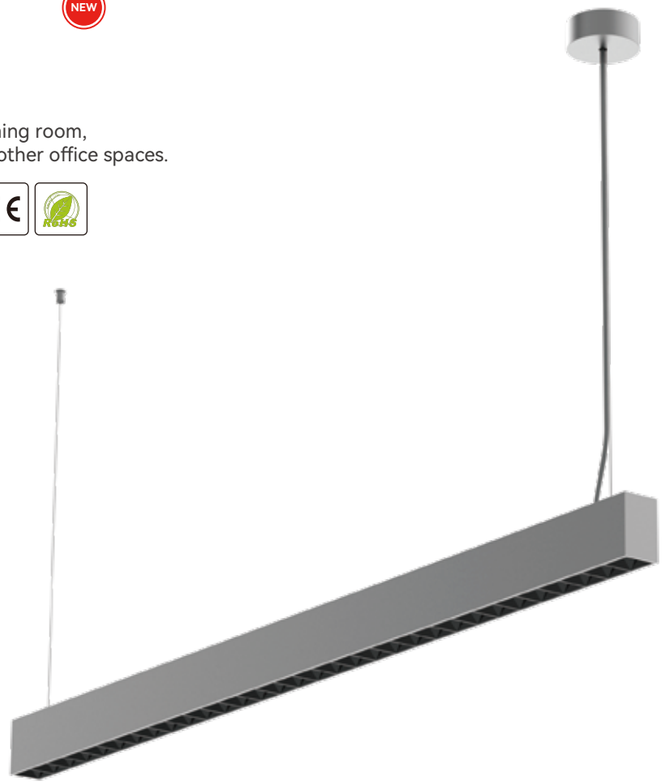

- Indirect light with 155° wide beam angle lens for uniform illumination
- Direct light with 70° wide beam angle lens and anti-glare shield design, symmetrical and well-mixed lighting effect
- CCT switchable and Wattage switchable
- Seamless linkable design with no light leakage



PRODUCT PARAMETERS

Luminaire Wattage	60W(Power switchable)	70W(Power switchable)
Luminous Flux	7800lm	9100lm
CCT	3000K/4000K(CCT switchable)	
CRI	>80	
Beam Angle	↑155° / 70°↓	
UGR	<16	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BEQP-1206024-NN	↑4700lm/3100lm↓	↑36W/24W↓	On/off
BEQP-1206024-DN	↑4700lm/3100lm↓	↑36W/24W↓	DALI dimming
BEQP-1507028-NN	↑5500lm/3600lm↓	↑42W/28W↓	On/off
BEQP-1507028-DN	↑5500lm/3600lm↓	↑42W/28W↓	DALI dimming

SIZE






MAYE Pro-PS

NEW


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

160 LM/W | <19 UGR | Dimmable

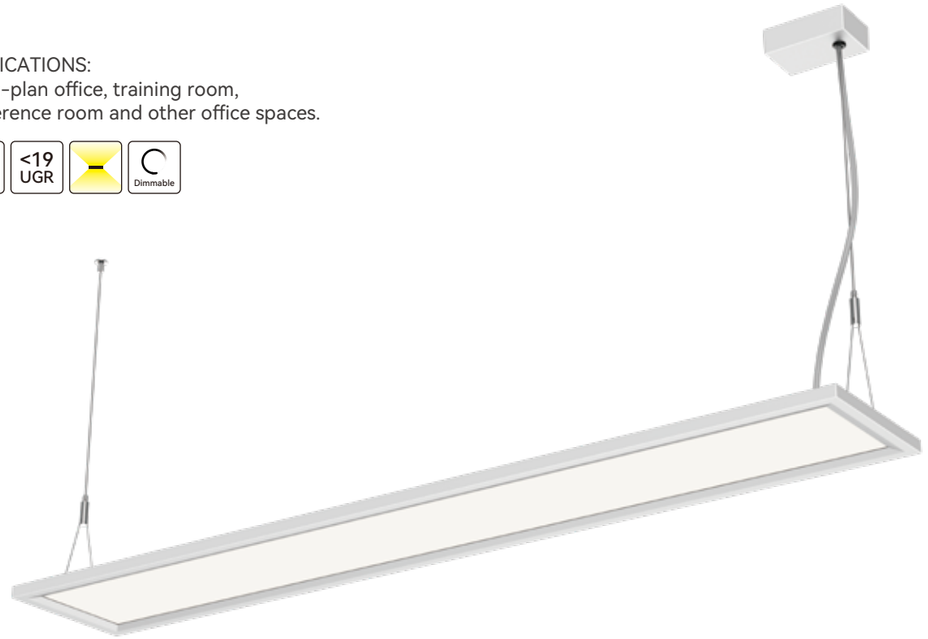



Large light-distribution area for direct light 15mm ultra-thin edge design



Structural polarization design for indirect light



Support linkable luminaires


PRODUCT PARAMETERS

Luminaire Wattage	60W	60W	70W
Luminous Flux	8660lm	9600lm	11200lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑110° / 80°↓		
UGR	<16		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL


Part No.	LM	Power	Function
BMPP-1206030-NN	↑5080lm/3770lm↓	↑30W/30W↓	On/off
BMPP-1206030-DN	↑5080lm/3770lm↓	↑30W/30W↓	DALI dimming
BMPP-1206020-NN	↑7180lm/2420lm↓	↑40W/20W↓	On/off
BMPP-1206020-DN	↑7180lm/2420lm↓	↑40W/20W↓	DALI dimming
BMPP-1507028-NN	↑7600lm/3600lm↓	↑42W/28W↓	On/off
BMPP-1507028-DN	↑7600lm/3600lm↓	↑42W/28W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



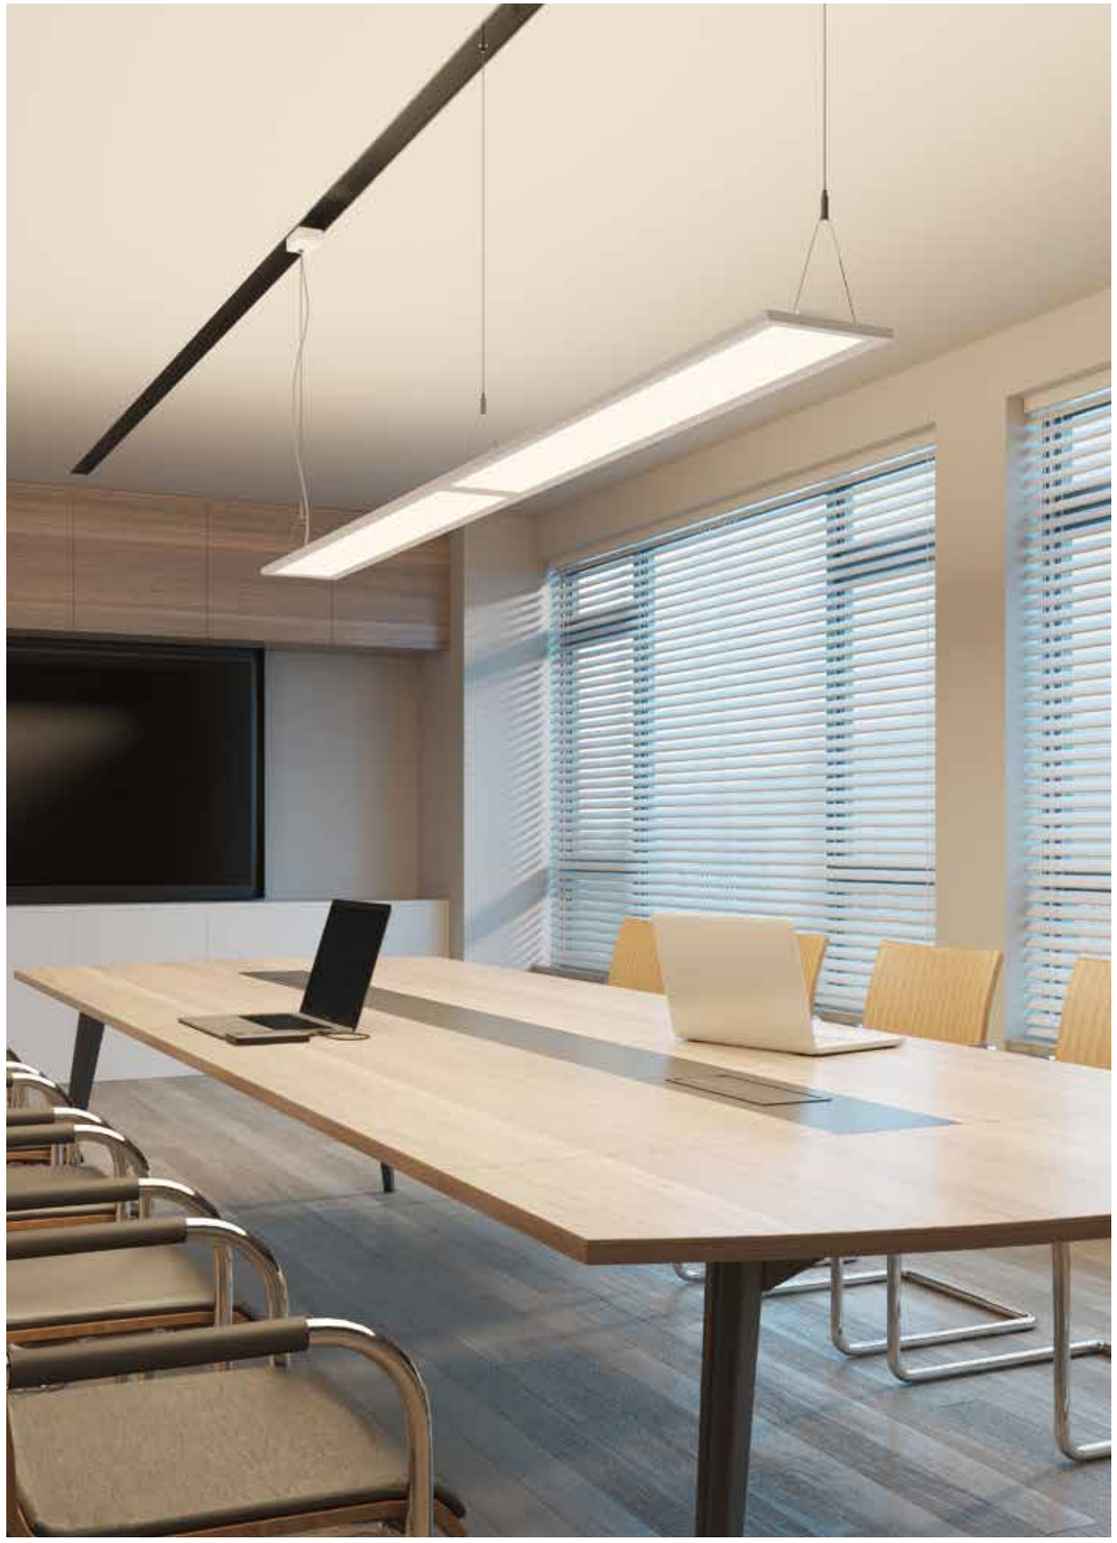

ROMAN-P0 NEW

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <15 UGR | Dimmable | CE | RoHS



- Simple design style, rich texture
- Light efficiency up to 148lm/W
- Support DALI and 1-10V dimming






PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	8910lm	10400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑115° / 60°↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BROP0-1206024-NN	↑6010lm/2900lm↓	↑36W/24W↓	On/off
BROP0-1206024-VN	↑6010lm/2900lm↓	↑36W/24W↓	1-10V dimming
BROP0-1206024-DN	↑6010lm/2900lm↓	↑36W/24W↓	DALI dimming
BROP0-1507028-NN	↑7000lm/3400lm↓	↑42W/28W↓	On/off
BROP0-1507028-VN	↑7000lm/3400lm↓	↑42W/28W↓	1-10V dimming
BROP0-1507028-DN	↑7000lm/3400lm↓	↑42W/28W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION





ROMAN-P1 NEW

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | <6 UGR | Dimmable | CE | RoHS



- Simple design style, rich texture
- Light efficiency up to 150lm/W
- Support DALI and 1-10V dimming








PRODUCT MODEL

Part No.	LM	Power	Function
BROP1-6506024-NN	↑5900lm/3100lm↓	↑36W/24W↓	On/off
BROP1-6506024-VN	↑5900lm/3100lm↓	↑36W/24W↓	1-10V dimming
BROP1-6506024-DN	↑5900lm/3100lm↓	↑36W/24W↓	DALI dimming
BROP1-9008032-NN	↑7800lm/4200lm↓	↑48W/32W↓	On/off
BROP1-9008032-VN	↑7800lm/4200lm↓	↑48W/32W↓	1-10V dimming
BROP1-9008032-DN	↑7800lm/4200lm↓	↑48W/32W↓	DALI dimming
BROP1-1212048-NN	↑12000lm/6000lm↓	↑72W/48W↓	On/off
BROP1-1212048-VN	↑12000lm/6000lm↓	↑72W/48W↓	1-10V dimming
BROP1-1212048-DN	↑12000lm/6000lm↓	↑72W/48W↓	DALI dimming


PRODUCT PARAMETERS

Luminaire Wattage	60W	80W	120W
Luminous Flux	9000lm	12000lm	18000lm
CCT	3000K / 4000K / 6000K		
CRI	>80		
Beam Angle	↑115° / 60°↓		
UGR	<6		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / 1-10V dimming / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		

SIZE



LIGHT DISTRIBUTION





EZY-P NEW

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Individual uplight module design, flexible and easy to manage inventory
- CCT switchable and Wattage switchable
- Up to 140 lm/W for greater energy savings.
- 350/450/600mm diameter available
- Pole-pendant / wire-pendant optional







LIGHT DISTRIBUTION

Luminaire Wattage	18W/ 24W power switchable	30W/ 40W power switchable	48W/ 60W power switchable
Luminous Flux	2500lm/ 3240lm	4000lm/ 5300lm	6720lm/ 8400lm
CCT	3000K / 4000K CCT switchable		
CRI	>80		
UGR	<19/ <22		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL
UGR<19

Part No.	LM	Power	Function
BEZP-3502417-NN-01	↑990lm/ 1510lm↓	18W(↑6W↓/12W↓)	On/off
BEZP-3502417-DN-01	↑1140lm/ 2100lm↓	24W(↑7W/ 17W↓)	DALI dimming
BEZP-4504028-NN-01	↑1250lm/ 2750lm↓	30W(↑9W/ 21W↓)	On/off
BEZP-4504028-DN-01	↑1600lm/ 3700lm↓	40W(↑12W/ 28W↓)	DALI dimming
BEZP-6006042-NN-01	↑1500lm/ 5220lm↓	48W(↑14W/ 34W↓)	On/off
BEZP-6006042-DN-01	↑2400lm/ 6000lm↓	60W(↑18W/ 42W↓)	DALI dimming


PRODUCT MODEL
UGR<22

Part No.	LM	Power	Function
BEZP-3502424-NN-01	2250lm↓/ 3000lm↓	18W↓/ 24W↓	On/off
BEZP-3502424-DN-01			DALI dimming
BEZP-4504040-NN-01	3900lm↓/ 5200lm↓	30W↓/ 40W↓	On/off
BEZP-4504040-DN-01			DALI dimming
BEZP-6006060-NN-01	6480lm↓/ 8100lm↓	48W↓/ 60W↓	On/off
BEZP-6006060-DN-01			DALI dimming

SIZE



LIGHT DISTRIBUTION






KEY-P

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | Dimmable | CE | RoHS

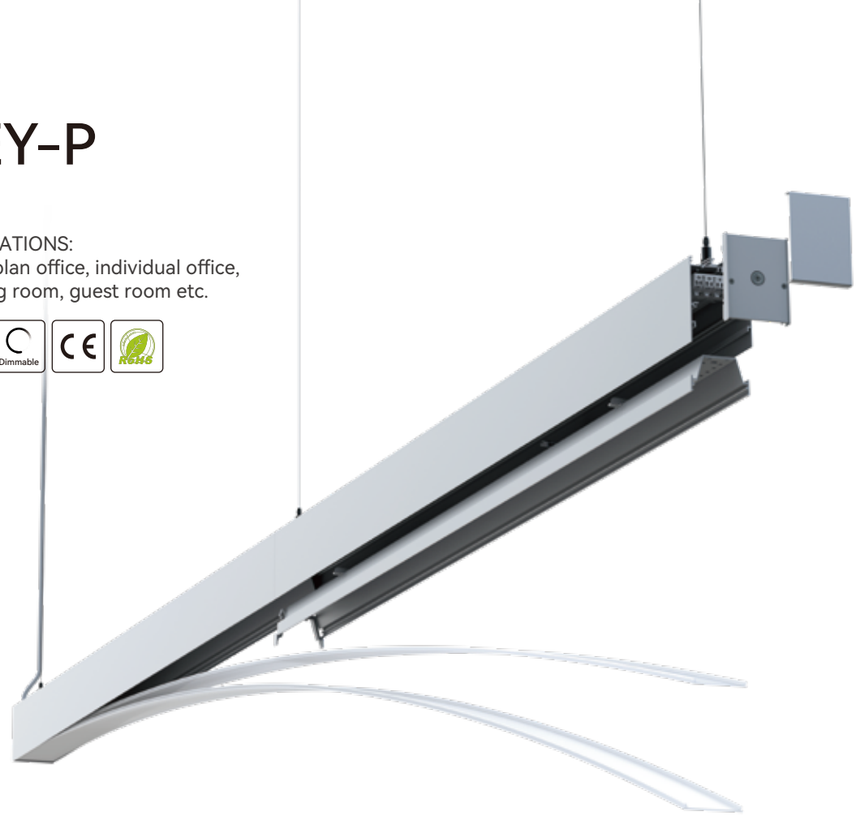



Light efficiency could be 130LM/W


Flexible microprism plate Flexible diffuser

Linkable and no light leakage


PRODUCT PARAMETERS

Luminaire Wattage	30W	40W	50W		60W	
Luminous Flux	3600lm	4800lm	6250lm	6500lm	7500lm	7800lm
CCT	3000K / 4000K / 6000K					
CRI	>80					
Protection Rating	IP20					
Longevity	50,000Hrs L80 B10					
Function	On/off / 1-10V dimming / DALI dimming					
Colours	Silver / White / Black					
Warranty	5 years					

SIZE



LIGHT DISTRIBUTION



PRODUCT MODEL

UGR: <19

Part No.	LM	Power	Function
BKEP-1205015-NN	↑4550lm/1950lm↓	↑35W/15W↓	On/off
BKEP-1205015-VN	↑4550lm/1950lm↓	↑35W/15W↓	1-10V dimming
BKEP-1205015-DN	↑4550lm/1950lm↓	↑35W/15W↓	DALI dimming
BKEP-1506018-NN	↑5460lm/2340lm↓	↑42W/18W↓	On/off
BKEP-1506018-VN	↑5460lm/2340lm↓	↑42W/18W↓	1-10V dimming
BKEP-1506018-DN	↑5460lm/2340lm↓	↑42W/18W↓	DALI dimming

UGR: >19

Part No.	LM	Power	Function
BKEP-1205030-NN	↑2500lm/3750lm↓	↑20W/30W↓	On/off
BKEP-1205030-VN	↑2500lm/3750lm↓	↑20W/30W↓	1-10V dimming
BKEP-1205030-DN	↑2500lm/3750lm↓	↑20W/30W↓	DALI dimming
BKEP-1506036-NN	↑3000lm/4500lm↓	↑24W/36W↓	On/off
BKEP-1506036-VN	↑3000lm/4500lm↓	↑24W/36W↓	1-10V dimming
BKEP-1506036-DN	↑3000lm/4500lm↓	↑24W/36W↓	DALI dimming
BKEP-1203030-NN	3600lm↓	30W↓	On/off
BKEP-1203030-VN	3600lm↓	30W↓	1-10V dimming
BKEP-1203030-DN	3600lm↓	30W↓	DALI dimming
BKEP-1504040-NN	4800lm↓	40W↓	On/off
BKEP-1504040-VN	4800lm↓	40W↓	1-10V dimming
BKEP-1504040-DN	4800lm↓	40W↓	DALI dimming







FREE-P


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <19 UGR | Dimmable | CE | RoHS

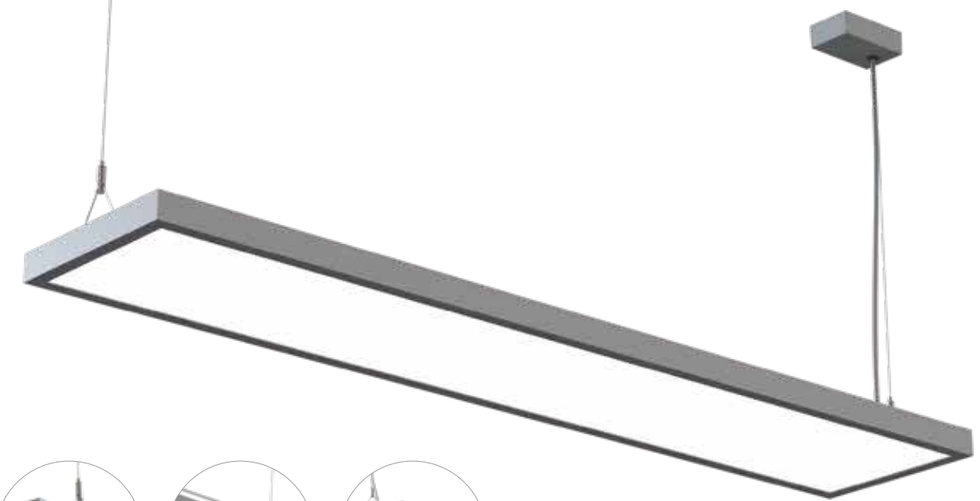



Microprism
UGR<19



Direct and indirect
lighting with impressive
light uniformity



Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6350lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BFRP-1205030-NN	↑2700lm/3650lm↓	↑20W/30W↓	On/off
BFRP-1205030-VN	↑2700lm/3650lm↓	↑20W/30W↓	1-10V dimming
BFRP-1205030-DN	↑2700lm/3650lm↓	↑20W/30W↓	DALI dimming
BFRP-1506036-NN	↑3000lm/4500lm↓	↑24W/36W↓	On/off
BFRP-1506036-VN	↑3000lm/4500lm↓	↑24W/36W↓	1-10V dimming
BFRP-1506036-DN	↑3000lm/4500lm↓	↑24W/36W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION







ROMI-P

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | <18 UGR | Dimmable | CE | RoHS





Microprism
UGR<18



Extremely simple for installation and maintenance



Pole suspension and wire suspension for option


LIGHT DISTRIBUTION

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BROP-3501812-NN	↑500lm/1200lm↓	↑6W/12W↓	On/off
BROP-3501812-VN	↑500lm/1200lm↓	↑6W/12W↓	1-10V dimming
BROP-3501812-DN	↑500lm/1200lm↓	↑6W/12W↓	DALI dimming
BROP-4503021-NN	↑1100lm/2200lm↓	↑9W/21W↓	On/off
BROP-4503021-VN	↑1100lm/2200lm↓	↑9W/21W↓	1-10V dimming
BROP-4503021-DN	↑1100lm/2200lm↓	↑9W/21W↓	DALI dimming
BROP-6004834-NN	↑1960lm/3800lm↓	↑14W/34W↓	On/off
BROP-6004834-VN	↑1960lm/3800lm↓	↑14W/34W↓	1-10V dimming
BROP-6004834-DN	↑1960lm/3800lm↓	↑14W/34W↓	DALI dimming
BROP-9008056-NN	↑3400lm/6200lm↓	↑24W/56W↓	On/off
BROP-9008056-VN	↑3400lm/6200lm↓	↑24W/56W↓	1-10V dimming
BROP-9008056-DN	↑3400lm/6200lm↓	↑24W/56W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION









ELFOO-P


APPLICATIONS:
Open-plan office, individual office,
cafetoria, training room, classroom, etc.

IP20 | <15 UGR | Dimmable | CE | RoHS

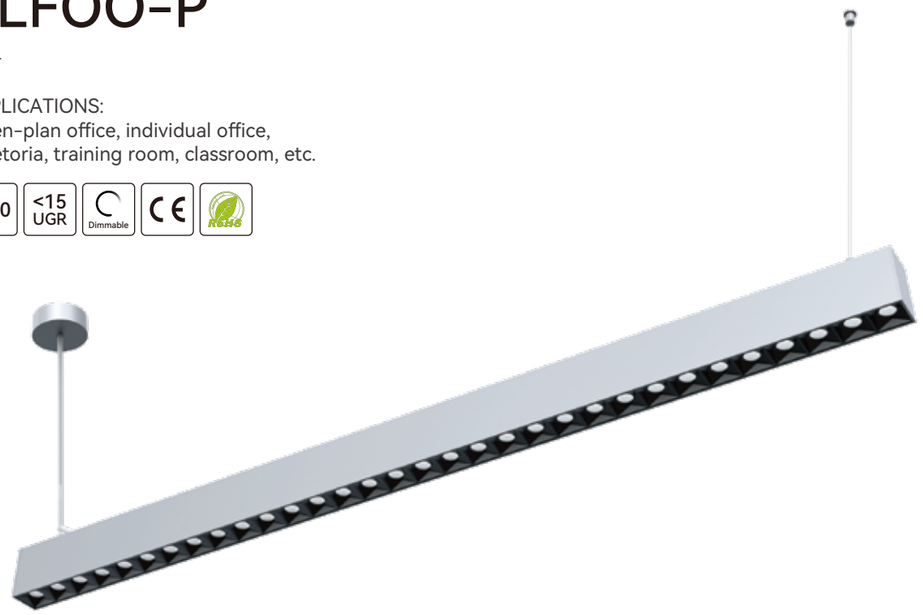




Wide beam angle with professional glare control design, UGR<15



140° upward light output to provide comfortable lighting for the space



No gap and no light come out from connection parts when linked together


PRODUCT PARAMETERS

Luminaire Wattage	60W	70W
Luminous Flux	6300lm	7400lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑140° / 75°↓ or ↑140° / 50°↓	
UGR	<15	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFP-1206024-NN	↑3500lm/2800lm↓	↑36W/24W↓	On/off
BEFP-1206024-VN	↑3500lm/2800lm↓	↑36W/24W↓	1-10V dimming
BEFP-1206024-DN	↑3500lm/2800lm↓	↑36W/24W↓	DALI dimming
BEFP-1507028-NN	↑4100lm/3300lm↓	↑42W/28W↓	On/off
BEFP-1507028-VN	↑4100lm/3300lm↓	↑42W/28W↓	1-10V dimming
BEFP-1507028-DN	↑4100lm/3300lm↓	↑42W/28W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION









LENO-P2

APPLICATIONS:
Open-plan office, individual office,
small meeting room, reception, etc.

IP20 | <6 UGR | Dimmable | CE | RoHS

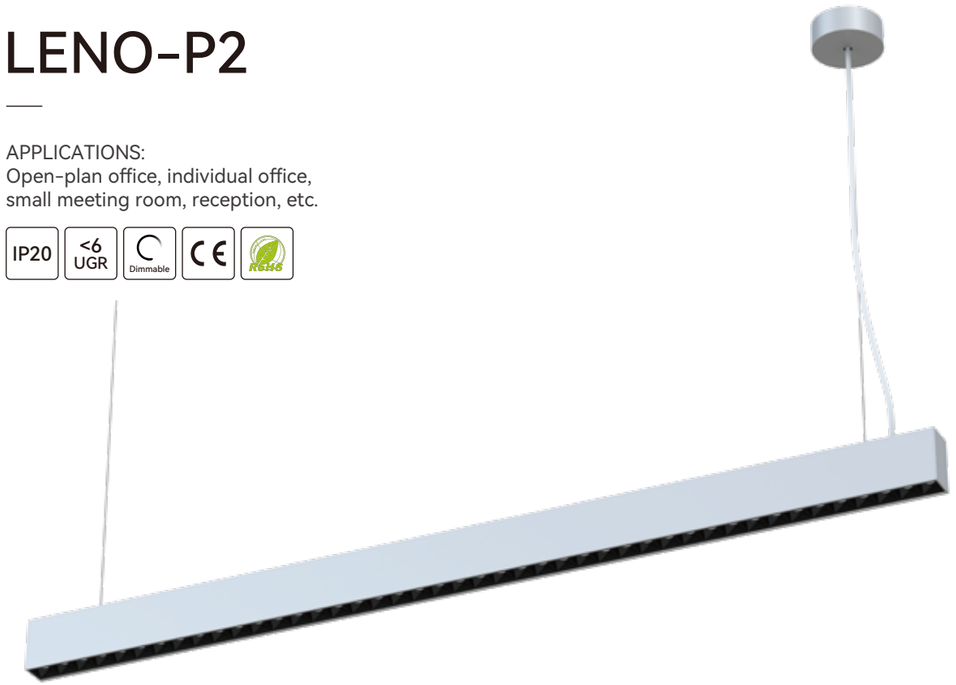




Micro reflector design
UGR<6



Linkable design



Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	6250lm	7500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	↑115° / 50°↓	
UGR	<6	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLEP2-1205025-NN	↑3350lm/2900lm↓	↑25W/25W↓	On/off
BLEP2-1205025-VN	↑3350lm/2900lm↓	↑25W/25W↓	1-10V dimming
BLEP2-1205025-DN	↑3350lm/2900lm↓	↑25W/25W↓	DALI dimming
BLEP2-1506030-NN	↑4000lm/3500lm↓	↑30W/30W↓	On/off
BLEP2-1506030-VN	↑4000lm/3500lm↓	↑30W/30W↓	1-10V dimming
BLEP2-1506030-DN	↑4000lm/3500lm↓	↑30W/30W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION









LICON-P


APPLICATIONS:
Open-plan office, individual office, meeting room, guestroom etc.

IP20 | <21 UGR | Dimmable | CE | RoHS

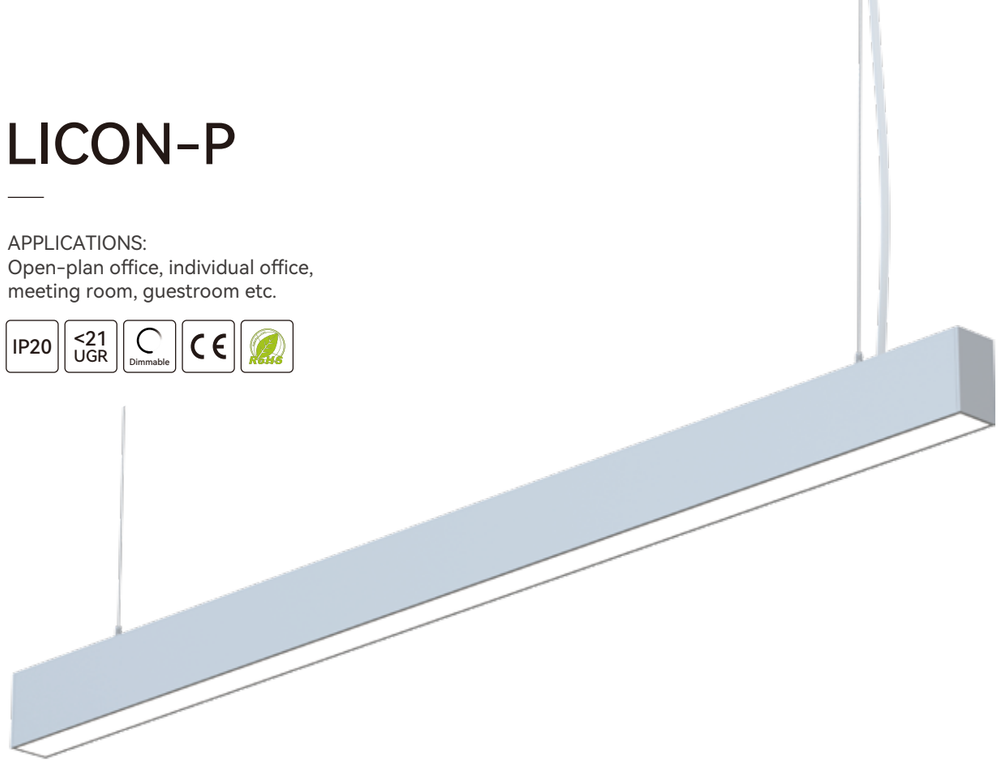

- Simple and rich textured design
- Support DALI and 1-10V dimming
- Simple, easy and quick installation






PRODUCT PARAMETERS

Luminaire Wattage	40W	48W	50W	60W
Luminous Flux	3600lm	5300lm	4500lm	6600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<21			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL


Part No.	LM	Power	Function
BLIP-1204832-NN	↑2400lm/2900lm↓	↑16W/32W↓	On/off
BLIP-1204832-VN	↑2400lm/2900lm↓	↑16W/32W↓	1-10V dimming
BLIP-1204832-DN	↑2400lm/2900lm↓	↑16W/32W↓	DALI dimming
BLIP-1506040-NN	↑3000lm/3600lm↓	↑20W/40W↓	On/off
BLIP-1506040-VN	↑3000lm/3600lm↓	↑20W/40W↓	1-10V dimming
BLIP-1506040-DN	↑3000lm/3600lm↓	↑20W/40W↓	DALI dimming
BLIP-1204040-NN	3600lm↓	40W↓	On/off
BLIP-1204040-VN	3600lm↓	40W↓	1-10V dimming
BLIP-1204040-DN	3600lm↓	40W↓	DALI dimming
BLIP-1505050-NN	4500lm↓	50W↓	On/off
BLIP-1505050-VN	4500lm↓	50W↓	1-10V dimming
BLIP-1505050-DN	4500lm↓	50W↓	DALI dimming


SIZE



LIGHT DISTRIBUTION



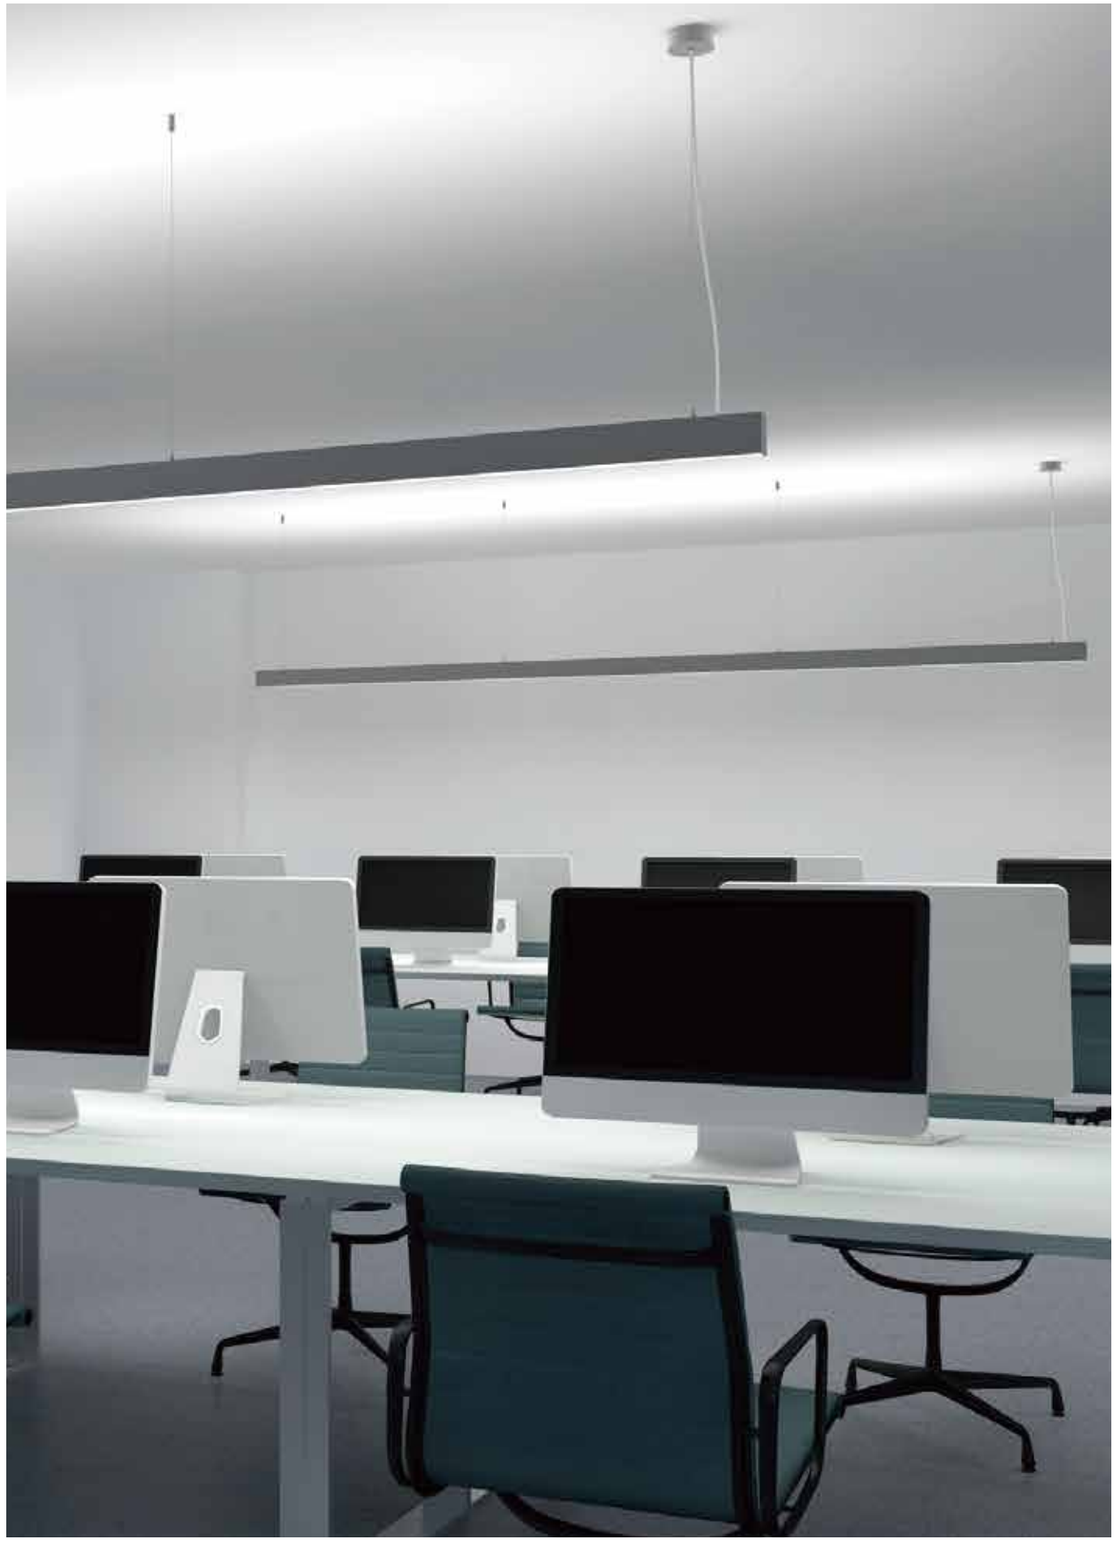

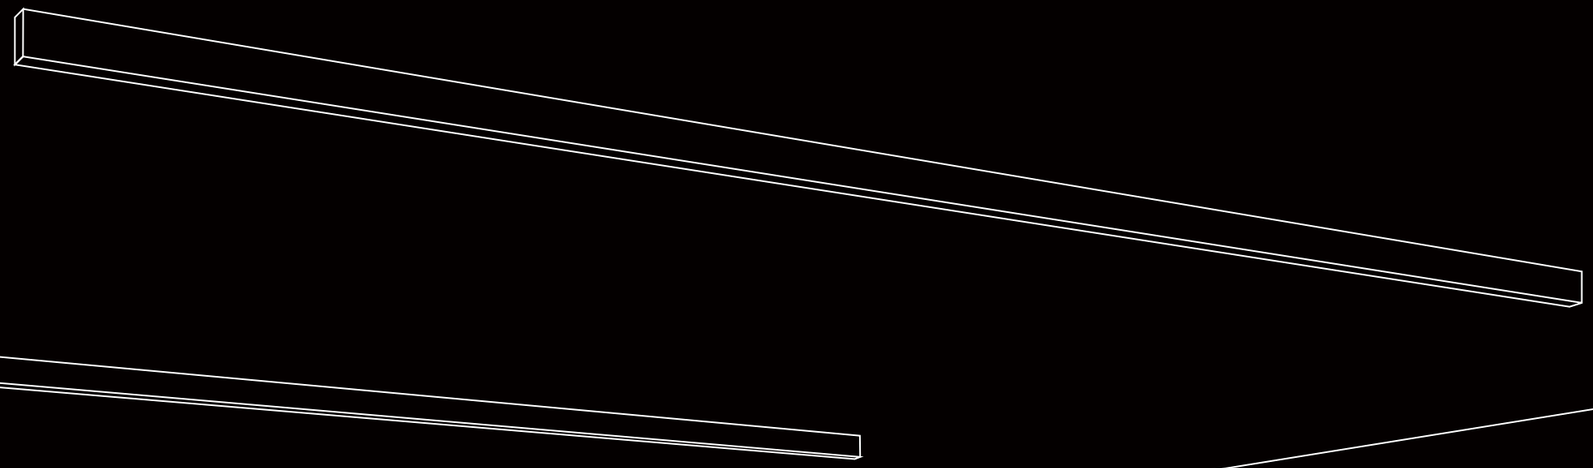

04

SURFACE MOUNTED LUMINAIRES

APPLICATIONS:
Open-plan office, reception, training room, cafeteria, etc.



SURFACE MOUNTED LUMINAIRES



EZY-C



KEY-C




FREE-C



ROMI-C



ELFOO-C



ELFOO-C3



LICON-C

	EZY-C	KEY-C	FREE-C	ROMI-C	ELFOO-C	ELFOO-C3	LICON-C
Luminaire Wattage	18W/ 24W power switchable 30W/ 40W power switchable 48W/ 60W power switchable	40W/ 50W	50W/ 60W	18W/ 30W/ 48W/ 80W	30W/ 35W	8W/ 18W	40W/ 50W
Luminous Flux	2500lm/ 3240lm 4000lm/ 5300lm 6720lm/ 8400lm	4800lm/ 6000lm	5200lm/ 6300lm	1700lm/ 3300lm/ 5760lm/ 9600lm	3200lm/ 3600lm	850lm/ 1900lm	3600lm/ 4500lm
UGR	<19/ <22	<27	<19	<18	<18	<14(35°) / <17(65°)	<21
optics	90°	90°	80°	95°	80°	35° / 65°	80°
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours							

EZY-C NEW

APPLICATIONS:
Open-plan office, individual office, meeting room, guest room etc.

IP20 | <19 UGR | Dimmable | CE | RoHS



- Individual uplight module design, flexible and easy to manage inventory.
- CCT switchable and Wattage switchable.
- Up to 140 lm/W for greater energy savings.
- 350/450/600mm diameter available.





LIGHT DISTRIBUTION

Luminaire Wattage	18W/ 24W power switchable	30W/ 40W power switchable	48W/ 60W power switchable
Luminous Flux	2500lm/ 3240lm	4000lm/ 5300lm	6720lm/ 8400lm
CCT	3000K / 4000K CCT switchable		
CRI	>80		
UGR	<19/ <22		
Protection Rating	IP20		
Longevity	50,000Hrs L80 B10		
Function	On/off / DALI dimming		
Colours	Silver / White / Black		
Warranty	5 years		


PRODUCT MODEL
UGR<19

Part No.	LM	Power	Function
BEZC-3502417-NN-01	↑990lm/ 1510lm↓	18W(↑6W/12W↓)	On/off
BEZC-3502417-DN-01	↑1140lm/ 2100lm↓	24W(↑7W/ 17W↓)	DALI dimming
BEZC-4504028-NN-01	↑1250lm/ 2750lm↓	30W(↑9W/ 21W↓)	On/off
BEZC-4504028-DN-01	↑1600lm/ 3700lm↓	40W(↑12W/ 28W↓)	DALI dimming
BEZC-6006042-NN-01	↑1500lm/ 5220lm↓	48W(↑14W/ 34W↓)	On/off
BEZC-6006042-DN-01	↑2400lm/ 6000lm↓	60W(↑18W/ 42W↓)	DALI dimming


PRODUCT MODEL
UGR<22

Part No.	LM	Power	Function
BEZC-3502424-NN-01	2250lm↓/ 3000lm↓	18W↓/ 24W↓	On/off
BEZC-3502424-DN-01			DALI dimming
BEZC-4504040-NN-01	3900lm↓/ 5200lm↓	30W↓/ 40W↓	On/off
BEZC-4504040-DN-01			DALI dimming
BEZC-6006060-NN-01	6480lm↓/ 8100lm↓	48W↓/ 60W↓	On/off
BEZC-6006060-DN-01			DALI dimming

SIZE



LIGHT DISTRIBUTION






KEY-C NEW

APPLICATIONS:
Open-plan office, reception room, training room, cafeteria, etc.

IP20 | Dimmable | CE | RoHS





Light efficiency could be 120LM/W



Flexible microprism plate



Linkable and no light leakage


PRODUCT PARAMETERS


Luminaire Wattage	40W	50W
Luminous Flux	4800lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL


Part No.	LM	Power	Function
BKEC-1204040-NN	4800lm	40W	On/off
BKEC-1204040-VN	4800lm	40W	1-10V dimming
BKEC-1204040-DN	4800lm	40W	DALI dimming
BKEC-1505050-NN	6000lm	50W	On/off
BKEC-1505050-VN	6000lm	50W	1-10V dimming
BKEC-1505050-DN	6000lm	50W	DALI dimming

SIZE








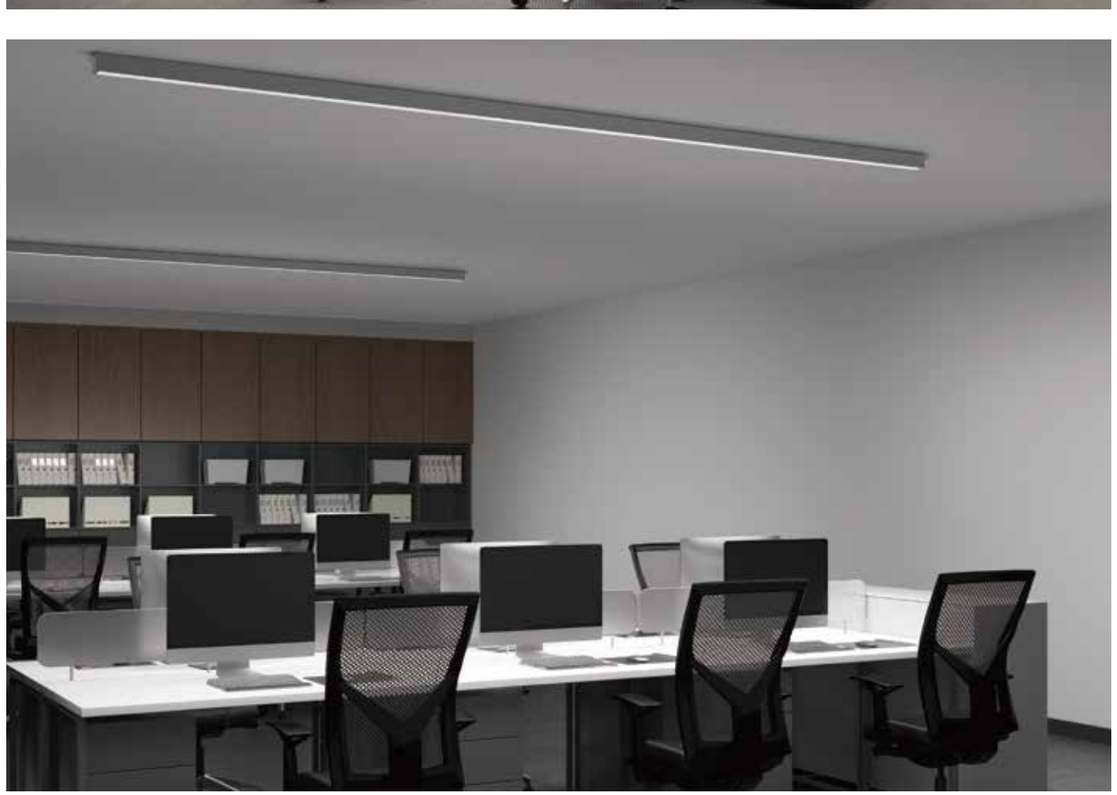

FREE-C


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <19 UGR | Dimmable | CE | RoHS

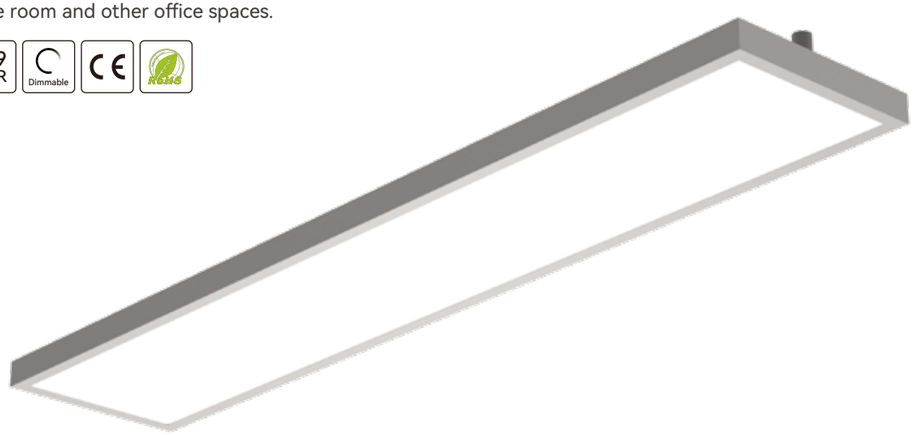



Microprism
UGR<19



Direct and Indirect
lighting with impressive
light uniformity



Support DALI and
1-10V dimming


PRODUCT PARAMETERS

Luminaire Wattage	50W	60W
Luminous Flux	5200lm	6300lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	Function
BFRC-1205040-NN	↑1300lm/3900lm↓	↑10W / 40W↓	On/off
BFRC-1205040-VN	↑1300lm/3900lm↓	↑10W / 40W↓	1-10V dimming
BFRC-1205040-DN	↑1300lm/3900lm↓	↑10W / 40W↓	DALI dimming
BFRC-1506048-NN	↑1500lm/4800lm↓	↑12W / 48W↓	On/off
BFRC-1506048-VN	↑1500lm/4800lm↓	↑12W / 48W↓	1-10V dimming
BFRC-1506048-DN	↑1500lm/4800lm↓	↑12W / 48W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION



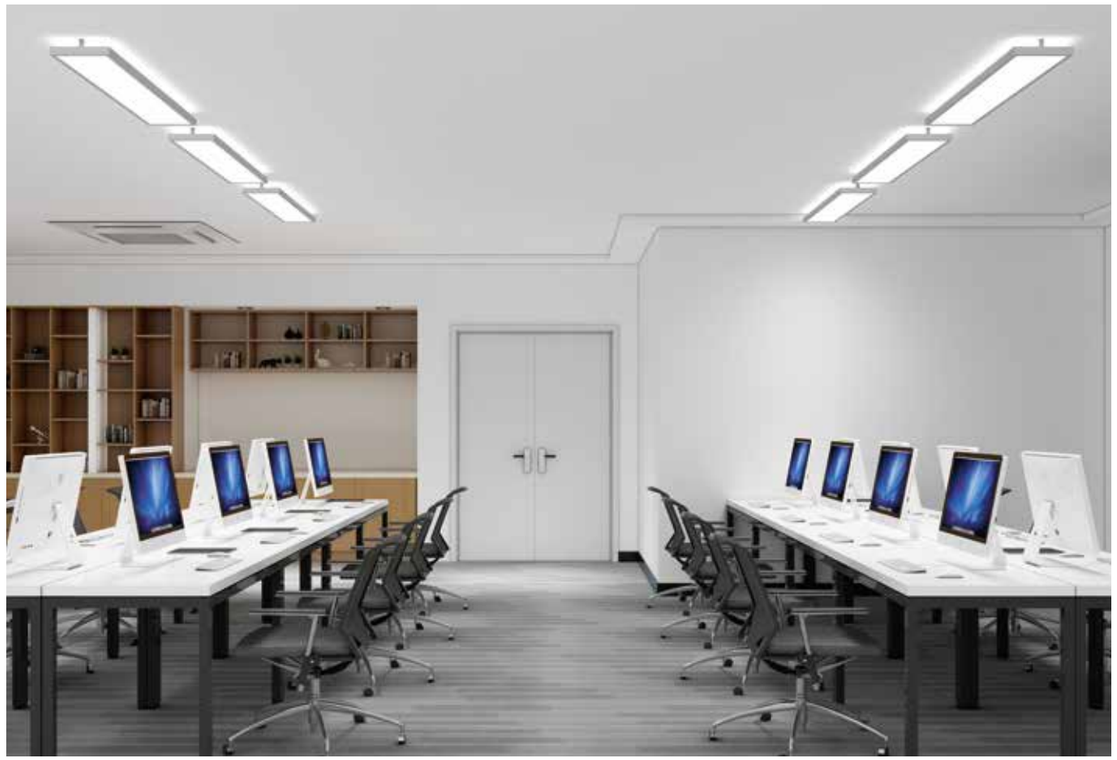




ROMI-C

APPLICATIONS:
Open-plan office, individual office, cafeteria, corridors, break-out area, classroom, etc.

IP20 | <18 UGR | Dimmable | CE | RoHS

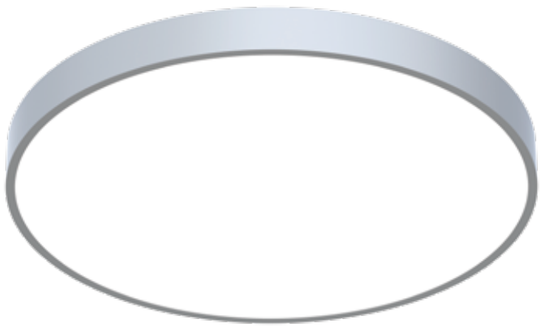

- Microprism, UGR<18
- Extremely simple for installation and maintenance
- Come with several size Ø350 / Ø450 / Ø600 / Ø900




PRODUCT PARAMETERS

Luminaire Wattage	18W	30W	48W	80W
Luminous Flux	1700lm	3300lm	5760lm	9600lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<18			
Protection Rating	IP20			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			


PRODUCT MODEL

Part No.	LM	Power	Function
BROC-3501812-NN	↑500lm/1200lm↓	↑6W/12W↓	On/off
BROC-3501812-VN	↑500lm/1200lm↓	↑6W/12W↓	1-10V dimming
BROC-3501812-DN	↑500lm/1200lm↓	↑6W/12W↓	DALI dimming
BROC-4503021-NN	↑1100lm/2200lm↓	↑9W/21W↓	On/off
BROC-4503021-VN	↑1100lm/2200lm↓	↑9W/21W↓	1-10V dimming
BROC-4503021-DN	↑1100lm/2200lm↓	↑9W/21W↓	DALI dimming
BROC-6004834-NN	↑1960lm/3800lm↓	↑14W/34W↓	On/off
BROC-6004834-VN	↑1960lm/3800lm↓	↑14W/34W↓	1-10V dimming
BROC-6004834-DN	↑1960lm/3800lm↓	↑14W/34W↓	DALI dimming
BROC-9008056-NN	↑3400lm/6200lm↓	↑24W/56W↓	On/off
BROC-9008056-VN	↑3400lm/6200lm↓	↑24W/56W↓	1-10V dimming
BROC-9008056-DN	↑3400lm/6200lm↓	↑24W/56W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION








ELFOO-C


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <18 UGR | Dimmable | CE | RoHS



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together






PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	80°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFC-1203030-NN	3200lm	30W	On/off
BEFC-1203030-VN	3200lm	30W	1-10V dimming
BEFC-1203030-DN	3200lm	30W	DALI dimming
BEFC-1503535-NN	3600lm	35W	On/off
BEFC-1503535-VN	3600lm	35W	1-10V dimming
BEFC-1503535-DN	3600lm	35W	DALI dimming

SIZE



LIGHT DISTRIBUTION








ELFOO-C3


APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <17 UGR | Dimmable | CE | RoHS



- Push-in and push-out structure, easy for installation and maintenance
- Perfect glare control, low UGR
- Support DALI and 1-10V dimming






PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<14(35°) / <17(65°)	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFK-1200808-NN	850lm	8W	On/off
BEFK-1200808-VN	850lm	8W	1-10V dimming
BEFK-1200808-DN	850lm	8W	DALI dimming
BEFK-1201818-NN	1900lm	18W	On/off
BEFK-1201818-VN	1900lm	18W	1-10V dimming
BEFK-1201818-DN	1900lm	18W	DALI dimming

SIZE



LIGHT DISTRIBUTION





LICON-C

APPLICATIONS:
Open-plan office, training room,
conference room and other office spaces.

IP20 | <21 UGR | Dimmable | CE | RoHS





Simple and
delicate design



Easy for maintenance



Simple, easy and
quick installation


PRODUCT PARAMETERS

Luminaire Wattage	40W	50W
Luminous Flux	3600lm	4500lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<21	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BLIC-1204040-NN	3600lm	40W	On/off
BLIC-1204040-VN	3600lm	40W	1-10V dimming
BLIC-1204040-DN	3600lm	40W	DALI dimming
BLIC-1505050-NN	4500lm	50W	On/off
BLIC-1505050-VN	4500lm	50W	1-10V dimming
BLIC-1505050-DN	4500lm	50W	DALI dimming

SIZE



LIGHT DISTRIBUTION








05

RECESSED LUMINAIRES

APPLICATIONS:
Open-plan office, training room,
conference room and classroom, etc.

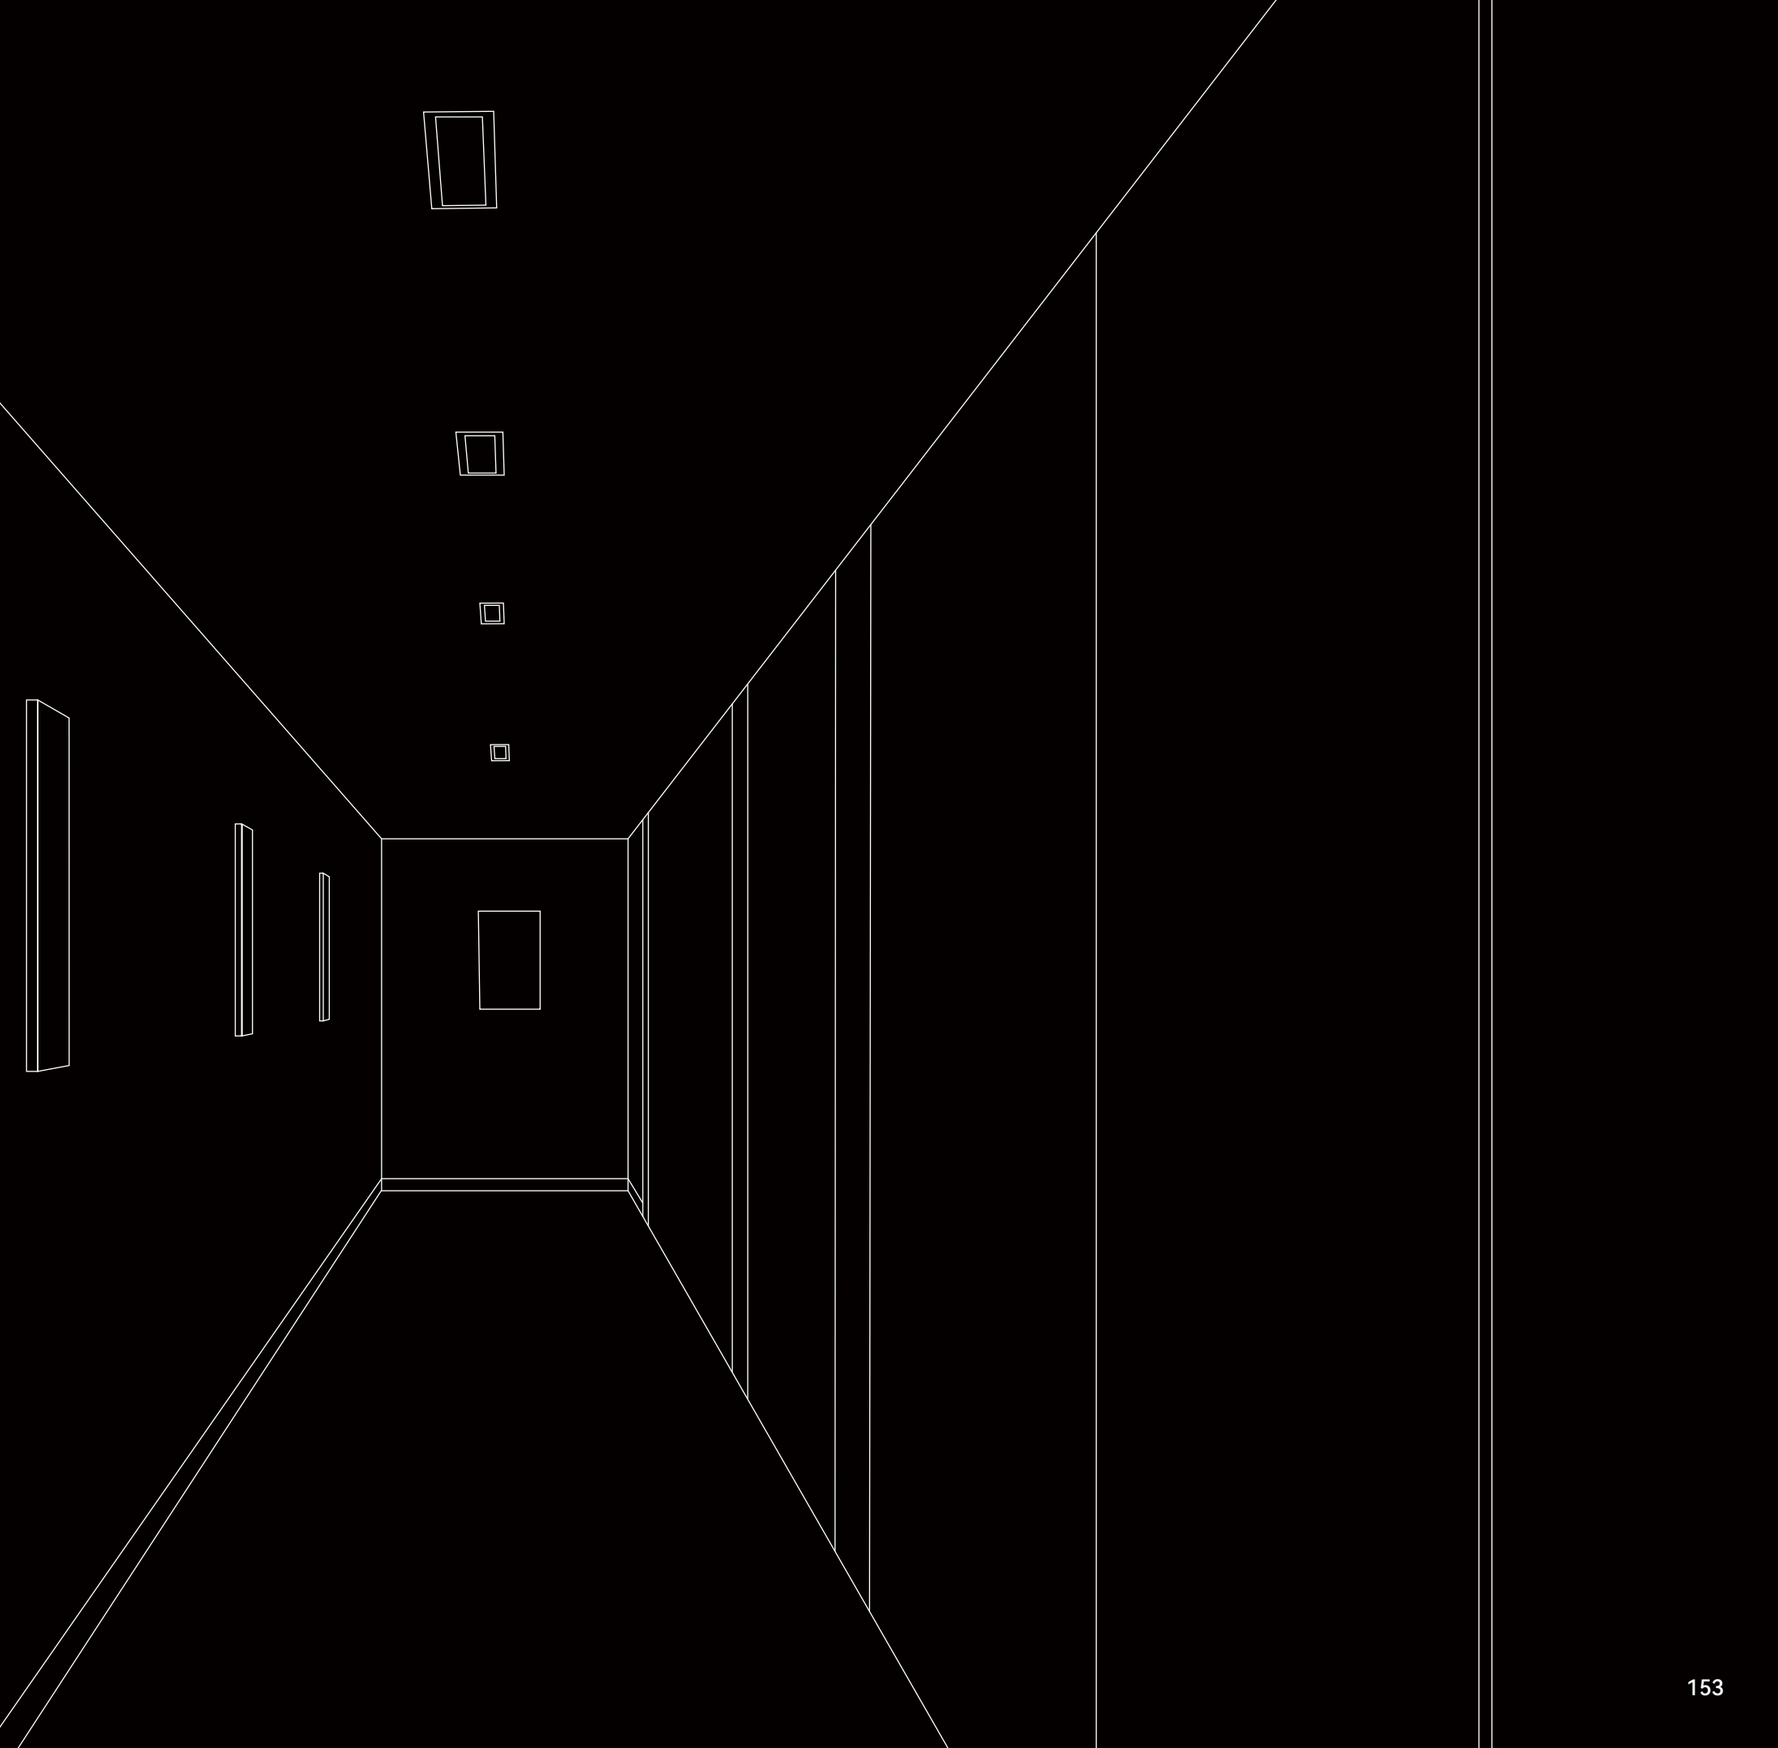

RECESSED LUMINAIRES










	EZY-R	KEY-R	ELFOO-R0	ELFOO-R1	ELFOO-D2	ELFOO-D3	ELFOO-D4	ELFOO-D5
Luminaire Wattage	15W/ 28W/ 30W/ 40W	40W/ 50W	30W/ 35W	30W/ 35W	8W/ 18W	8W/ 18W	6W	12W
Luminous Flux	1950lm/ 3920lm/ 4350lm/ 5890lm	4400lm/ 6000lm	3200lm/ 3600lm	3200lm/ 3600lm	850lm/ 1900lm	850lm/ 1900lm	778lm	1552lm
UGR	<20 / <25	<27	<18	<18	<14(35°) / <17(65°)	<14(35°) / <17(65°)	<18	<18
optics	90°	90°	75°	75°	35°/ 65°	35°/ 65°	55°	55°
CRI	>80	>80	>80	>80	>80	>80	>80	>80
CCT	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K	3000K/ 4000K/ 6000K
Function	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Colours								

EZY-R NEW

APPLICATIONS:
Open-plan office, small office, meeting rooms, cafeterias, foyers and lobbies, corridors, staircases, etc.

IP40 | 145 LM/W | Dimmable | CE | RoHS





Recessed round luminaire available in 462/612mm diameter sizes



Easy Installation and maintenance with complete fixture setup



Suitable for ceiling thickes range of 3-40mm


PRODUCT PARAMETERS


Luminaire Wattage	15W	28W	30W	40W
Luminous Flux	1950lm	3920lm	4350lm	5890lm
CCT	3000K / 4000K / 6000K			
CRI	>80			
UGR	<20		<25	
Protection Rating	IP40			
Longevity	50,000Hrs L80 B10			
Function	On/off / 1-10V dimming / DALI dimming			
Colours	Silver / White / Black			
Warranty	5 years			

PRODUCT MODEL

Part No.	LM	Power	Function
BEZR-4501515-NN-01	1950lm	15W	On/off
BEZR-4501515-DN-01	1950lm	15W	DALI dimming
BEZR-6002828-NN-01	3920lm	28W	On/off
BEZR-6002828-DN-01	3920lm	28W	DALI dimming
BEZR-4503030-NN	4350lm	30W	On/off
BEZR-4503030-DN	4350lm	30W	DALI dimming
BEZR-6004040-NN	5890lm	40W	On/off
BEZR-6004040-DN	5890lm	40W	DALI dimming

SIZE







KEY-R NEW

APPLICATIONS:
Open-plan office, small office, meeting room, reception area, etc.

IP20 | Dimmable | CE | RoHS





Flexible prismatic plate

Support for smart control functions

Linkable design solution


PRODUCT PARAMETERS


Luminaire Wattage	40W	50W
Luminous Flux	4400lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BKEY-1204040-NN	4400lm	40W	On/off
BKEY-1204040-VN	4400lm	40W	1-10V dimming
BKEY-1204040-DN	4400lm	40W	DALI dimming
BKEY-1505050-NN	6000lm	50W	On/off
BKEY-1505050-VN	6000lm	50W	1-10V dimming
BKEY-1505050-DN	6000lm	50W	DALI dimming

SIZE









ELFOO-R0

APPLICATIONS:
Open-plan office, training room conference room and classroom, etc.

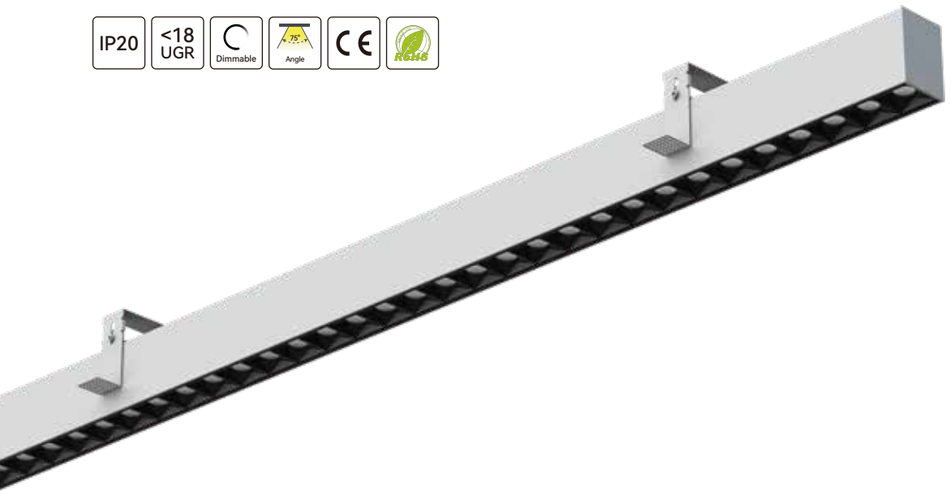

- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from connection parts when linked together
- Support for smart control functions




PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFX-1203030-NN	3200lm	30W	On/off
BEFX-1203030-VN	3200lm	30W	1-10V dimming
BEFX-1203030-DN	3200lm	30W	DALI dimming
BEFX-1503535-NN	3600lm	35W	On/off
BEFX-1503535-VN	3600lm	35W	1-10V dimming
BEFX-1503535-DN	3600lm	35W	DALI dimming

SIZE



LIGHT DISTRIBUTION






ELFOO-R1

APPLICATIONS:
Open-plan office, training room, conference room and classroom, etc.

IP20 | <18 UGR | Dimmable | Angle | CE | RoHS



- Wide beam angle with professional glare control design, UGR<18
- Linkable for linear applications
- No gap and no light come out from the connection parts when linked together
- Support for smart control functions




PRODUCT PARAMETERS

Luminaire Wattage	30W	35W
Luminous Flux	3200lm	3600lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	75°	
UGR	<18	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFY-1203030-NN	3200lm	30W	On/off
BEFY-1203030-VN	3200lm	30W	1-10V dimming
BEFY-1203030-DN	3200lm	30W	DALI dimming
BEFY-1503535-NN	3600lm	35W	On/off
BEFY-1503535-VN	3600lm	35W	1-10V dimming
BEFY-1503535-DN	3600lm	35W	DALI dimming

SIZE



LIGHT DISTRIBUTION






ELFOO-D2

APPLICATIONS:
For office corridor, washroom, staircase, etc.

IP20 | <19 UGR | Dimmable | Angle | CE | RoHS



- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<14(35°) / <17(65°)	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL


Part No.	LM	Power	Function
BEFS-1200808-NN	850lm	8W	On/off
BEFS-1200808-VN	850lm	8W	1-10V dimming
BEFS-1200808-DN	850lm	8W	DALI dimming
BEFS-1201818-NN	1900lm	18W	On/off
BEFS-1201818-VN	1900lm	18W	1-10V dimming
BEFS-1201818-DN	1900lm	18W	DALI dimming

SIZE



LIGHT DISTRIBUTION



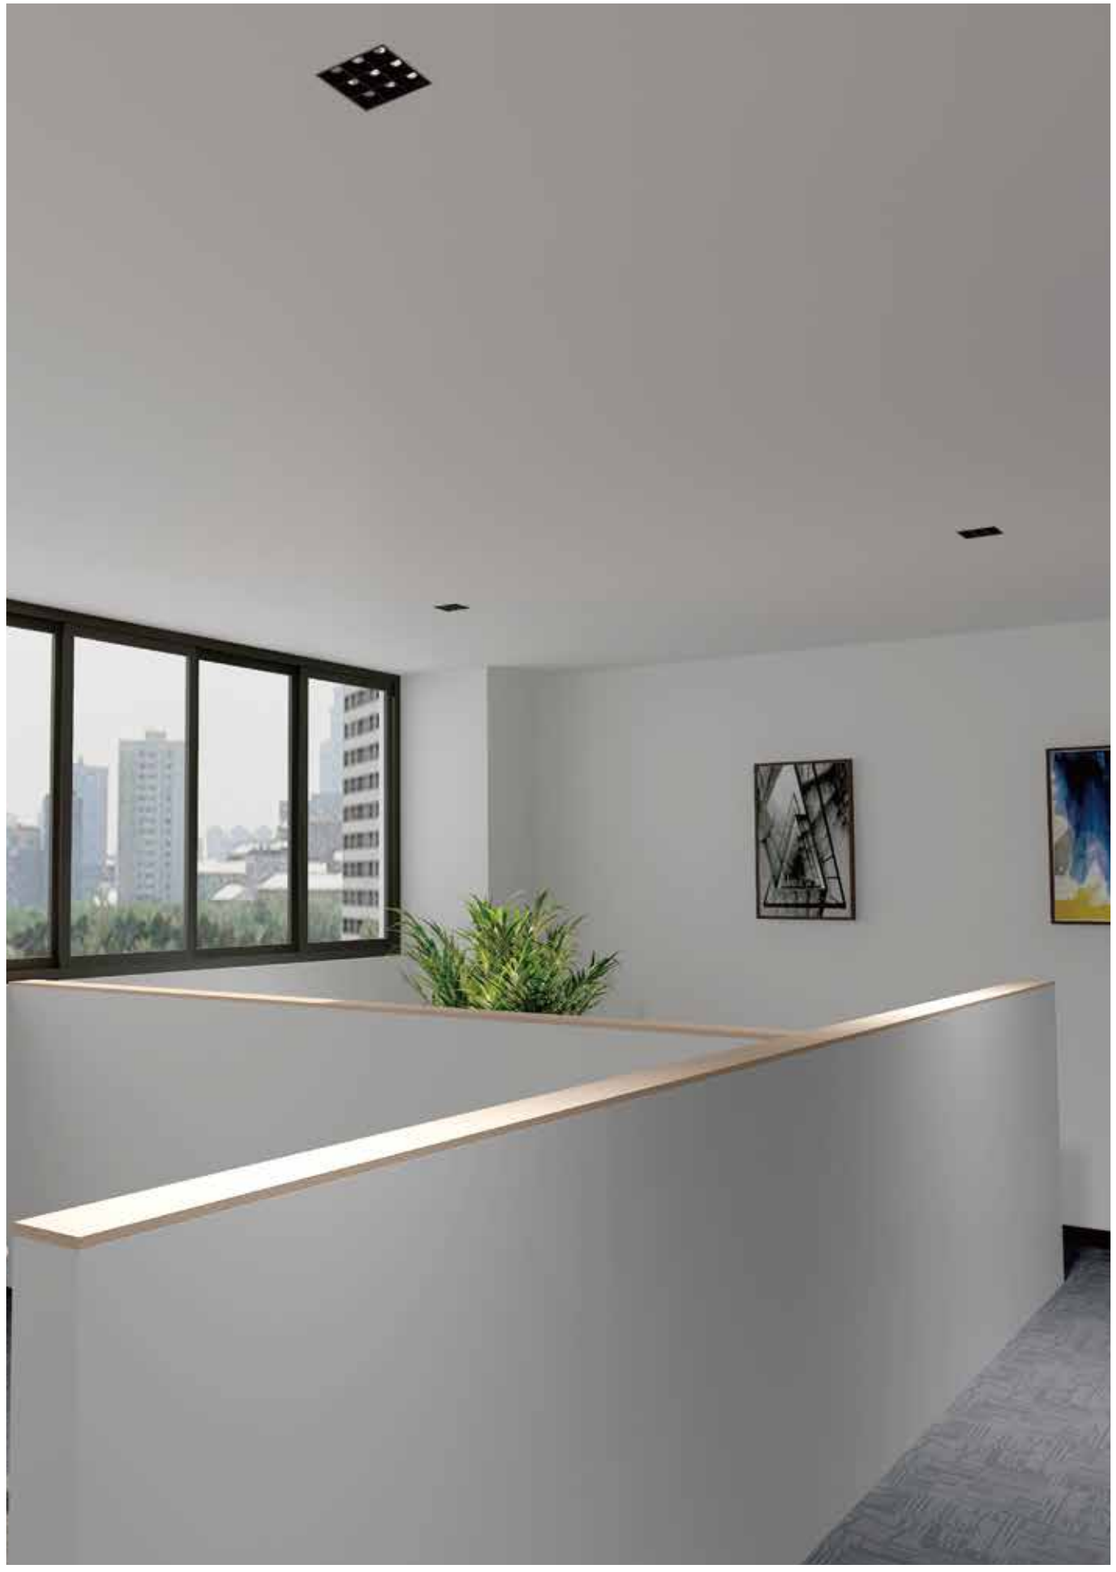


ELFOO-D3

APPLICATIONS:
Open-plan office, training room,
conference room and other office space.

IP20 | <19 UGR | Dimmable | Angle | CE | RoHS



- Push-in-push-out structure, easy for installation and maintenance
- Support DALI and 1-10V dimming
- Perfect glare control, low UGR




PRODUCT PARAMETERS

Luminaire Wattage	8W	18W
Luminous Flux	850lm	1900lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
Beam Angle	35°/65°	
UGR	<14(35°) / <17(65°)	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1400808-NN	850lm	8W	On/off
BEFQ-1400808-VN	850lm	8W	1-10V dimming
BEFQ-1400808-DN	850lm	8W	DALI dimming
BEFQ-1401818-NN	1900lm	18W	On/off
BEFQ-1401818-VN	1900lm	18W	1-10V dimming
BEFQ-1401818-DN	1900lm	18W	DALI dimming

SIZE



LIGHT DISTRIBUTION





ELFOO-D4

APPLICATIONS:
Office corridor, washroom, staircase, etc.

IP20 | <18 UGR | Dimmable | 55° Angle | CE | RoHS



- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


PRODUCT PARAMETERS

Luminaire Wattage	6W
Luminous Flux	778lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BEFQ-1800606-NN	778lm	6W	On/off
BEFQ-1800606-VN	778lm	6W	1-10V dimming
BEFQ-1800606-DN	778lm	6W	DALI dimming

SIZE



LIGHT DISTRIBUTION





ELFOO-D5

APPLICATIONS:
Office corridor, washroom, staircase, etc.

IP20 | <18 UGR | Dimmable | Angle | CE | RoHS



- Perfect glare control, low UGR
- Support DALI and 1-10V dimming
- 5 years warranty


PRODUCT PARAMETERS

Luminaire Wattage	12W
Luminous Flux	1552lm
CCT	3000K / 4000K / 6000K
CRI	>80
Beam Angle	55°
UGR	<18
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL


Part No.	LM	Power	Function
BEFQ-3401212-NN	1552lm	12W	On/off
BEFQ-3401212-VN	1552lm	12W	1-10V dimming
BEFQ-3401212-DN	1552lm	12W	DALI dimming

SIZE



LIGHT DISTRIBUTION



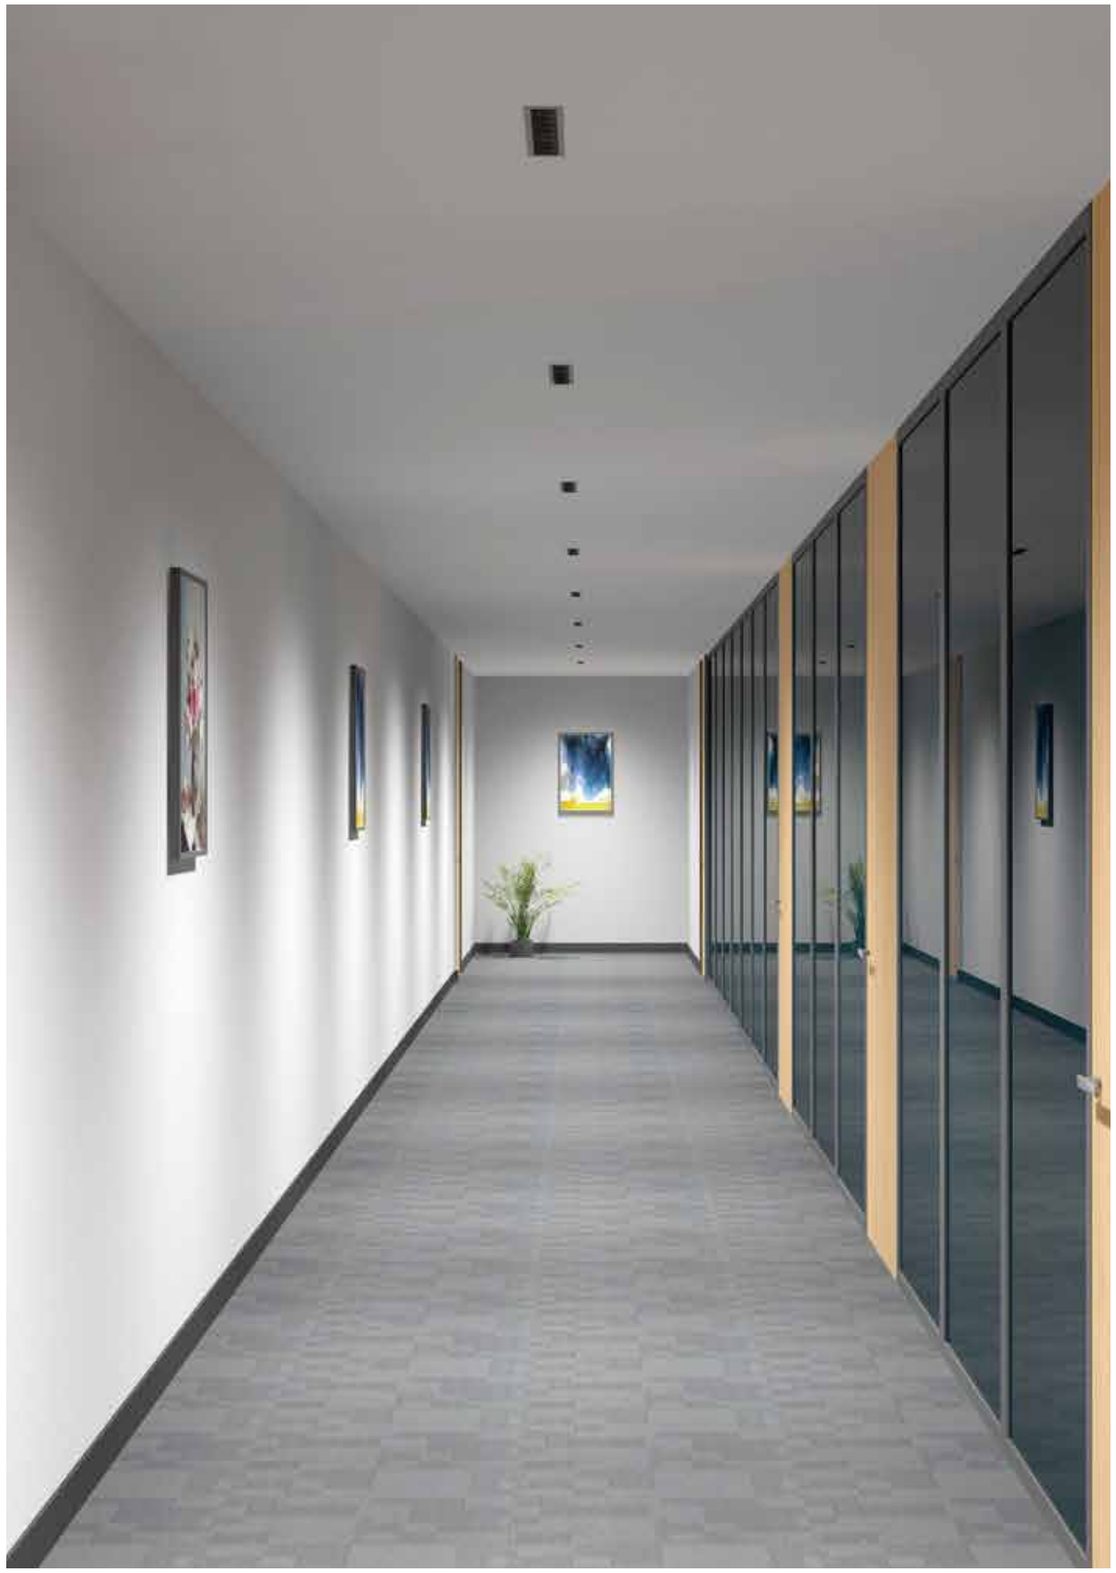

06

WALL MOUNTED LUMINAIRES

APPLICATIONS:
Open-plan office, stairs, corridors and other office space.



WALL MOUNTED LUMINAIRES



MAYE-WS 2.0



POD




NEWA

Luminaire Wattage	30W/ 40W Power switchable	30W/ 50W	30W/ 50W
Luminous Flux	3600lm/ 4800lm	3600lm/ 6000lm	3600lm/ 6000lm
UGR	<19	<10	<19
optics	↑115°/ 85°↓	Asymmetric optics	Asymmetric optics
CRI	>80	>80	>80
CCT	3000K/ 4000K CCT switchable	3000K/ 4000K CCT switchable	3000K/ 4000K/ 6000K
Function	On/off / 1-10V / DALI	On/off / DALI	On/off / 1-10V / DALI
Colours			


MAYE-WS 2.0 NEW

APPLICATIONS:
Open-plan office, stairs, corridors,
lobby, break out area etc.

IP20 | <19 UGR | Dimmable

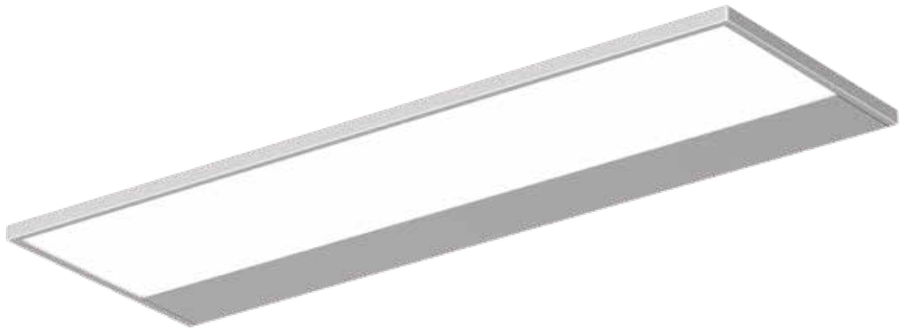

- Slim, minimalist lamp head design
- Single light guide plate achieves 60% indirect lighting & 40% direct lighting for optimal visual comfort
- CCT and Wattage switchable for flexible applications




PRODUCT PARAMETER

Luminaire Wattage	40W (Power switchable)
Luminous Flux	4800 lm
CCT	3000K/4000K (CCT switchable)
CRI	>80
UGR	<19
Protection Rating	IP20
Longevity	50,000Hrs L80 B10
Function	On/off / 1-10V dimming / DALI dimming
Colours	Silver / White / Black
Warranty	5 years


PRODUCT MODEL

Part No.	LM	Power	Function
BMSW-6104020-NN-01	↑2600lm/2200lm↓	↑20W/20W↓	On/off
BMSW-6104020-VN-01	↑2600lm/2200lm↓	↑20W/20W↓	1-10V dimming
BMSW-6104020-DN-01	↑2600lm/2200lm↓	↑20W/20W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION







POD NEW

APPLICATIONS:
Open-plan office, stairs, corridors and other office space.

IP20 | <10 UGR | Dimmable

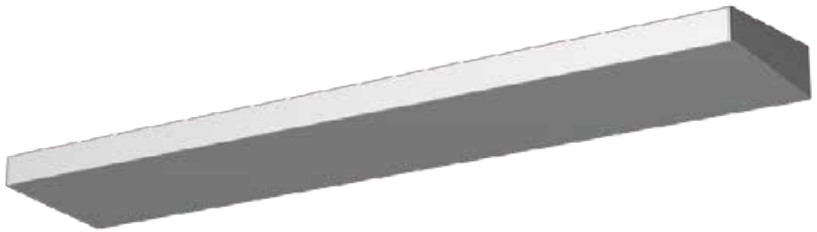




PRODUCT PARAMETERS


Luminaire Wattage	30W	50W
Luminous Flux	3600lm	6000lm
CCT	3000K / 4000K (CCT switchable)	
CRI	>80	
Optic	Asymmetric optics	
UGR	<10	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	

PRODUCT MODEL

Part No.	LM	Power	Function
BPOW-3003000-NN	↑3600	↑30W	On/off
BPOW-3003000-DN	↑3600	↑30W	DALI dimming
BPOW-6005000-NN	↑6000	↑50W	On/off
BPOW-6005000-DN	↑6000	↑50W	DALI dimming

SIZE




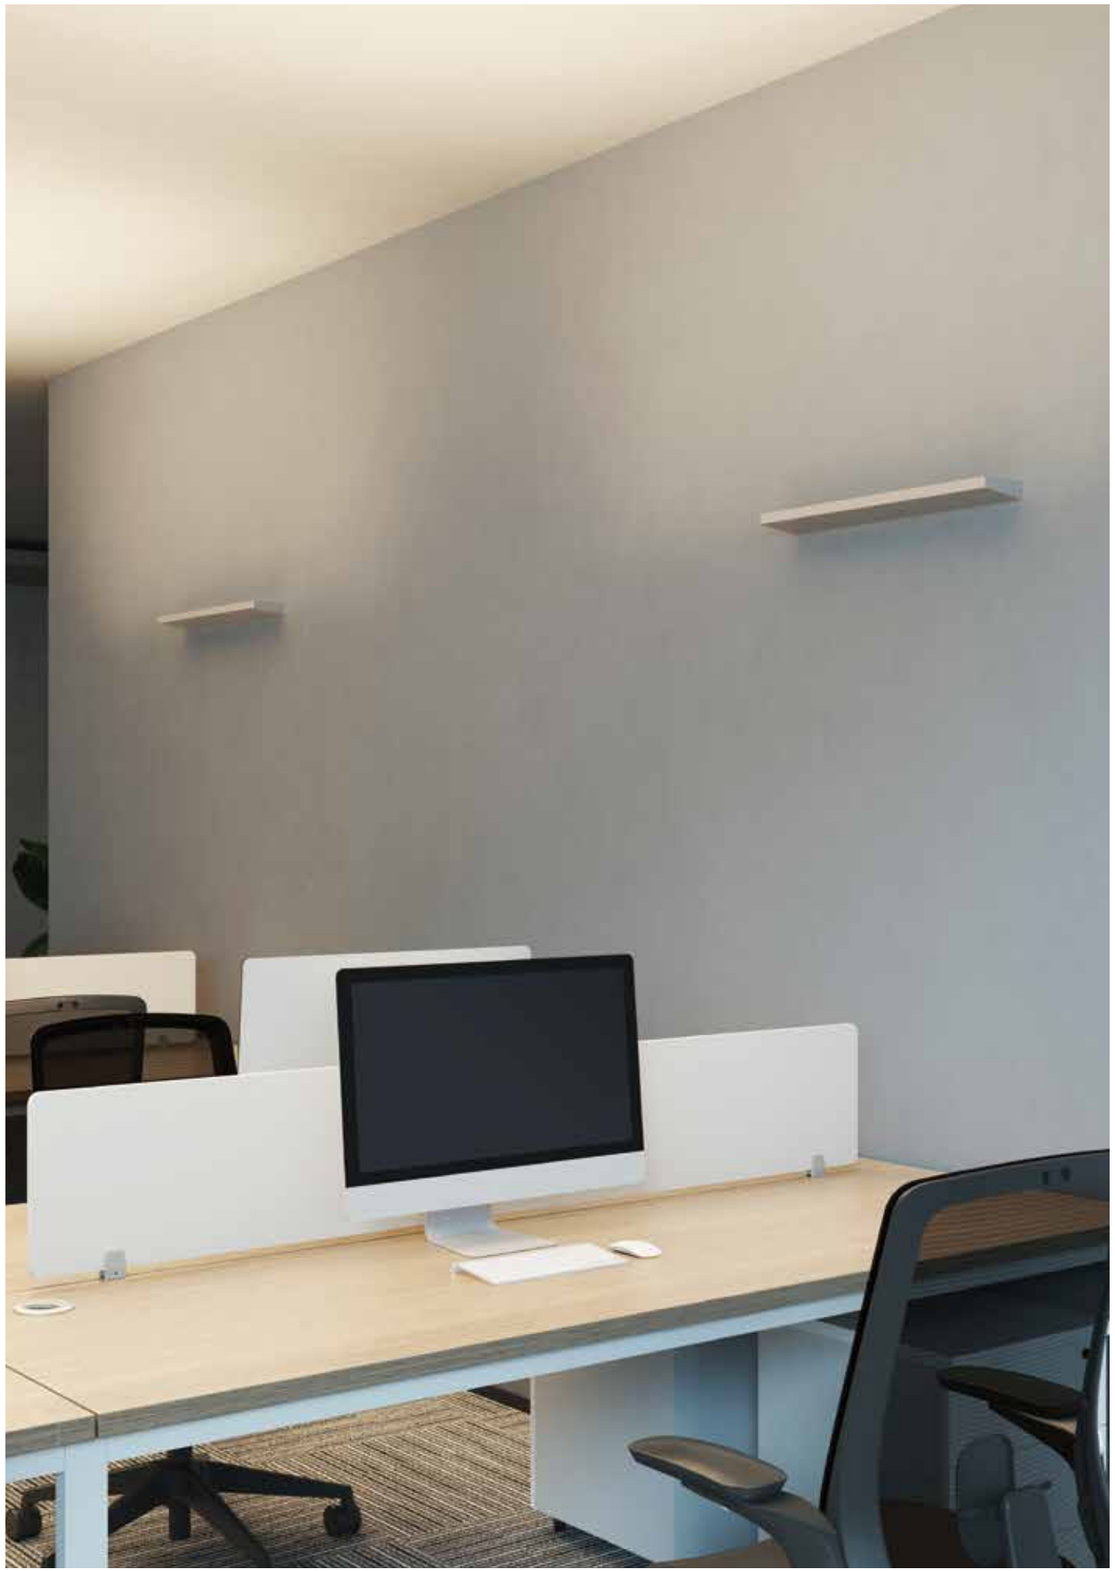

NEWA

APPLICATIONS:
Open-plan office, stairs, corridors and other office space.

IP20 | <19 UGR | Dimmable | CE | RoHS

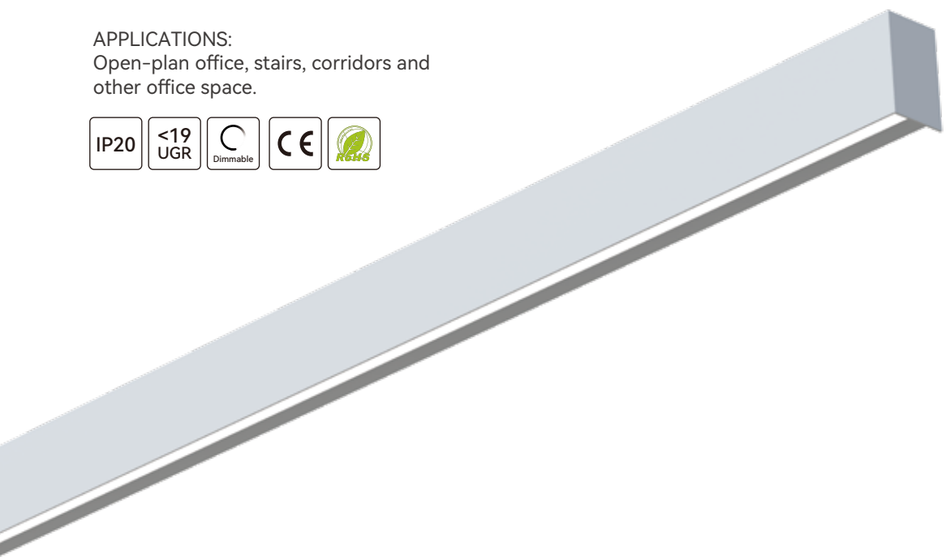

- Linkable wall lamp to avoid wiring problems, one input can support 30 meters
- Both direct and indirect light can wash the wall with 650mm height, uniformity light, low glare
- Impressive easy for installation and maintenance
- High lumen efficiency, up to 120LM/W




PRODUCT PARAMETER

Luminaire Wattage	30W	50W
Luminous Flux	3600lm	6000lm
CCT	3000K / 4000K / 6000K	
CRI	>80	
UGR	<19	
Protection Rating	IP20	
Longevity	50,000Hrs L80 B10	
Function	On/off / 1-10V dimming / DALI dimming	
Colours	Silver / White / Black	
Warranty	5 years	


PRODUCT MODEL

Part No.	LM	Power	Function
BNEW-1203015-NN	↑1800lm/1800lm↓	↑15W/15W↓	On/off
BNEW-1203015-VN	↑1800lm/1800lm↓	↑15W/15W↓	1-10V dimming
BNEW-1203015-DN	↑1800lm/1800lm↓	↑15W/15W↓	DALI dimming
BNEW-1805025-NN	↑3000lm/3000lm↓	↑25W/25W↓	On/off
BNEW-1805025-VN	↑3000lm/3000lm↓	↑25W/25W↓	1-10V dimming
BNEW-1805025-DN	↑3000lm/3000lm↓	↑25W/25W↓	DALI dimming

SIZE



LIGHT DISTRIBUTION









ARCHITECTURE GARDEN LIGHTING

02.

BOLLARDS - 185

FLOODLIGHTS - 207

WALL LUMINAIRES - - - - - - - - - - - - - - - - - - - 215

CEILING LUMINAIRES - - - - - - - - - - - - - - - - - 231

WALL RECESSED LUMINAIRES - - - - - - - - - - - - 237


TABLE LAMPS - 245

01
BOLLARDS

Bole is a range of high-quality IP65 bollard light with a contemporary and classic design. The fixture is with die-casting head, extrusion aluminum body and pc optical concept, sophisticated surface finish gives a high-end appearance of texture. Thanks to perfect powder coating, our bollards have TUV C5 certificates for tough weather conditions, resistance seawater resistance.

Bole range is available in Round/ Square/ Mushroom designs, and each design has 250mm, 600mm, 1000mm BOLE reaches 10 meters. 1000mm BOLE The professional optical solution offers a fully anti-glare and comfortable light uniformity, reaches 10 meters diameter wide light distribution but with a very narrow dark zone under the fixture. Support for smart control such as DALI2, bluetooth, CAMSAMBI, SWARM, HCL, etc.

Main applications in architectural buildings including commercial buildings, corporate headquarters, parks, recreational areas and gardens.

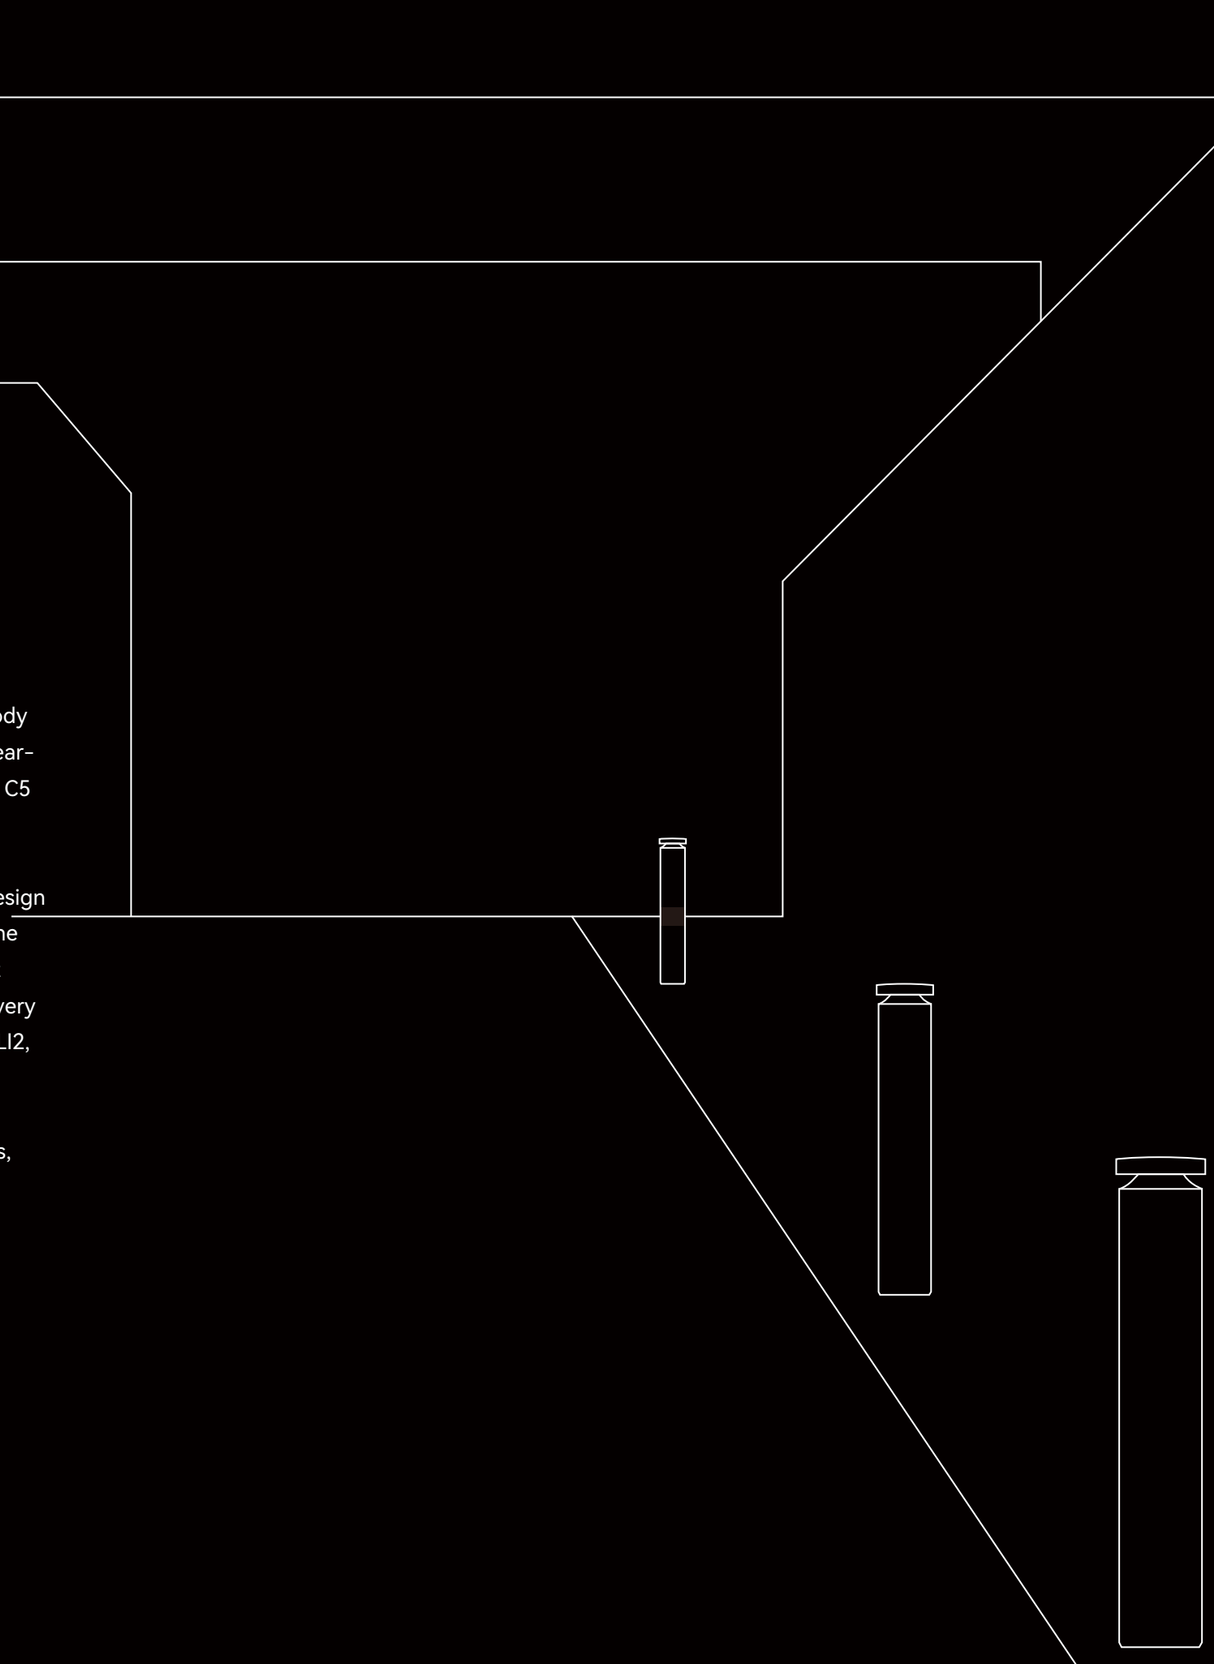

BOLLARDS



SHOW-L



PEGO



BUTTON-L



BOLE-M



BOLE-R



BOLE-S



BOLE-U

Luminaire Wattage	5W/ 12W	5W	6.5W/ 12W	6.5W/ 12W	12W/ 24W	12W/ 24W	10W/ 24W
Luminous Flux	450lm/ 1080lm	450lm	550lm/ 1050lm	324lm/ 736lm	1124lm/ 498lm	1162lm/ 505lm	907lm/ 2087lm
DarkSky	B1 U0 G1	B0 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G1	B1 U0 G0
optics	180°	180°	360°	360°	360°/ 180°	360°/ 270°/ 180°	360°
CRI	>80	>80	>80	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / DALI	On/off	On/off	On/off	On/off/ DAIL/ Wireless	On/off/ DAIL/ Wireless	On/off
Sensor	Motion sensor	No	No	No	Radar Sensor	Radar Sensor	No
Colours							

SHOW-L

NEW

APPLICATIONS:
Courtyards, gardens, and park pathways. Commercial buildings, corporate headquarters, and public leisure areas, etc.

IP65 IK08 DALI CE RoHS

- Illumination span: 8m(length)×4m(width) per unit;
- 60° wide-angle asymmetric optics deliver extensive coverage and excellent uniformity;
- Full cutoff design, DarkSky approval;
- 1,400hrs salt spray test passed












SHOW-L1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH1-10280-NN	1080lm	12W	2700K	On/off	No
B1SH1-10380-NN	1080lm	12W	3000K	On/off	No
B1SH1-10580-NN	1080lm	12W	4000K	On/off	No
B1SH1-10280-DN	1080lm	12W	2700K	DALI	No
B1SH1-10380-DN	1080lm	12W	3000K	DALI	No
B1SH1-10580-DN	1080lm	12W	4000K	DALI	No
B1SH1-10280-DM	1080lm	12W	2700K	DALI	Motion sensor
B1SH1-10380-DM	1080lm	12W	3000K	DALI	Motion sensor
B1SH1-10580-DM	1080lm	12W	4000K	DALI	Motion sensor

SIZE



LIGHT DISTRIBUTION

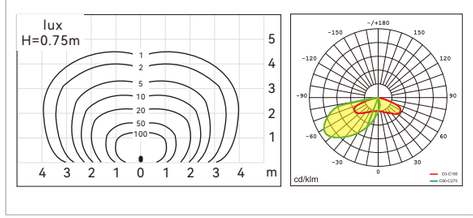




SHOW-L0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1SH0-05280-NN	450lm	5W	2700K	On/off	No
B1SH0-05380-NN	450lm	5W	3000K	On/off	No
B1SH0-05580-NN	450lm	5W	4000K	On/off	No
B1SH0-05280-DN	450lm	5W	2700K	On/off	No
B1SH0-05380-DN	450lm	5W	3000K	On/off	No
B1SH0-05580-DN	450lm	5W	4000K	On/off	No
B1SH0-05280-DM	450lm	5W	2700K	On/off	Motion sensor
B1SH0-05380-DM	450lm	5W	3000K	On/off	Motion sensor
B1SH0-05580-DM	450lm	5W	4000K	On/off	Motion sensor

SIZE



LIGHT DISTRIBUTION

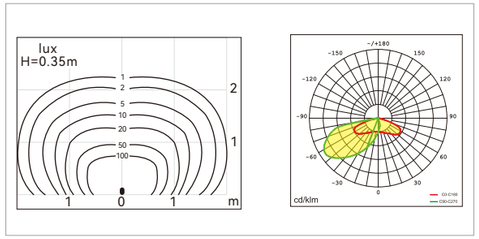

PEGO NEW

APPLICATIONS:
Courtyards, gardens, and park pathways. Commercial buildings, corporate headquarters, and public leisure areas, etc.

IP65 IK08 CE RoHS

- Asymmetric optics lens design, 7m(length)X3m(width) extensive coverage, excellent uniformity
- Full cutoff design, DarkSky approval
- Sleek and compact design with two height options
- 1,400hrs salt spray test












PEGO


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE1-05280-NN	450lm	5W	2700K	On/off	No
B1PE1-05380-NN	450lm	5W	3000K	On/off	No
B1PE1-05580-NN	450lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

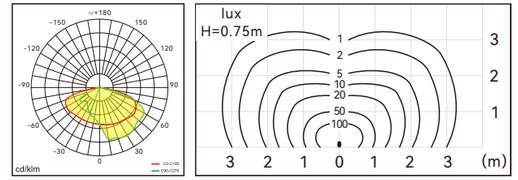

SIZE






PEGO


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE0-05280-NN	450lm	5W	2700K	On/off	No
B1PE0-05380-NN	450lm	5W	3000K	On/off	No
B1PE0-05580-NN	450lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

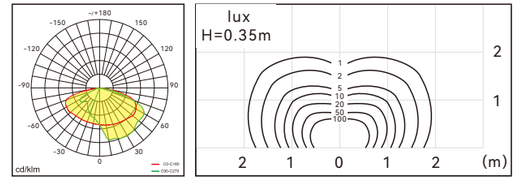

SIZE



BUTTON-L

NEW

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

IP65 IK08 DALI

- Large angle light distribution
- No glare, long range, uniform light
- Small size










BUTTON-L1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL1-12280-NN	1050lm	12W	2700K	On/off
B1TL1-12380-NN	1050lm	12W	3000K	On/off
B1TL1-12580-NN	1050lm	12W	4000K	On/off
B1TL1-12280-DN	1050lm	12W	2700K	DALI
B1TL1-12380-DN	1050lm	12W	3000K	DALI
B1TL1-12580-DN	1050lm	12W	4000K	DALI

SIZE



LIGHT DISTRIBUTION

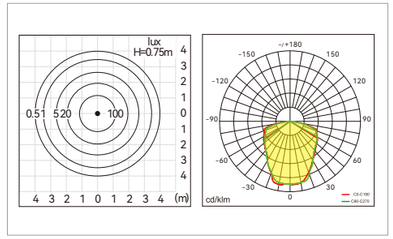




BUTTON-L0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1TL0-06280-NN	550lm	6.5W	2700K	On/off
B1TL0-06380-NN	550lm	6.5W	3000K	On/off
B1TL0-06580-NN	550lm	6.5W	4000K	On/off
B1TL0-06280-DN	550lm	6.5W	2700K	DALI
B1TL0-06380-DN	550lm	6.5W	3000K	DALI
B1TL0-06580-DN	550lm	6.5W	4000K	DALI

SIZE



LIGHT DISTRIBUTION

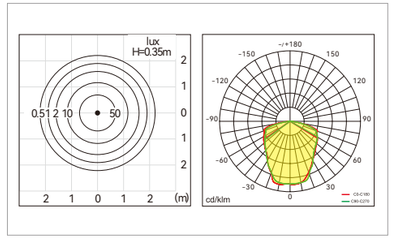

BOLE-M

NEW

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

IP65 IK10 DALI CE RoHS

- No glare/Light emission 360°
- No glare, long range, uniform light










BOLE-M1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM1-12280-NN	736lm	12W	2700K	On/off
B1BM1-12380-NN	736lm	12W	3000K	On/off
B1BM1-12580-NN	736lm	12W	4000K	On/off
B1BM1-12280-DN	736lm	12W	2700K	DALI
B1BM1-12380-DN	736lm	12W	3000K	DALI
B1BM1-12580-DN	736lm	12W	4000K	DALI

SIZE



LIGHT DISTRIBUTION

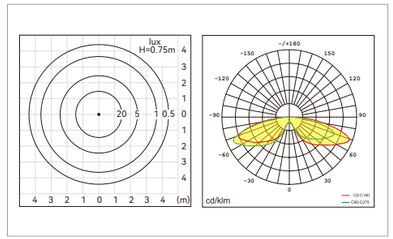




BOLE-M0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BM0-06280-NN	324lm	6.5W	2700K	On/off
B1BM0-06380-NN	324lm	6.5W	3000K	On/off
B1BM0-06580-NN	324lm	6.5W	4000K	On/off
B1BM0-06280-DN	324lm	6.5W	2700K	DALI
B1BM0-06380-DN	324lm	6.5W	3000K	DALI
B1BM0-06580-DN	324lm	6.5W	4000K	DALI

SIZE



LIGHT DISTRIBUTION

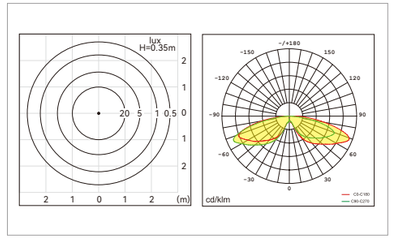

BOLE-R

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.



No glare/
Light emission 360° or optionally 180°



Long range



Uniform light







BOLE-R2

PRODUCT MODEL


Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR2-24280-NN	1124lm	24W	2700K	On/off
B1BR2-24280-DN	1124lm	24W	2700K	Dail 2
B1BR2-24280-WM	1124lm	24W	2700K	Wireless
B1BR2-24380-NN	1124lm	24W	3000K	On/off
B1BR2-24380-DN	1124lm	24W	3000K	Dail 2
B1BR2-24380-WM	1124lm	24W	3000K	Wireless
B1BR2-24580-NN	1124lm	24W	4000K	On/off
B1BR2-24580-DN	1124lm	24W	4000K	Dail 2
B1BR2-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR5-24280-NN	470lm	12W	2700K	On/off
B1BR5-24280-DN	470lm	12W	2700K	Dail 2
B1BR5-24280-WM	470lm	12W	2700K	Wireless
B1BR5-24380-NN	470lm	12W	3000K	On/off
B1BR5-24380-DN	470lm	12W	3000K	Dail 2
B1BR5-24380-WM	470lm	12W	3000K	Wireless
B1BR5-24580-NN	470lm	12W	4000K	On/off
B1BR5-24580-DN	470lm	12W	4000K	Dail 2
B1BR5-24580-WM	470lm	12W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

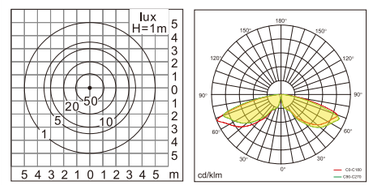



BOLE-R1

PRODUCT MODEL


Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR1-24280-NN	1124lm	24W	2700K	On/off
B1BR1-24280-DN	1124lm	24W	2700K	Dail 2
B1BR1-24280-WM	1124lm	24W	2700K	Wireless
B1BR1-24380-NN	1124lm	24W	3000K	On/off
B1BR1-24380-DN	1124lm	24W	3000K	Dail 2
B1BR1-24380-WM	1124lm	24W	3000K	Wireless
B1BR1-24580-NN	1124lm	24W	4000K	On/off
B1BR1-24580-DN	1124lm	24W	4000K	Dail 2
B1BR1-24580-WM	1124lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR4-24280-NN	470lm	12W	2700K	On/off
B1BR4-24280-DN	470lm	12W	2700K	Dail 2
B1BR4-24280-WM	470lm	12W	2700K	Wireless
B1BR4-24380-NN	470lm	12W	3000K	On/off
B1BR4-24380-DN	470lm	12W	3000K	Dail 2
B1BR4-24380-WM	470lm	12W	3000K	Wireless
B1BR4-24580-NN	470lm	12W	4000K	On/off
B1BR4-24580-DN	470lm	12W	4000K	Dail 2
B1BR4-24580-WM	470lm	12W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

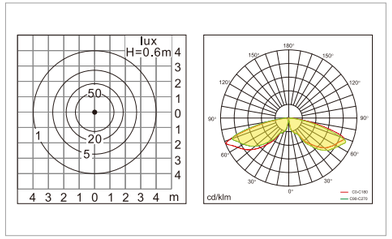



BOLE-R0

PRODUCT MODEL


Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR0-12280-NN	498lm	12W	2700K	On/off
B1BR0-12280-DN	498lm	12W	2700K	Dail 2
B1BR0-12380-NN	498lm	12W	3000K	On/off
B1BR0-12380-DN	498lm	12W	3000K	Dail 2
B1BR0-12580-NN	498lm	12W	4000K	On/off
B1BR0-12580-DN	498lm	12W	4000K	Dail 2
B1BR0-24280-NN	1124lm	24W	2700K	On/off
B1BR0-24280-DN	1124lm	24W	2700K	Dail 2
B1BR0-24380-NN	1124lm	24W	3000K	On/off
B1BR0-24380-DN	1124lm	24W	3000K	Dail 2
B1BR0-24580-NN	1124lm	24W	4000K	On/off
B1BR0-24580-DN	1124lm	24W	4000K	Dail 2


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BR3-12280-NN	470lm	12W	2700K	On/off
B1BR3-12280-DN	470lm	12W	2700K	Dail 2
B1BR3-12380-NN	470lm	12W	3000K	On/off
B1BR3-12380-DN	470lm	12W	3000K	Dail 2
B1BR3-12580-NN	470lm	12W	4000K	On/off
B1BR3-12580-DN	470lm	12W	4000K	Dail 2

SIZE



LIGHT DISTRIBUTION

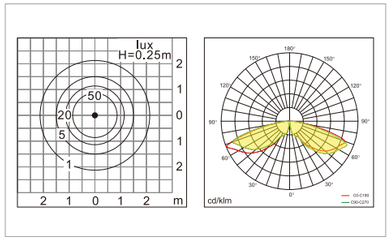


BOLE-S

APPLICATIONS:
Commercial buildings, corporate headquarters, parks,recreational areas, gardens, etc.

IP65 IK10

- No glare/Light emission 360° or optionally 270°or optionally 180°
- No glare, long range, uniform light











BOLE-S2

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS2-24280-NN	1162lm	24W	2700K	On/off
B1BS2-24280-DN	1162lm	24W	2700K	Dail 2
B1BS2-24280-WM	1162lm	24W	2700K	Wireless
B1BS2-24380-NN	1162lm	24W	3000K	On/off
B1BS2-24380-DN	1162lm	24W	3000K	Dail 2
B1BS2-24380-WM	1162lm	24W	3000K	Wireless
B1BS2-24580-NN	1162lm	24W	4000K	On/off
B1BS2-24580-DN	1162lm	24W	4000K	Dail 2
B1BS2-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS5-24280-NN	960lm	24W	2700K	On/off
B1BS5-24280-DN	960lm	24W	2700K	Dail 2
B1BS5-24280-WM	960lm	24W	2700K	Wireless
B1BS5-24380-NN	960lm	24W	3000K	On/off
B1BS5-24380-DN	960lm	24W	3000K	Dail 2
B1BS5-24380-WM	960lm	24W	3000K	Wireless
B1BS5-24580-NN	960lm	24W	4000K	On/off
B1BS5-24580-DN	960lm	24W	4000K	Dail 2
B1BS5-24580-WM	960lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS8-24280-NN	890lm	24W	2700K	On/off
B1BS8-24280-DN	890lm	24W	2700K	Dail 2
B1BS8-24280-WM	890lm	24W	2700K	Wireless
B1BS8-24380-NN	890lm	24W	3000K	On/off
B1BS8-24380-DN	890lm	24W	3000K	Dail 2
B1BS8-24380-WM	890lm	24W	3000K	Wireless
B1BS8-24580-NN	890lm	24W	4000K	On/off
B1BS8-24580-DN	890lm	24W	4000K	Dail 2
B1BS8-24580-WM	890lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

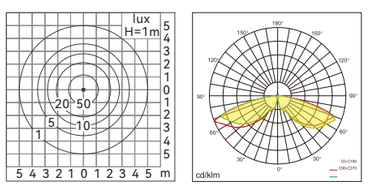



BOLE-S1

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS1-24280-NN	1162lm	24W	2700K	On/off
B1BS1-24280-DN	1162lm	24W	2700K	Dail 2
B1BS1-24280-WM	1162lm	24W	2700K	Wireless
B1BS1-24380-NN	1162lm	24W	3000K	On/off
B1BS1-24380-DN	1162lm	24W	3000K	Dail 2
B1BS1-24380-WM	1162lm	24W	3000K	Wireless
B1BS1-24580-NN	1162lm	24W	4000K	On/off
B1BS1-24580-DN	1162lm	24W	4000K	Dail 2
B1BS1-24580-WM	1162lm	24W	4000K	Wireless


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS4-24280-NN	960lm	24W	2700K	On/off
B1BS4-24280-DN	960lm	24W	2700K	Dail 2
B1BS4-24280-WM	960lm	24W	2700K	Wireless
B1BS4-24380-NN	960lm	24W	3000K	On/off
B1BS4-24380-DN	960lm	24W	3000K	Dail 2
B1BS4-24380-WM	960lm	24W	3000K	Wireless
B1BS4-24580-NN	960lm	24W	4000K	On/off
B1BS4-24580-DN	960lm	24W	4000K	Dail 2
B1BS4-24580-WM	960lm	24W	4000K	Wireless


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS7-24280-NN	890lm	24W	2700K	On/off
B1BS7-24280-DN	890lm	24W	2700K	Dail 2
B1BS7-24280-WM	890lm	24W	2700K	Wireless
B1BS7-24380-NN	890lm	24W	3000K	On/off
B1BS7-24380-DN	890lm	24W	3000K	Dail 2
B1BS7-24380-WM	890lm	24W	3000K	Wireless
B1BS7-24580-NN	890lm	24W	4000K	On/off
B1BS7-24580-DN	890lm	24W	4000K	Dail 2
B1BS7-24580-WM	890lm	24W	4000K	Wireless

SIZE



LIGHT DISTRIBUTION

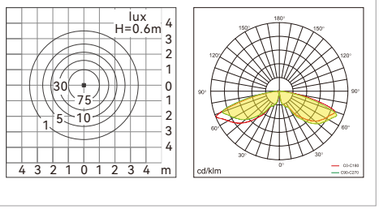



BOLE-S0

PRODUCT MODEL

Optics with 360 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS0-12280-NN	505lm	12W	2700K	On/off
B1BS0-12280-DN	505lm	12W	2700K	Dail 2
B1BS0-12380-NN	505lm	12W	3000K	On/off
B1BS0-12380-DN	505lm	12W	3000K	Dail 2
B1BS0-12580-NN	505lm	12W	4000K	On/off
B1BS0-12580-DN	505lm	12W	4000K	Dail 2
B1BS0-24280-NN	1162lm	24W	2700K	On/off
B1BS0-24280-DN	1162lm	24W	2700K	Dail 2
B1BS0-24380-NN	1162lm	24W	3000K	On/off
B1BS0-24380-DN	1162lm	24W	3000K	Dail 2
B1BS0-24580-NN	1162lm	24W	4000K	On/off
B1BS0-24580-DN	1162lm	24W	4000K	Dail 2


Optics with 270 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS3-12280-NN	505lm	12W	2700K	On/off
B1BS3-12280-DN	505lm	12W	2700K	Dail 2
B1BS3-12380-NN	505lm	12W	3000K	On/off
B1BS3-12380-DN	505lm	12W	3000K	Dail 2
B1BS3-12580-NN	505lm	12W	4000K	On/off
B1BS3-12580-DN	505lm	12W	4000K	Dail 2
B1BS3-24280-NN	960lm	24W	2700K	On/off
B1BS3-24280-DN	960lm	24W	2700K	Dail 2
B1BS3-24380-NN	960lm	24W	3000K	On/off
B1BS3-24380-DN	960lm	24W	3000K	Dail 2
B1BS3-24580-NN	960lm	24W	4000K	On/off
B1BS3-24580-DN	960lm	24W	4000K	Dail 2


Optics with 180 ° emission

Part No.	LM	Power	CCT	Dimming
B1BS6-12280-NN	450lm	12W	2700K	On/off
B1BS6-12280-DN	450lm	12W	2700K	Dail 2
B1BS6-12380-NN	450lm	12W	3000K	On/off
B1BS6-12380-DN	450lm	12W	3000K	Dail 2
B1BS6-12580-NN	450lm	12W	4000K	On/off
B1BS6-12580-DN	450lm	12W	4000K	Dail 2
B1BS6-24280-NN	890lm	24W	2700K	On/off
B1BS6-24280-DN	890lm	24W	2700K	Dail 2
B1BS6-24380-NN	890lm	24W	3000K	On/off
B1BS6-24380-DN	890lm	24W	3000K	Dail 2
B1BS6-24580-NN	890lm	24W	4000K	On/off
B1BS6-24580-DN	890lm	24W	4000K	Dail 2

SIZE



LIGHT DISTRIBUTION

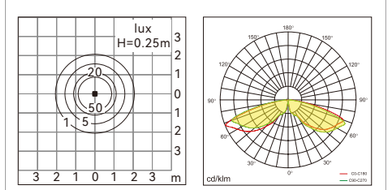


BOLE-U

APPLICATIONS:
Commercial buildings, corporate headquarters, parks, recreational areas, gardens, etc.

IP65 IK10 CE RoHS


- No glare/Light emission 360°
- No glare, long range, uniform light









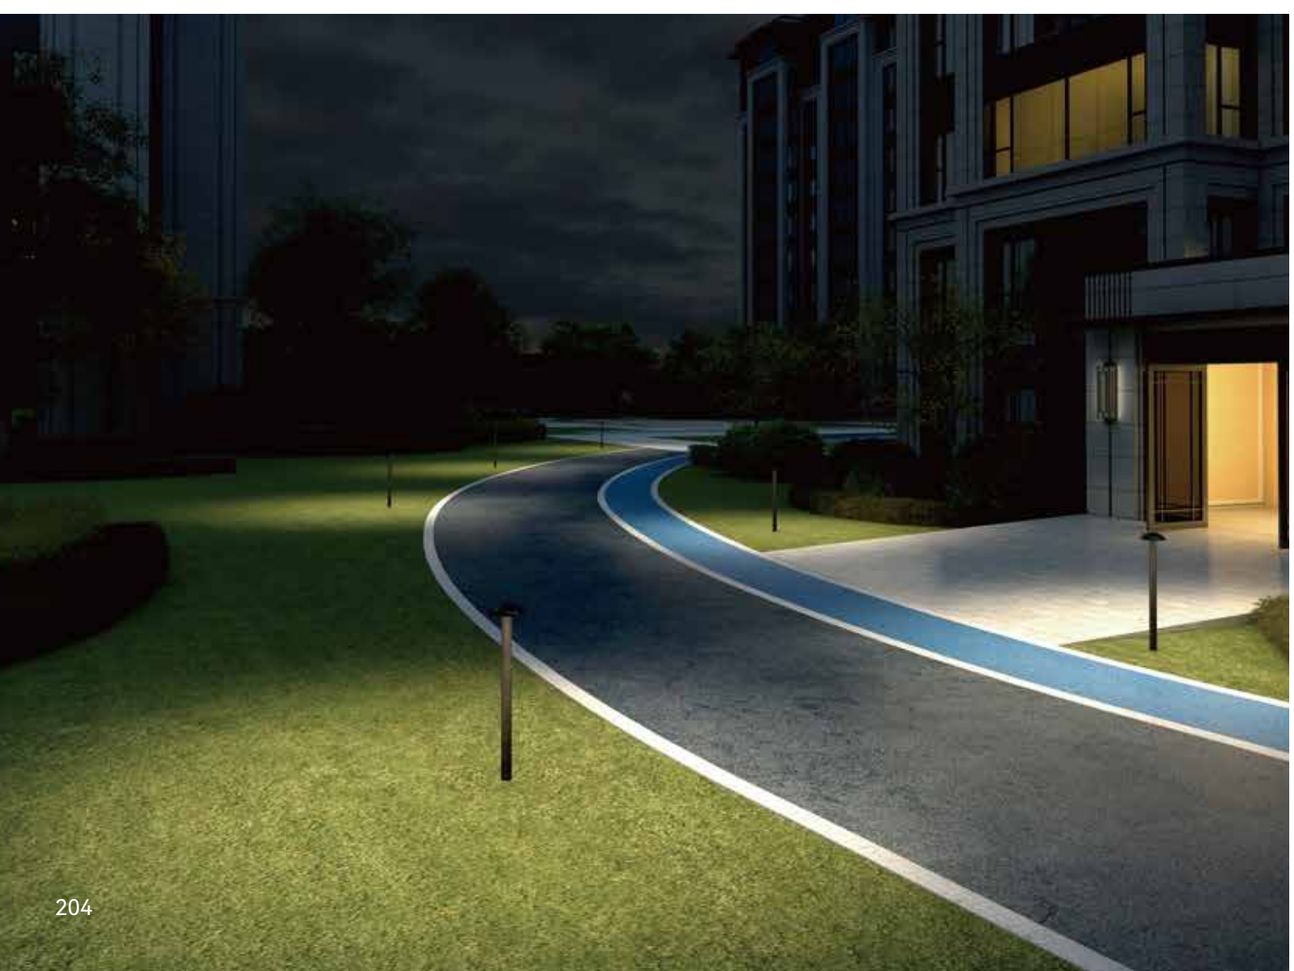




BOLE-U2


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU2-24280-NN	2087lm	24W	2700K	On/off
B1BU2-24380-NN	2087lm	24W	3000K	On/off
B1BU2-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

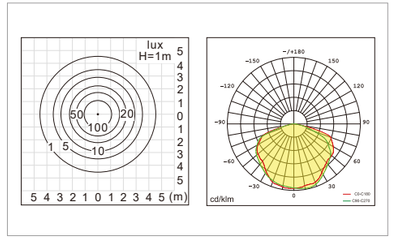




BOLE-U1


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU1-24280-NN	2087lm	24W	2700K	On/off
B1BU1-24380-NN	2087lm	24W	3000K	On/off
B1BU1-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

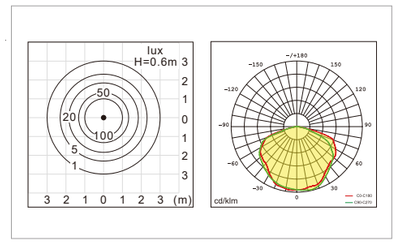




BOLE-U0


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B1BU0-10280-NN	907lm	10W	2700K	On/off
B1BU0-10380-NN	907lm	10W	3000K	On/off
B1BU0-10580-NN	907lm	10W	4000K	On/off
B1BU0-24280-NN	2087lm	24W	2700K	On/off
B1BU0-24380-NN	2087lm	24W	3000K	On/off
B1BU0-24580-NN	2087lm	24W	4000K	On/off

SIZE



LIGHT DISTRIBUTION

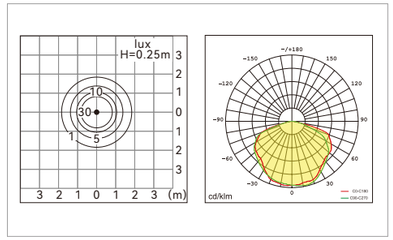


02
FLOODLIGHTS


Cica is a series of high-quality floodlights featuring a bionic, richly textured design composed of die-cast aluminum parts, a reflector, and tempered glass. With a high-quality outdoor powder-coating process, Cica offers strong weather resistance and carries an IP65 protection rating.

The Cica series adopts a one-piece die-casting process for excellent heat dissipation. It comes in four sizes and provides three beam angles to meet various lighting needs. Its deep anti-glare reflector ensures a clean light spot with an effective anti-glare effect. A variety of optical accessories and DALI-2 dimming are supported.

Cica floodlights are easy to install, with angle adjustment possible in two directions, precisely meeting the lighting requirements for trees, architecture, and sculptures. A five-year warranty is provided.

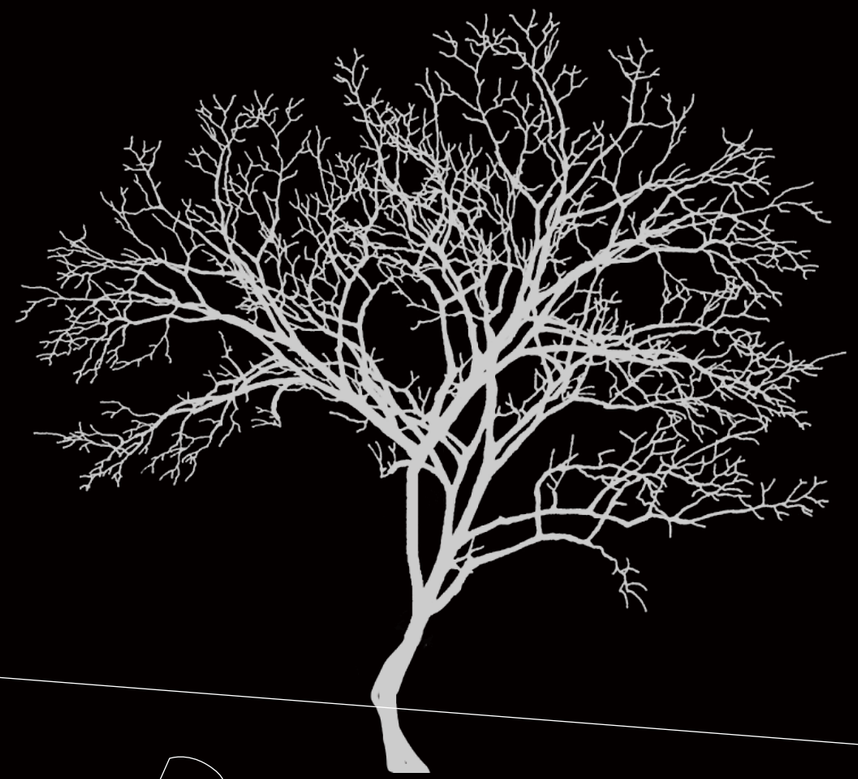





FLOODLIGHTS



CICA-X



CICA-M



CICA-S



CICA-T

Luminaire Wattage	40W	27W	10W	5W
Luminous Flux	2670lm/ 2543lm/ 2370lm	1730lm/ 2050lm/ 1810lm	685lm/ 595lm/ 706lm	1730lm/ 2050lm/ 1810lm
optics	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	24°/ 36°
CRI	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / DALI	On/off / DALI	On/off	On/off
Protection Level	IP65/ IK08	IP65/ IK08	IP65/ IK08	IP65/ IK08
Colours				

CICA

APPLICATIONS:
Trees, buildings and sculptures, etc.

IP65 IK08 DALI 110° CE RoHS

- Bionic design
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming












CICA-X


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CX0-40502-NN	2670lm	40W	2700K/3000K/4000K	15°	On/off
B3CX0-40502-DN	2670lm	40W	2700K/3000K/4000K	15°	DALI 2
B3CX0-40503-NN	2543lm	40W	2700K/3000K/4000K	24°	On/off
B3CX0-40503-DN	2543lm	40W	2700K/3000K/4000K	24°	DALI 2
B3CX0-40504-NN	2370lm	40W	2700K/3000K/4000K	38°	On/off
B3CX0-40504-DN	2370lm	40W	2700K/3000K/4000K	38°	DALI 2

LIGHT DISTRIBUTION

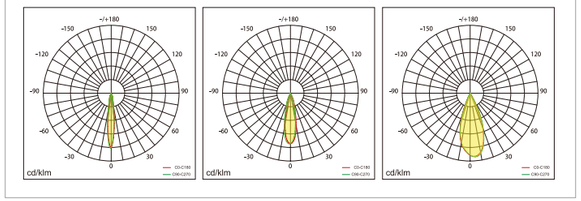

SIZE






CICA-M


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CM0-27502-NN	1730lm	27W	2700K/3000K/4000K	15°	On/off
B3CM0-27502-DN	1730lm	27W	2700K/3000K/4000K	15°	DALI 2
B3CM0-27503-NN	2050lm	27W	2700K/3000K/4000K	24°	On/off
B3CM0-27503-DN	2050lm	27W	2700K/3000K/4000K	24°	DALI 2
B3CM0-27504-NN	1810lm	27W	2700K/3000K/4000K	38°	On/off
B3CM0-27504-DN	1810lm	27W	2700K/3000K/4000K	38°	DALI 2

LIGHT DISTRIBUTION

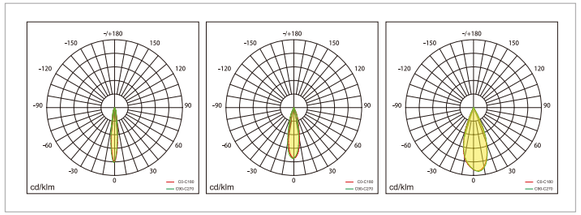

SIZE



CICA

APPLICATIONS:
Trees, buildings and sculptures, etc.

IP65 IK08 DALI 110° CE RoHS

- Cica series use one piece die-casting molding process, good heat dissipation performance.
- Deep anti-glare reflector design, clean light spot, with good anti-glare effect.
- Support a variety of optical accessories and Dali2 dimming










CICA-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CS0-10502-NN	685lm	10W	2700K/3000K/4000K	15°	On/off
B3CS0-10503-NN	595lm	10W	2700K/3000K/4000K	24°	On/off
B3CS0-10504-NN	706lm	10W	2700K/3000K/4000K	38°	On/off

LIGHT DISTRIBUTION

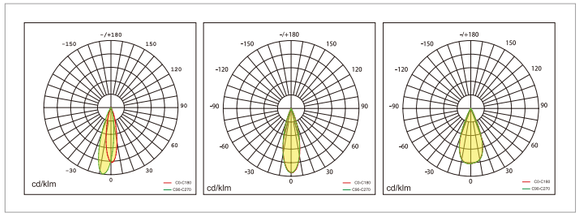

SIZE






CICA-T


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B3CT0-05503-NN	310lm	5W	2700K/3000K/4000K	24°	On/off
B3CT0-05504-NN	315lm	5W	2700K/3000K/4000K	36°	On/off

LIGHT DISTRIBUTION

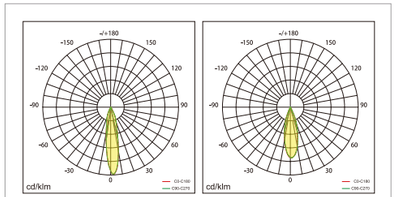

SIZE




03
WALL LUMINAIRES

Wall luminaires with simple design, composed of die-cast aluminium, reflector and tempered glass. With high-quality outdoor special powder coating, which can make the lamp have a tough weather resistance and anti-aging functions, and the protection grade is IP65.

Wall luminaires adopt deep anti-glare reflective cup, with direct and indirect light, which can provide a variety of light emission angles to meet the needs of various scenes, it is with comfortable vision and without light spot. There are optional accessories, which makes the lamp have excellent anti-glare performance. The lamp housing is with integrally die-cast aluminum, and has good heat dissipation performance. Optional DALI2, wireless intelligent dimming and other functions are optional, it is with built-in waterproof terminals, which is convenient for installation and maintenance.

We provide 5 years warranty the lamp can be used as indoor and outdoor facade lighting, architectural decorative lighting, etc.

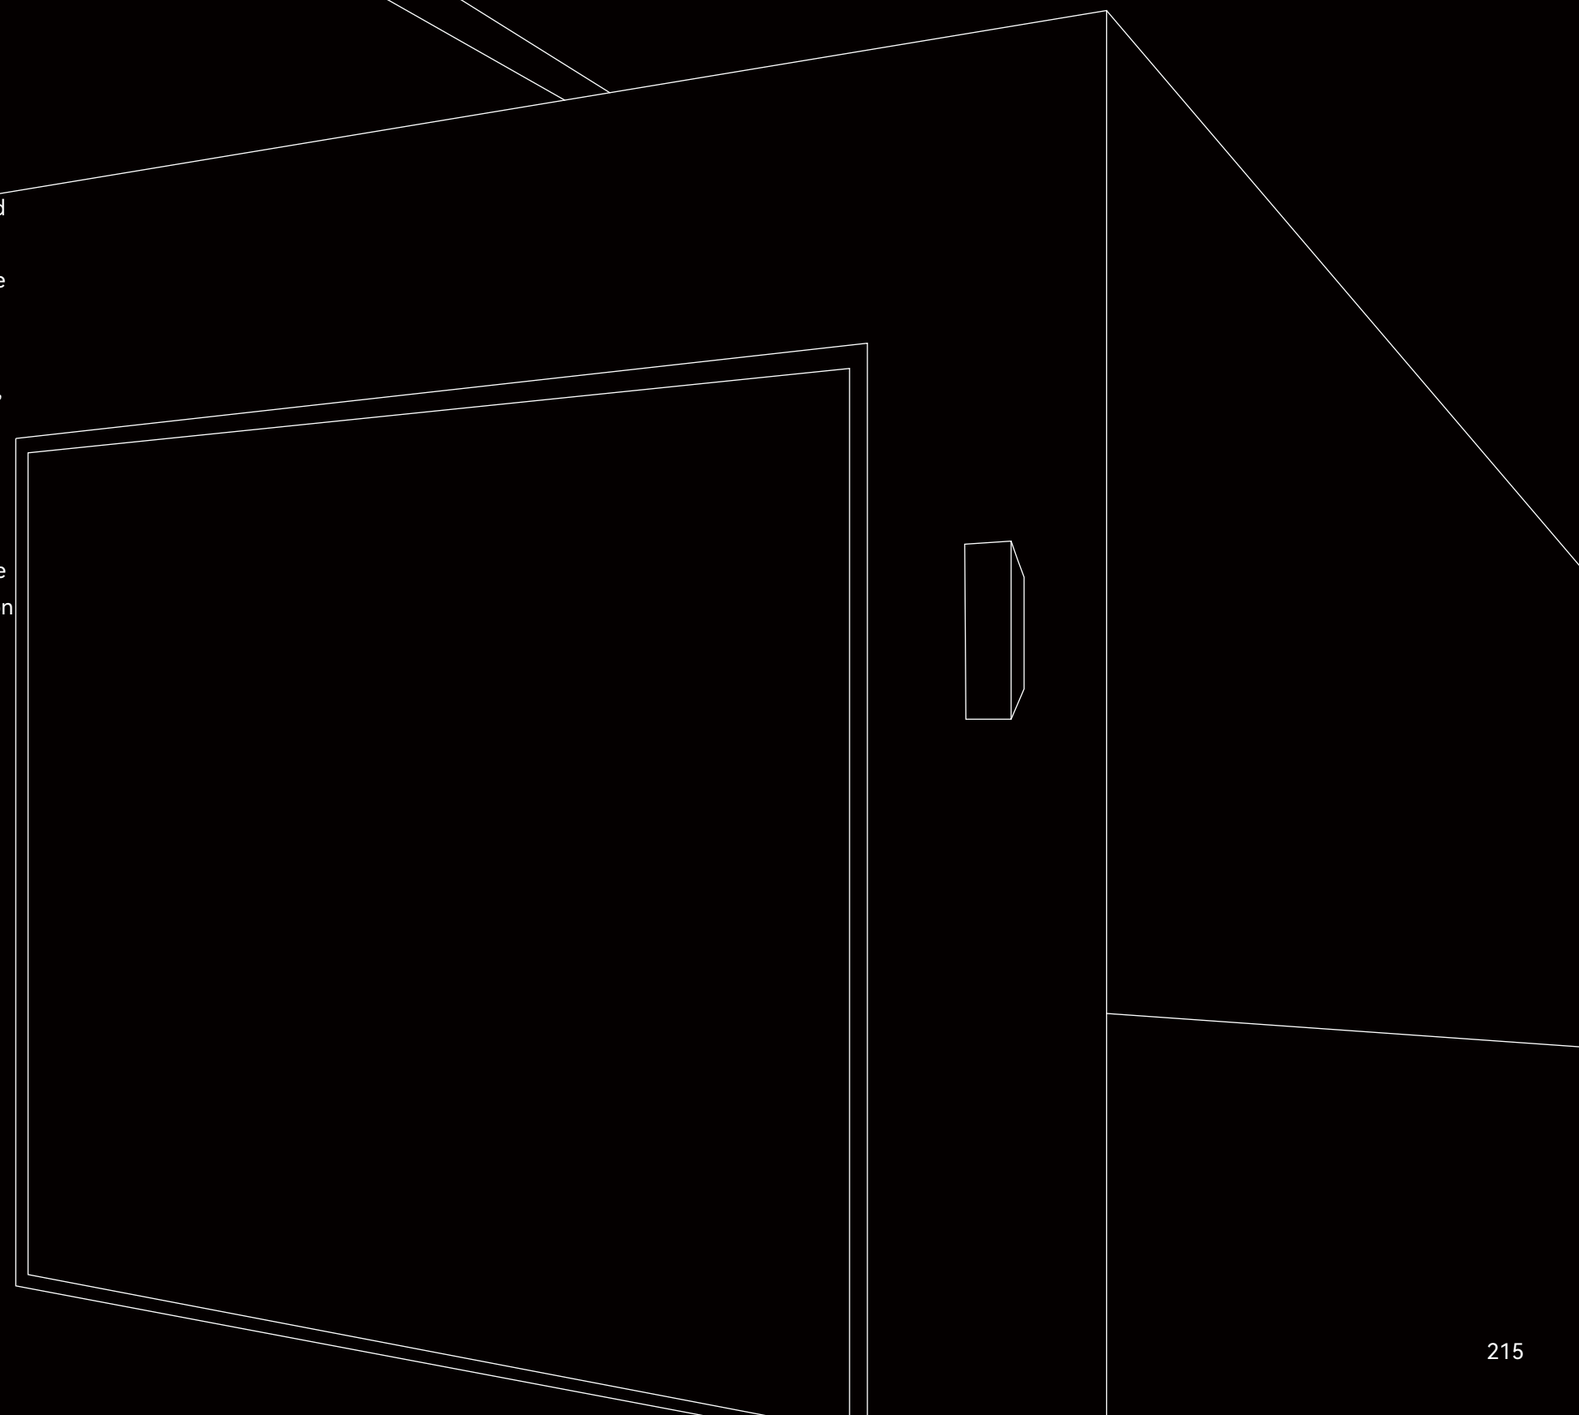

WALL LUMINAIRES



PEGO-W



LUNA



CUBE



TIE-R



TIE-S



NATURE-W

Luminaire Wattage	5W	12W/ 24W	6W/ 12W/ 24W	24W/ 43W	24W/ 43W	10W
Luminous Flux	550lm	1300lm/ 2630lm	500lm/ 1050lm/ 2115lm	2350lm/ 3080lm	2382m/ 3120lm	963lm
optics	Asymmetric optics	130°	Asymmetric optics	↓18°/18°↑/ ↓24°/24°↑/ ↓36°/36°↑	↓18°/18°↑/ ↓24°/24°↑/ ↓36°/36°↑	360°
CRI	>80	>80	>80	>80	>80	>80
CCT	2700K/ 3000K/ 4000K	3000K/ 4000K CCT switchable	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off	On/off / DALI	On/off / DALI	On/off / DALI	On/off / DALI	On/off
Protection Level	IP65/ IK08	IP65/ IK06	IP65/ IK07	IP65/ IK07	IP65/ IK07	IP65/ IK08
Colours						

PEGO-W

APPLICATIONS:
Suitable for indoor and outdoor facade lighting, architectural decorative lighting, etc.


IP65 IK08

- Professional Optical Design for Outdoor Gardens
- 45° wide asymmetric beam angle
- Uniform illumination across 8x4M coverage
- 1,400hrs salt spray test







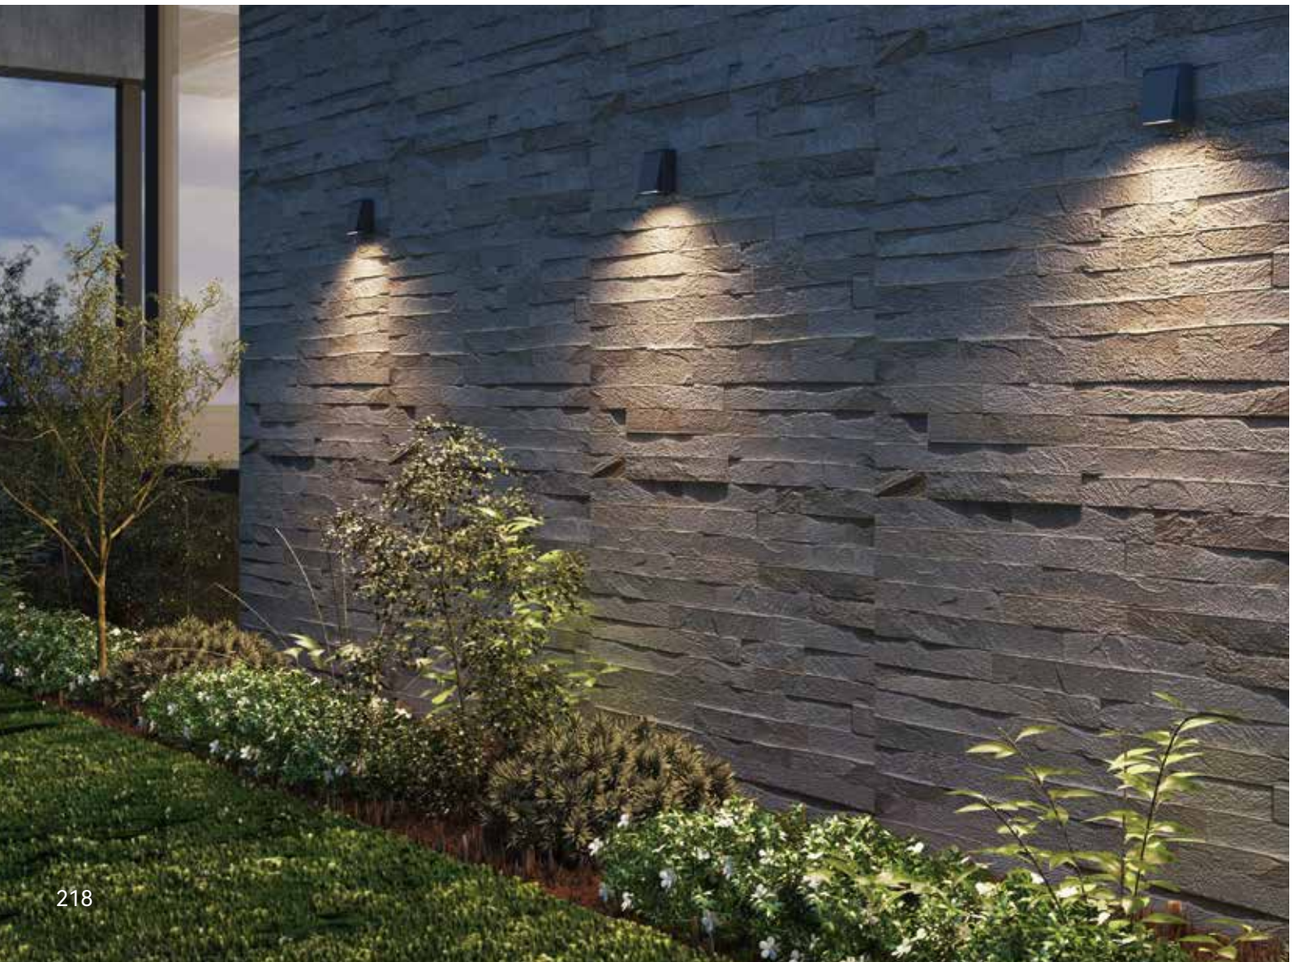




PEGO-W


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming	Sensor
B1PE0-05280-NN	550lm	5W	2700K	On/off	No
B1PE0-05380-NN	550lm	5W	3000K	On/off	No
B1PE0-05580-NN	550lm	5W	4000K	On/off	No

LIGHT DISTRIBUTION

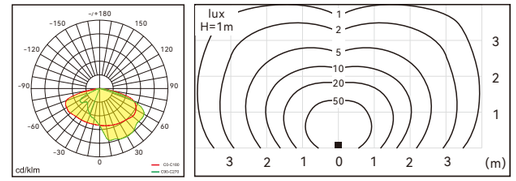

SIZE



LUNA

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.

IP65 | IK06 | DALI

- High-quality glass diffuser design, uniform illumination with no edge shadows
- DIP switch adjustable CCT for flexible adaptation to various applications
- 1,400hrs salt spray test












LUNA


PRODUCT MODEL

Part No.	LM	Power	CCT switchable	Dimming
B4LA0-12380-NN	1300lm	12W	4000K/3000K	On/off
B4LA0-12580-NN	1300lm	12W	4000K/3000K	On/off
B4LA0-12380-DN	1300lm	12W	4000K/3000K	DALI
B4LA0-12580-DN	1300lm	12W	4000K/3000K	DALI
B4LA0-24380-NN	2630lm	24W	4000K/3000K	On/off
B4LA0-24580-NN	2630lm	24W	4000K/3000K	On/off
B4LA0-24380-DN	2630lm	24W	4000K/3000K	DALI
B4LA0-24580-DN	2630lm	24W	4000K/3000K	DALI

LIGHT DISTRIBUTION



SIZE



CUBE

NEW

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting.

IP65 | IK07 | DALI

- Modular polarized lens design, various light distribution modes can be combined
- Single indirect/ direct light or both indirect and direct light optional
- Anti-glare design with large shielding angle
- IP65 protection, salt spray test more than 1400 hours










CUBE


PRODUCT MODEL

Part No.	LM	Power	CCT	Optic	Dimming
B4CU0-24366-NN	↑1120lm/995lm↓	↑12W/12W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-24366-DN	↑1120lm/995lm↓	↑12W/12W↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12360-NN	995lm↓	12W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12360-DN	995lm↓	12W↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-12366-NN	↑550lm/500lm↓	↑6W/6W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-12366-DN	↑550lm/500lm↓	↑6W/6W↓	2700K/3000K/4000K	Asymmetric	DALI 2
B4CU0-06360-NN	500lm↓	6W↓	2700K/3000K/4000K	Asymmetric	On/off
B4CU0-06360-DN	500lm↓	6W↓	2700K/3000K/4000K	Asymmetric	DALI 2

LIGHT DISTRIBUTION



SIZE



TIE-R

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.

IP65 IK07

- Optional DALI2, wireless intelligent dimming
- Direct and indirect light












TIE-R


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TR0-24522-NN	2350lm	24W	2700K/3000K/4000K	↓18°/18°↑	On/off
B4TR0-24522-DN	2350lm	24W	2700K/3000K/4000K	↓18°/18°↑	DALI 2
B4TR0-24533-NN	2350lm	24W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TR0-24533-DN	2350lm	24W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TR0-24544-NN	2350lm	24W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TR0-24544-DN	2350lm	24W	2700K/3000K/4000K	↓36°/36°↑	DALI 2
B4TR0-43522-NN	3080lm	43W	2700K/3000K/4000K	↓18°/18°↑	On/off
B4TR0-43522-DN	3080lm	43W	2700K/3000K/4000K	↓18°/18°↑	DALI 2
B4TR0-43533-NN	3080lm	43W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TR0-43533-DN	3080lm	43W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TR0-43544-NN	3080lm	43W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TR0-43544-DN	3080lm	43W	2700K/3000K/4000K	↓36°/36°↑	DALI 2

LIGHT DISTRIBUTION

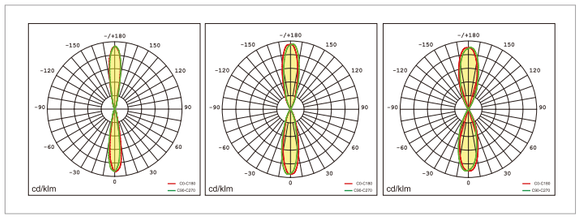

SIZE



TIE-S

APPLICATIONS:
Perfect for outdoor facade lighting and indoor architectural decorative lighting and it can be used indoors as well.

IP65 IK07

- Optional DALI2, wireless intelligent dimming
- Direct and indirect light














TIE-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B4TS0-24522-NN	2382lm	24W	2700K/3000K/4000K	↓18°/18°↑	On/off
B4TS0-24522-DN	2382lm	24W	2700K/3000K/4000K	↓18°/18°↑	DALI 2
B4TS0-24533-NN	2382lm	24W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TS0-24533-DN	2382lm	24W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TS0-24544-NN	2382lm	24W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TS0-24544-DN	2382lm	24W	2700K/3000K/4000K	↓36°/36°↑	DALI 2
B4TS0-43522-NN	3120lm	43W	2700K/3000K/4000K	↓18°/18°↑	On/off
B4TS0-43522-DN	3120lm	43W	2700K/3000K/4000K	↓18°/18°↑	DALI 2
B4TS0-43533-NN	3120lm	43W	2700K/3000K/4000K	↓24°/24°↑	On/off
B4TS0-43533-DN	3120lm	43W	2700K/3000K/4000K	↓24°/24°↑	DALI 2
B4TS0-43544-NN	3120lm	43W	2700K/3000K/4000K	↓36°/36°↑	On/off
B4TS0-43544-DN	3120lm	43W	2700K/3000K/4000K	↓36°/36°↑	DALI 2

LIGHT DISTRIBUTION

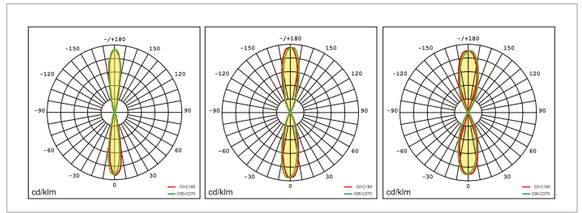

SIZE




NATURE-W

APPLICATIONS:
It can be used for indoor and outdoor facade lighting,architectural decorative lighting, etc.

IP65 IK08



No Glare



Light Emission 360°








NATURE-W


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B4NW0-10280-NN	963lm	10W	2700K	On/off
B4NW0-10380-NN	963lm	10W	3000K	On/off
B4NW0-10580-NN	963lm	10W	4000K	On/off

SIZE



LIGHT DISTRIBUTION



04
CEILING LUMINAIRES

Halo is a round ceiling lamp with simple appearance and rich texture. The main body of the lamp is die-cast and has good heat dissipation performance. With high quality outdoor powder technology, the lamp has tough weather resistance. Lamp protection grade is IP65.

Halo series have two product sizes with three beam angles to meet lighting requirements in various scenes. The optical part of the lamp is an integrated ring reflective cup design, with anti-glare hood and high quality toughened glass, so that the lamp has a good anti-glare effect and comfortable visual perception. Dali2 dimming, wireless dimming, radar sensing and other intelligent control modes can be provided.

Halo lamp is easy to install, and the optional installation accessories can meet the installation requirements in different cable outlet. The lamps have 5 years warranty.
It can be used in indoor lighting, outdoor corridor lighting, entrance lighting and other application areas.



CEILING LUMINAIRES



HALO-1



HALO-0

Luminaire Wattage	39W/ 25W	13W
Luminous Flux	2135lm/ 1987lm/ 1746lm 2600lm/ 2328lm/ 2000lm	1069lm/ 1105lm/ 1173lm
optics	20°/ 34°/ 48°	20°/ 34°/ 48°
CRI	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off/ DAIL/ Wireless	On/off
Sensor	Radar Sensor	Radar Sensor
Protection Level	IP65/ IK05	IP65/ IK05
Colours		

HALO

APPLICATIONS:
It can be used in indoor lighting, outdoor corridor lighting, entrance lighting

IP65 IK05

- The optical part is designed as a one-piece annular reflector
- Simple, easy and quick installation














HALO-1


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA1-25520-NN	2135lm	25W	2700K/3000K/4000K	20°	On/off
B5HA1-25520-DN	2135lm	25W	2700K/3000K/4000K	20°	DALI 2
B5HA1-25520-WM	2135lm	25W	2700K/3000K/4000K	20°	Wireless
B5HA1-25540-NN	1987lm	25W	2700K/3000K/4000K	34°	On/off
B5HA1-25540-DN	1987lm	25W	2700K/3000K/4000K	34°	DALI 2
B5HA1-25540-WM	1987lm	25W	2700K/3000K/4000K	34°	Wireless
B5HA1-25550-NN	1746lm	25W	2700K/3000K/4000K	48°	On/off
B5HA1-25550-DN	1746lm	25W	2700K/3000K/4000K	48°	DALI 2
B5HA1-25550-WM	1746lm	25W	2700K/3000K/4000K	48°	Wireless
B5HA1-39520-NN	2600lm	39W	2700K/3000K/4000K	20°	On/off
B5HA1-39520-DN	2600lm	39W	2700K/3000K/4000K	20°	DALI 2
B5HA1-39520-WN	2600lm	39W	2700K/3000K/4000K	20°	Wireless
B5HA1-39540-NN	2328lm	39W	2700K/3000K/4000K	34°	On/off
B5HA1-39540-DN	2328lm	39W	2700K/3000K/4000K	34°	DALI 2
B5HA1-39540-WN	2328lm	39W	2700K/3000K/4000K	34°	Wireless
B5HA1-39550-NN	2000lm	39W	2700K/3000K/4000K	48°	On/off
B5HA1-39550-DN	2000lm	39W	2700K/3000K/4000K	48°	DALI 2
B5HA1-39550-WN	2000lm	39W	2700K/3000K/4000K	48°	Wireless

SIZE



LIGHT DISTRIBUTION

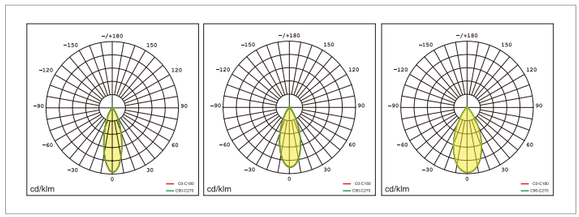






HALO-0


PRODUCT MODEL

Part No.	LM	Power	CCT	Beam Angle	Dimming
B5HA0-13520-NN	1069lm	13W	2700K/3000K/4000K	20°	On/off
B5HA0-13540-NN	1105lm	13W	2700K/3000K/4000K	34°	On/off
B5HA0-13550-NN	1173lm	13W	2700K/3000K/4000K	48°	On/off

LIGHT DISTRIBUTION

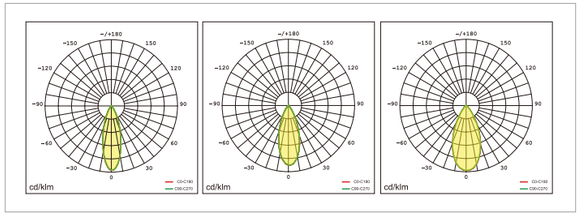

SIZE



05
WALL RECESSED LUMINAIRES

Safe series is a step lamp with a special optical design, and with a simple shape and rich texture. It is composed of die-casting aluminium parts, PC lenses and engineering plastic parts. The special surface treatment process for outdoor lamps makes the lamps have good weather resistance, and the protection grade is IP65.

Safe Step Light Series is available in square and rectangular shapes.
The unique optical design makes the light outlet of the lamp small. With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity. It supports 1-10V dimming and Dali2 dimming.

We offer 5-year warranty. It can be applicable for indoor and outdoor use lighting purpose, wall path lighting, etc.



WALL RECESSED LUMINAIRES



SAFE-S



SAFE-O

Luminaire Wattage	4W	7W/ 8W
Luminous Flux	296lm	360lm
optics	Asymmetric optics	Asymmetric optics
CRI	>80	>80
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Function	On/off / 1-10V / DALI	On/off / 1-10V / DALI
Sensor	No	No
Protection Level	IP65/ IK08	IP65/ IK05
Colours		

SAFE-S

APPLICATIONS:
It can be applicable for indoor and outdoor lighting purpose,wall path lighting, etc.

IP65 IK08



- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.










SAFE-S


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SS0-04250-NN	296lm	4W	2700K	On/off
B2SS0-04350-NN	296lm	4W	3000K	On/off
B2SS0-04550-NN	296lm	4W	4000K	On/off
B2SS0-04250-VN	296lm	4W	2700K	1-10V
B2SS0-04350-VN	296lm	4W	3000K	1-10V
B2SS0-04550-VN	296lm	4W	4000K	1-10V
B2SS0-04250-DN	296lm	4W	2700K	DALI 2
B2SS0-04350-DN	296lm	4W	3000K	DALI 2
B2SS0-04550-DN	296lm	4W	4000K	DALI 2

LIGHT DISTRIBUTION

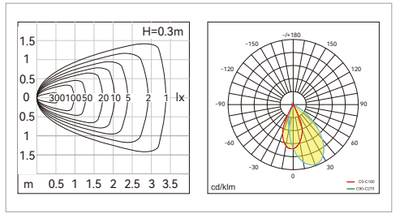

SIZE




SAFE-O

APPLICATIONS:
It can be applicable for indoor and outdoor lighting purpose.wall path lighting, etc.

IP65 IK08

- With the micro structure design of the light outlet, the lamp has no glare, with large light coverage and high uniformity.
- Sufficient position of knock-out holes ensure different wiring directions

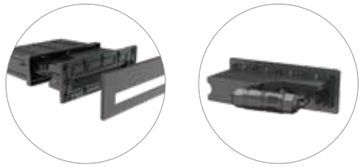








SAFE-O


PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B2SO0-07250-NN	360lm	7W	2700K	On/off
B2SO0-07350-NN	360lm	7W	3000K	On/off
B2SO0-07550-NN	360lm	7W	4000K	On/off
B2SO0-08250-VN	360lm	8W	2700K	1-10V
B2SO0-08350-VN	360lm	8W	3000K	1-10V
B2SO0-08550-VN	360lm	8W	4000K	1-10V
B2SO0-08250-DN	360lm	8W	2700K	DALI 2
B2SO0-08350-DN	360lm	8W	3000K	DALI 2
B2SO0-08550-DN	360lm	8W	4000K	DALI 2

LIGHT DISTRIBUTION

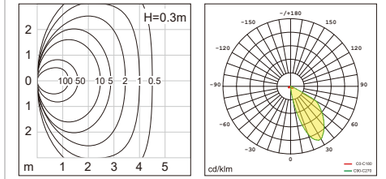

SIZE



06
TABLE LAMPS

NATURE T is a portable and rechargeable desk lamp with a compact and exquisite design that can last for 8 hours (±1 hours) at full power.

It is controlled by the touch button on the top of the lamp to switch on and switch off the lamp and adjust its brightness.

NATURE T's excellent optical design with a wide range of irradiation, IP65/IK08, meets various indoor and outdoor lighting needs

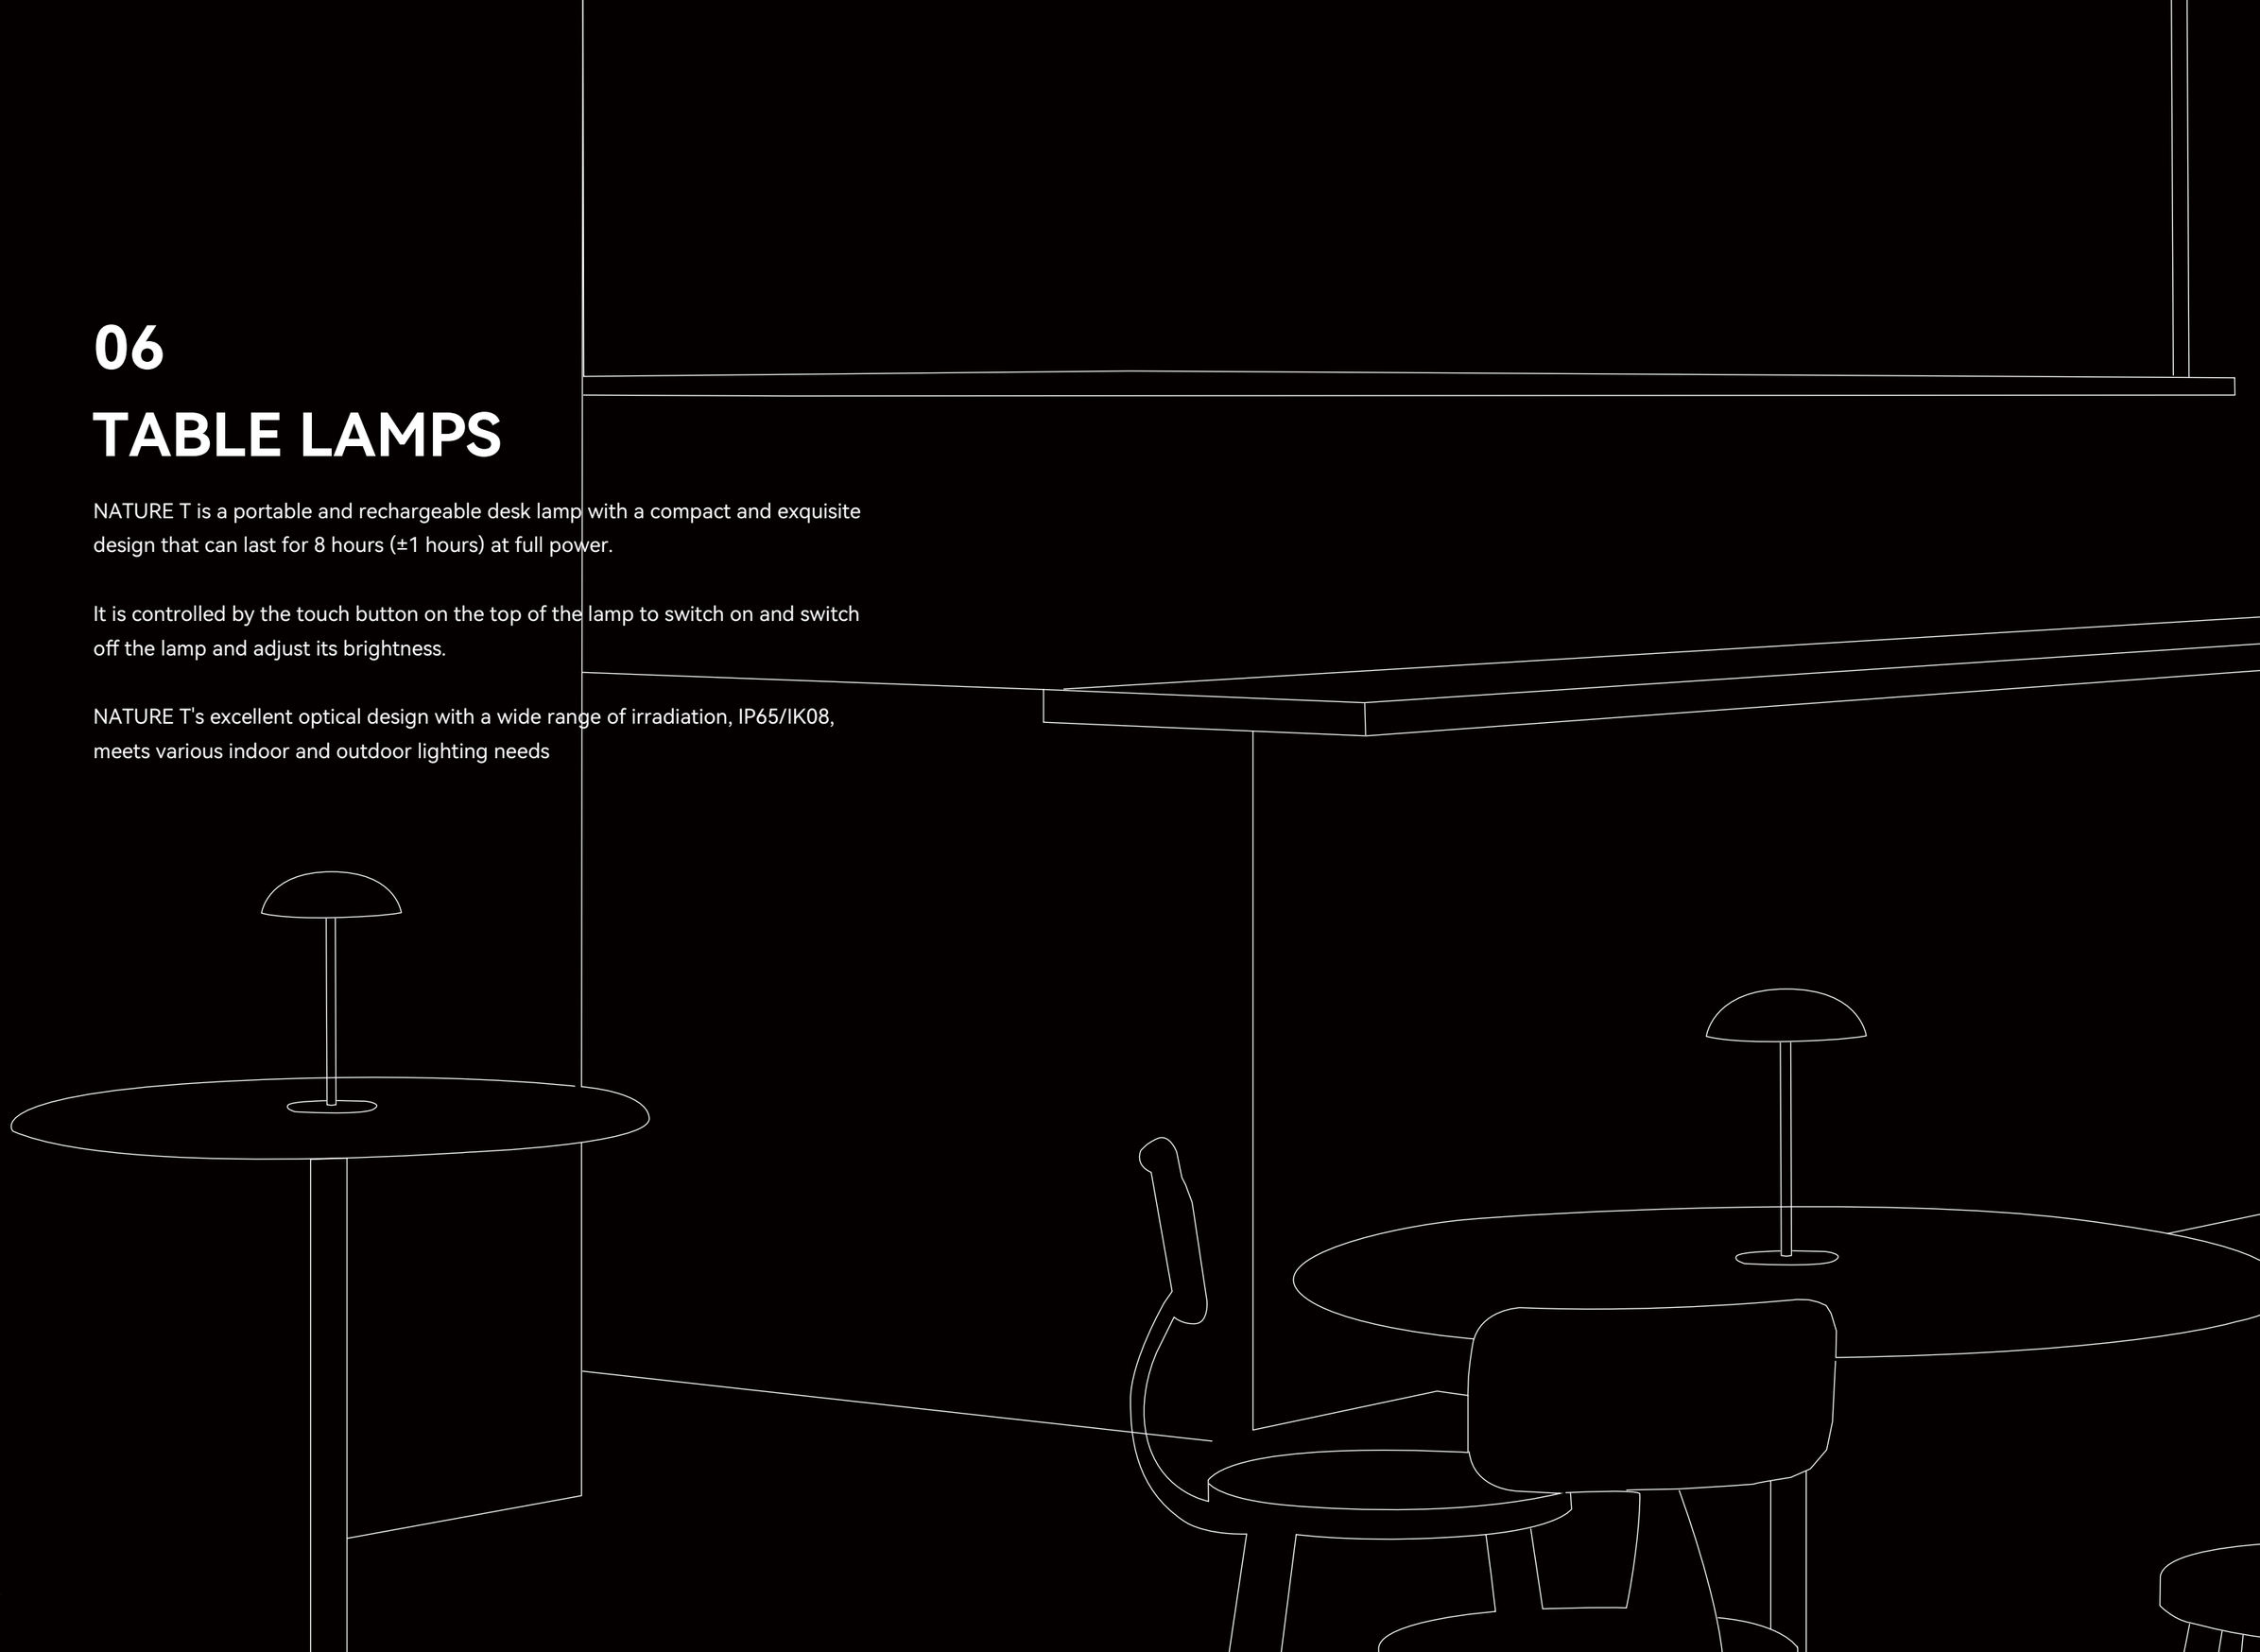


TABLE LAMPS



PUDDING



NATURE-T

Luminaire Wattage	4W	4W
Luminous Flux	400lm	344lm
optics	130°	145°
CRI	>90	>90
CCT	2700K/ 3000K/ 4000K	2700K/ 3000K/ 4000K
Dimming	Touch dimming	Touch dimming
Batte Run time	6-8 hours	8 hours
Protection Level	IP65/ IK06	IP65/ IK08
Colours		

PUDDING

NEW

APPLICATIONS:
Meet various indoor and outdoor lighting needs

IP54 IK06


- Specially designed for courtyard gatherings;
- Magnetic mounting with multiple installation for indoor/outdoor applications;
- Optical lens with subtle sidelight emission, deliver comfortable light;
- 4.75 hours quick-charging battery delivering 6-8 hours of continuous operation;
















PUDDING

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9PU0-04280-TN	400lm	4W	2700K	Touch dimming
B9PU0-04380-TN	400lm	4W	3000K	Touch dimming
B9PU0-04580-TN	400lm	4W	4000K	Touch dimming

SIZE



NATURE-T

APPLICATIONS:
Meet various indoor and outdoor lighting needs

IP65 IK08

- At full power can be used for 8 hours (±1 hours)
- 145°Wide beam angle, Provide wide light distribution
- charge with a Type C cable
- Lamp head is detachable








NATURE-T

PRODUCT MODEL

Part No.	LM	Power	CCT	Dimming
B9NT0-04280-TN	344lm	4W	2700K	Touch dimming
B9NT0-04380-TN	344lm	4W	3000K	Touch dimming
B9NT0-04580-TN	344lm	4W	4000K	Touch dimming

SIZE



LIGHT DISTRIBUTION

