

AMEZEUS

CATALOGUE PRODUITS

ÉCLAIRAGE URBAIN ET ARCHITECTURAL

Luminaires pour les espaces publics.
Des solutions d’éclairage urbain et architectural.

Route de Taillepied 44
1095 Lutry, Suisse

direction@amezeus.com

+41 21 903 57 67
amezeus.com

BRANCH



DESCRIPTION

The shape of Branch was inspired by the crown of a pine tree. The lighting elements of the Branch luminaire head can be freely directed because of their special ball joint, making it possible to create a unique apearance just like the random composition of tree branches found in nature. This further enables to light, for example, a walkway, surrounding buildings, as well as other objects all at the same time. The number of LED profiles in the crown of Branch can be varied according to the design needs and the goals of the specific lighting solution in question.

Branch features our own aluminium profile with LED lighting called Wannabe. Its aluminium body is anodized in black. Wannabe features a single fully tempered glass plate with antireflective coat- ing. It has a unique joint system which connects the profile to the luminaire head. This joint allows the profile to be adjusted freely on its horizontal axes, which means that its light can be directed in any desired direction. In addition to this, it is possible to customise the optics of Wannabe to create the most optimal lighting solution.

The Branch luminaire head is made from powder painted aluminium, which comes in graphite black (RAL 9011), either mat or glossy, to match the black anodized alumium of the Wannabe profiles.


Branch comes with a straight conical pole with a height of 4, 5 or 6 meters. The pole is made from galvanized steel and also powder painted in graphite black (RAL 9011) to match the Wannabe profiles and the luminaire head.

The LED driver for Branch is located inside the pole for easy access and maintanence. DALI com- patible drivers are available. Luminaires are available in Zhaga compatible version.

DESIGNER

Margus Triibmann

DIMENSIONS

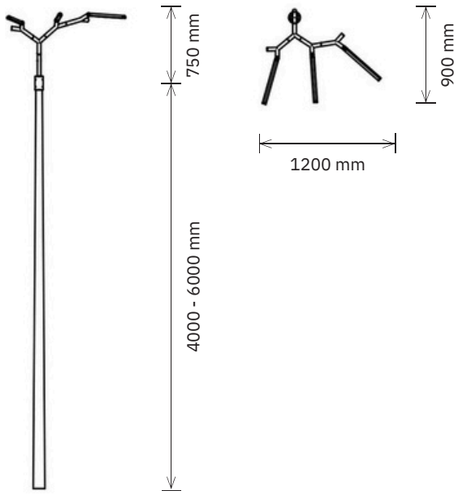

TECHNICAL INFORMATION

Product code	LO-BR-03
Light source	LED
Number of lighting elements	3
Max light output (lm)	6725
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	70
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	5

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS


~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE





DIMENSIONS

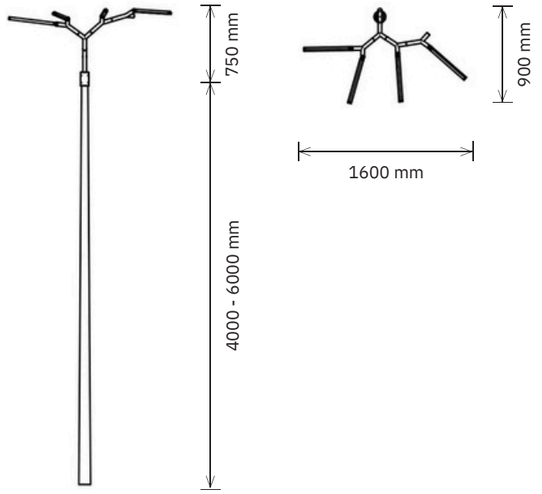

TECHNICAL INFORMATION

Product code	LO-BR-04
Light source	LED
Number of lighting elements	4
Max light output (lm)	8970
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	93
Supply voltage	100...240VAC
Supply frequency	50 . . . 60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	7

MATERIAL


LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE

DIMENSIONS

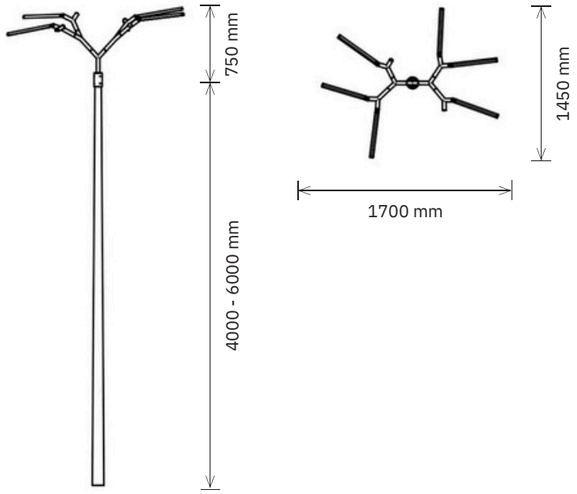

TECHNICAL INFORMATION

Product code	LO-BR-06
Light source	LED
Number of lighting elements	6
Max light output (lm)	13500
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	140
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	10

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS


~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE





REED

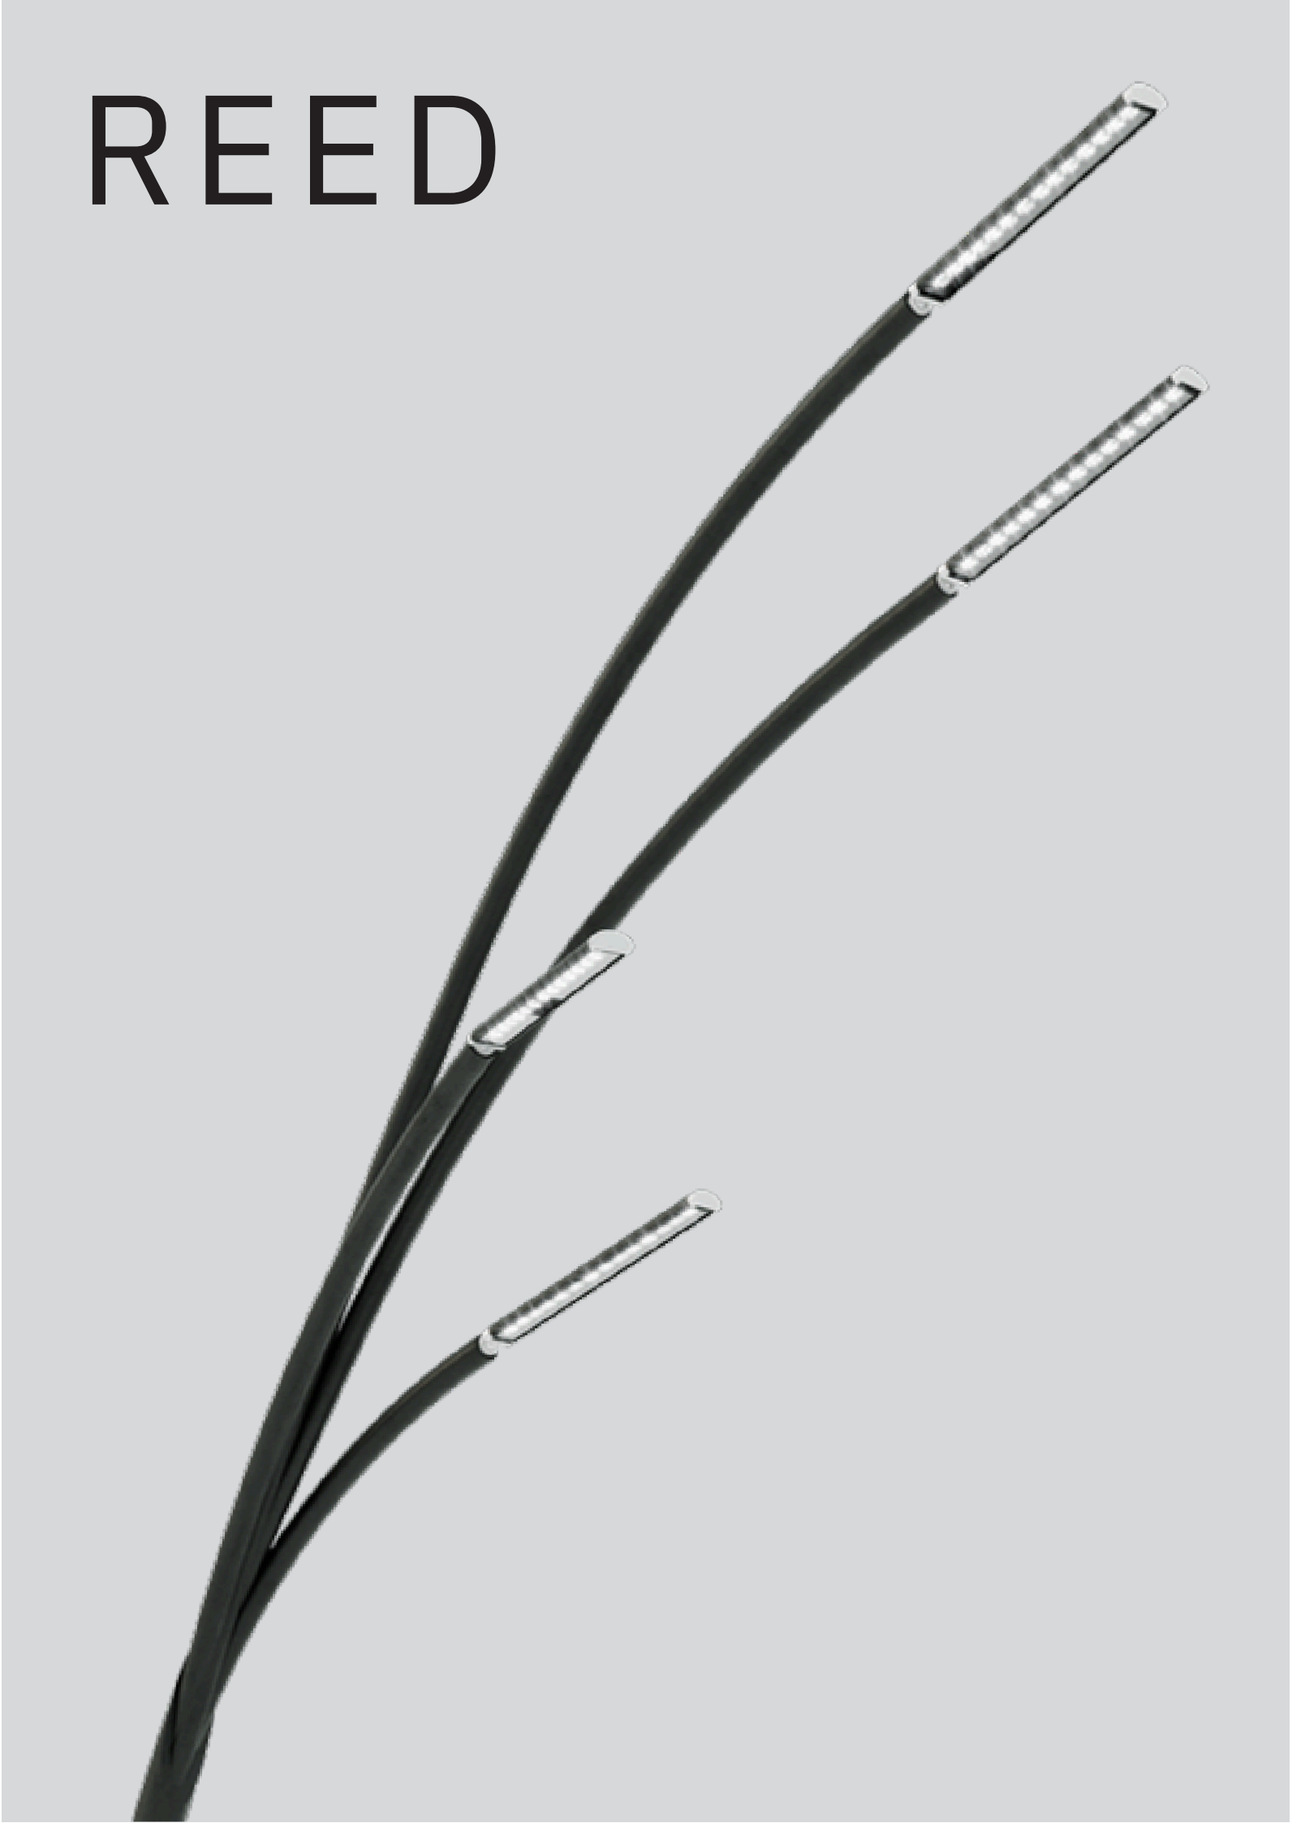

DESCRIPTION

Reed is inspired by the plants with the same name found at coastlines and riverbanks. This shape is especially suitable for installations in marina and parks near the coast but will not look out of place inland.

Reed features our own aluminium profile with LED lighting called Wannabe. Its aluminium body is anodized in black. Wannabe features a single fully tempered glass plate with antireflective coating. It has a unique joint system which connects the profile to the luminaire head. This joint allows the profile to be adjusted freely on its horizontal axes, which means that its light can be directed in any desired direction. In addition to this, it is possible to customise the optics of Wannabe to create the most optimal lighting solution.

The Reed luminaire head is made from powder painted stainless steel, which comes in graphite black (RAL 9011), either mat or glossy, to match the black anodized alumium of the Wannabe profiles.


Reed comes with a curved pole between 4 and 6 meters which is made from galvanized steel and also powder painted in graphite black (RAL 9011) to match the Wannabe profiles and the lumi- naire head.

The LED driver for Reed is located inside the pole for easy access and maintanence. DALI compatible drivers are available.

DESIGNER

Margus Triibmann

DIMENSIONS

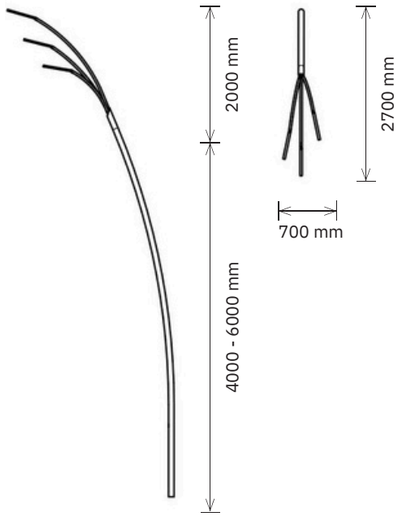

TECHNICAL INFORMATION

Product code	LO-RE-03
Light source	LED
Number of lighting elements	3
Max light output (lm)	6725
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	70
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	6

MATERIAL


LED-profile	Anodized aluminium
Luminaire head	Powder painted stainless steel
Conical post	Galvanized and powder painted steel

COLORS


~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE



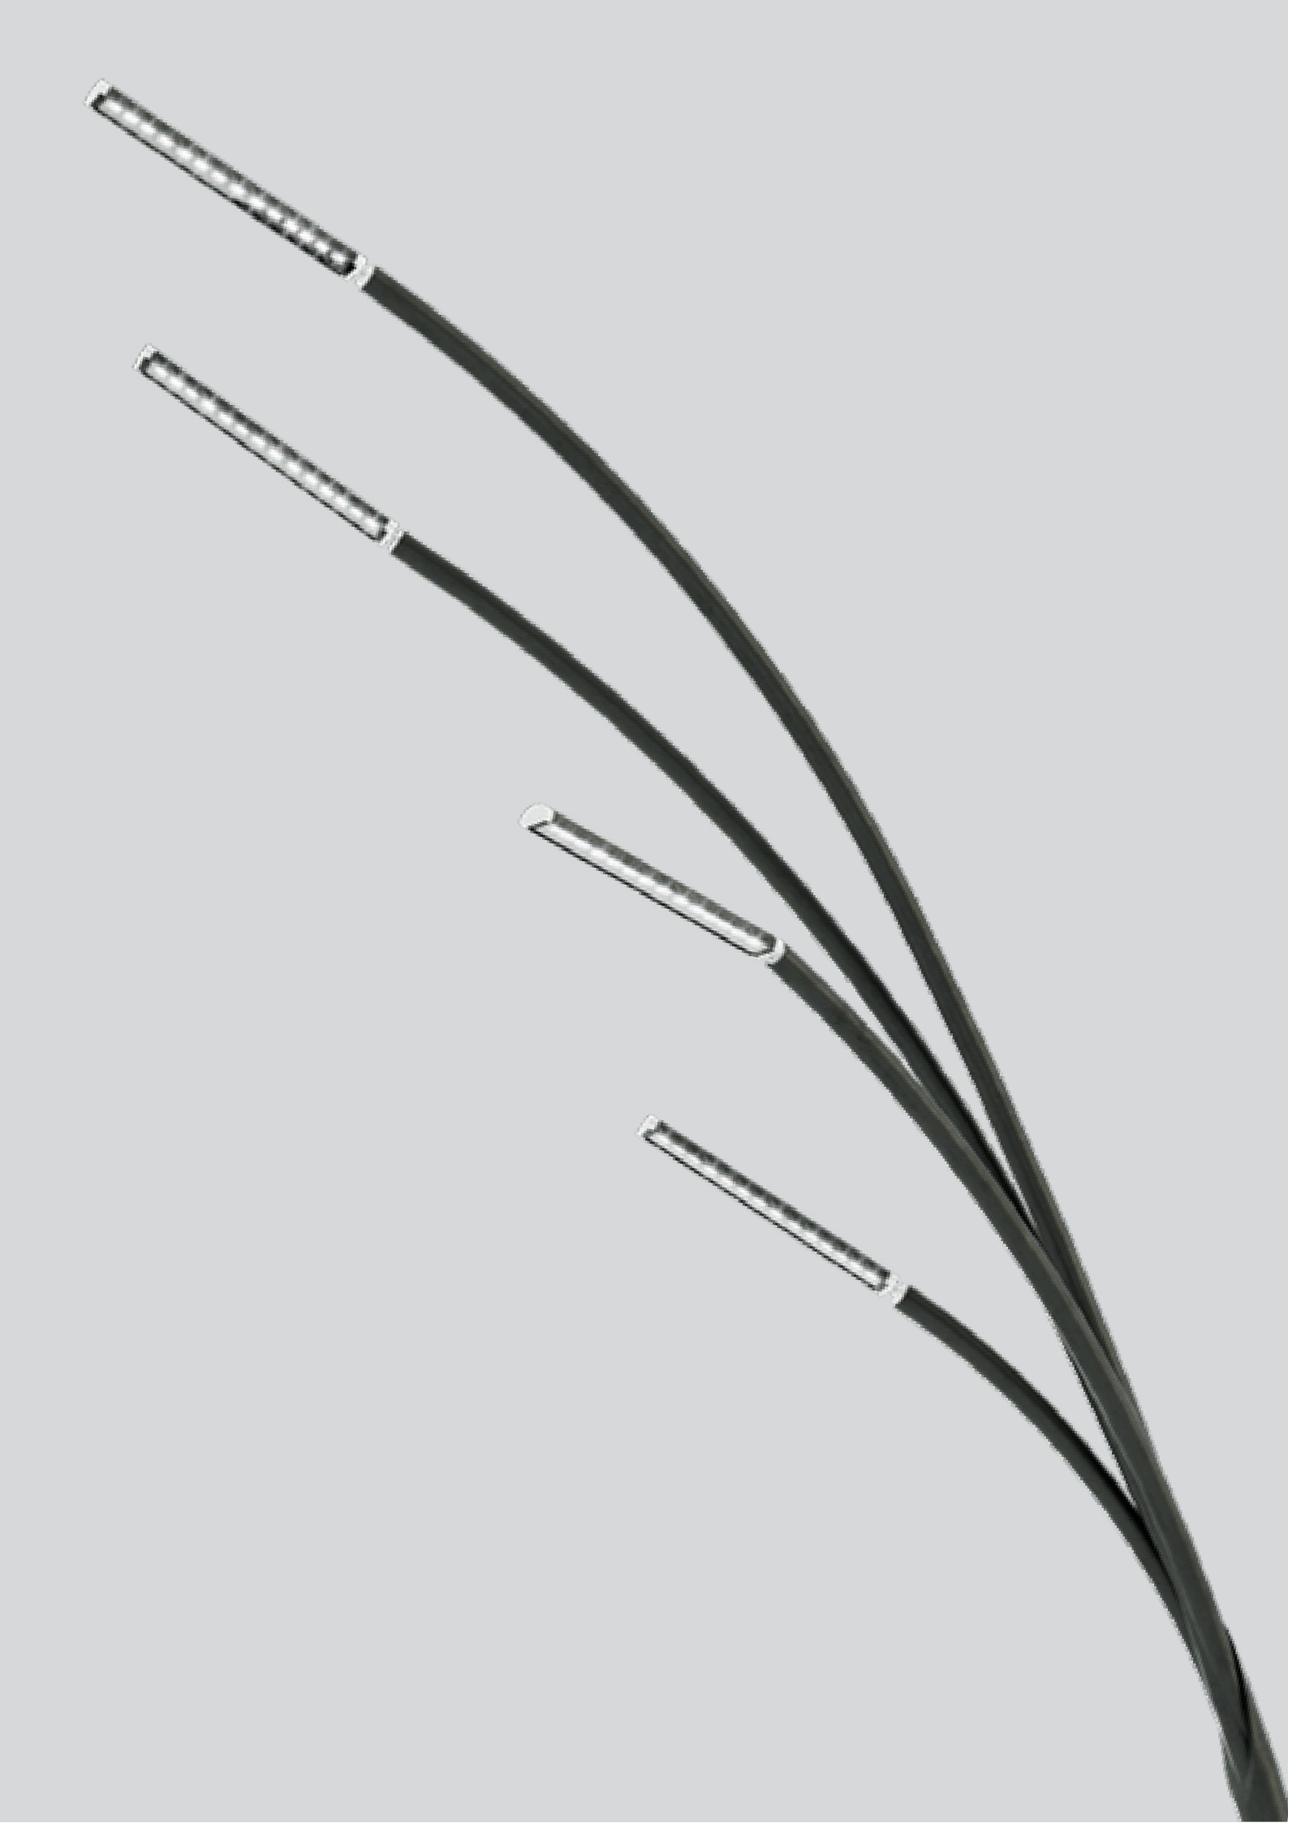

DIMENSIONS

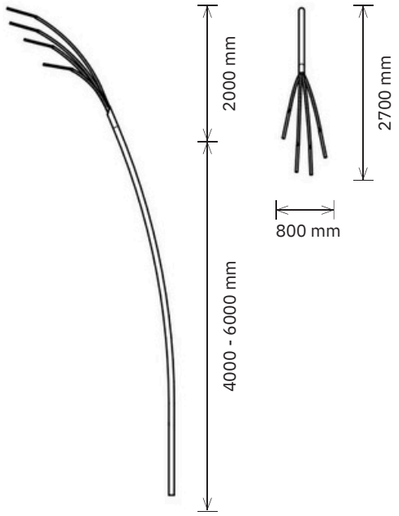

TECHNICAL INFORMATION

Product code	LO-RE-04
Light source	LED
Number of lighting elements	4
Max light output (lm)	8970
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	93
Supply voltage	100...240VAC
Supply frequency	50 . . . 60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	8

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted stainless steel
Conical post	Galvanized and powder painted steel

COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE


KÕRVEKÜLA PÕHIKOO

TROPHY



DESCRIPTION

Trophy is a sculptural wall light made from modular Y-shaped components, allowing for bold, customizable configurations. Available in standard versions with 3 to 5 LED profiles, the system can be stacked, angled, or arranged to create striking compositions across the wall.


At the core of Trophy is our custom Wannabe aluminium LED profile, connected via a ball joint that enables precise light direction. Whether for ambient glow or focused illumination, Trophy delivers both flexibility and visual impact.

Manufactured from powder-coated aluminium in RAL 9005 (matte or glossy), the fixture mounts directly to the wall with discreet screws. The integrated LED driver is housed in the “knapsack” element, which opens from the bottom—making maintenance simple without disrupting the form.

DESIGNER

Margus Triibmann

DIMENSIONS

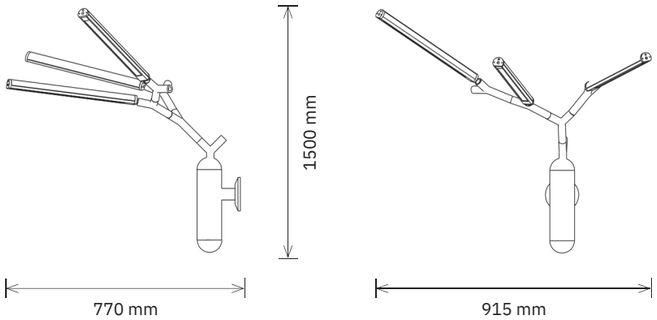

TECHNICAL INFORMATION

Product code	LO-TR-03
Light source	LED
Number of lighting elements	3
Max light output (lm)	6725
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	70
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (kg)	6

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium

COLORS


LED-profile	Black anodized
Luminaire head	Graphite black (RAL 9011)

CE





BLACKBIRD

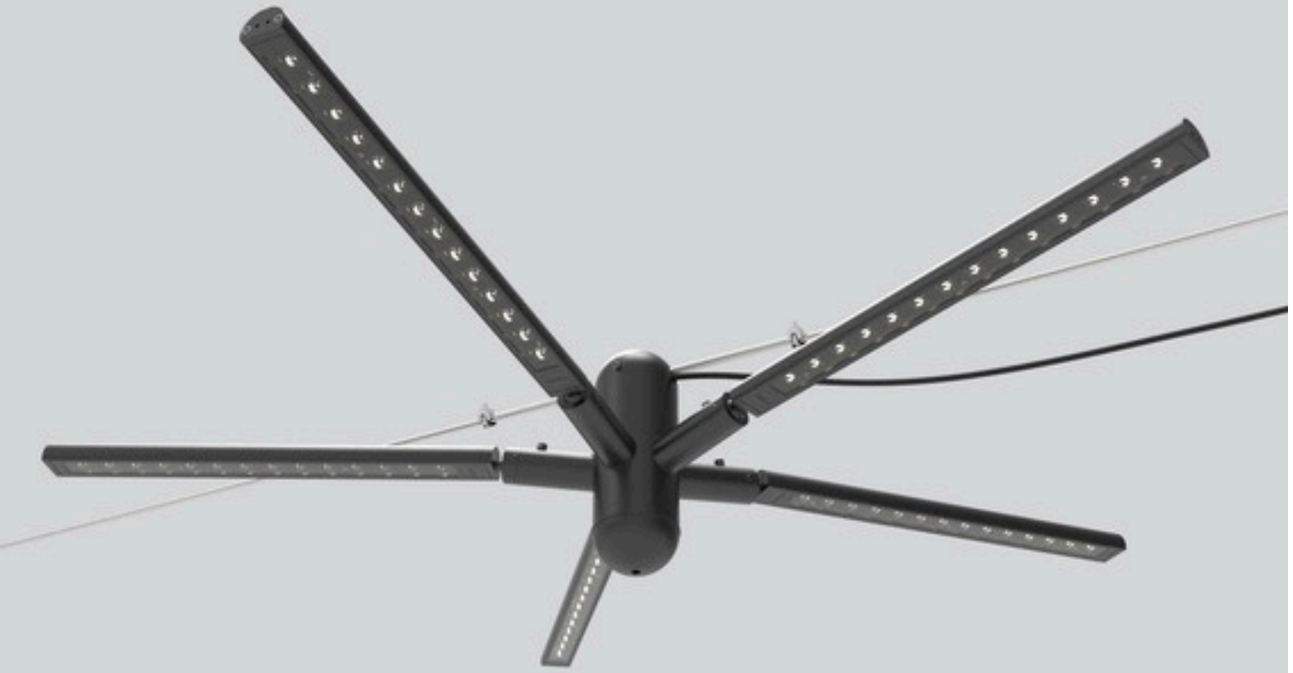

DESCRIPTION

The shape of Blackbird was inspired by the bird species of the same name. The hanging street light has five LED profiles which can be freely directed because of their special ball joint, making it possible to create a unique apearance to mimic a flying bird. This further enables to light, for exam- ple, a walkway, surrounding buildings, as well as other objects all at the same time. The number of LED profiles in the crown of Blackbird can be varied according to the design needs and the goals of the specific lighting solution in question.

Blackbird features our own aluminium profile with LED lighting called Wannabe. Its aluminium body is anodized in black. Wannabe features a single fully tempered glass plate with antireflective coating. It has a unique joint system which connects the profile to the luminaire head. This joint allows the profile to be adjusted freely on its horizontal axes, which means that its light can be directed in any desired direction. In addition to this, it is possible to customise the optics of Wan- nabe to create the most optimal lighting solution.


Blackbird luminaire body is made from powder painted aluminium, which comes in graphite black (RAL 9011), either mat or glossy, to match the black anodized alumium of the Wannabe profiles.

The LED driver for Blackbird is located inside the knapsack for easy access and maintanence. DALI compatible drivers are available.

DESIGNERS

Margus Triibmann & UN-LIKE

DIMENSIONS

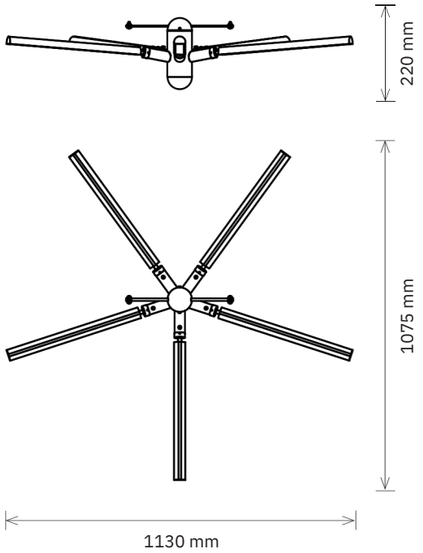

TECHNICAL INFORMATION

Product code	LO-BB-05
Light source	LED
Number of lighting elements	5
Max light output (lm)	2340
Color rendering index (CRI)	≥80
Color temperature (K)	3000
Power consumption (W)	28
Supply voltage	230 AC
Supply frequency (Hz)	50
Working temperature Ta	-30 . . . +45°C
IP rating	66
IK rating	8
Weight	5

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium

COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)

CE



CITY



DESCRIPTION

City is a modernized and minimal version of a traditional 18th and 19th centuries gas lamp. With its minimal look, City is suitable in environments where preservation of the past and heritage is important and today’s highly technological and contemporary street lightings would come across too intense. City is available in configurations with 3 or 4 LED profiles, creating either a triangle or a square with the profiles.

City features our own aluminium profile with LED lighting called Wannabe. Its aluminium body is anodized in black. Wannabe features a single fully tempered glass plate with antireflective coating. It has a unique joint system which connects the profile to the luminaire head. This joint allows the profile to be adjusted freely on its horizontal axes, which means that its light can be directed in any desired direction. In addition to this, it is possible to customise the optics of Wannabe to create the most optimal lighting solution.

The City luminaire head is made from powder painted aluminium, which comes in graphite black (RAL 9011), either mat or glossy, to match the black anodized alumium of the Wannabe profiles. It’s suited for lamp posts with a 60 milimeter diameter spigot


City comes with a conical pole of either 4, 5 or 6 meters which is made from galvanized steel and also powder painted in graphite black (RAL 9011) to match the Wannabe profiles and the lumi- naire head. Poles in different shapes and sized are available upon request.

The LED driver for City is located inside the pole for easy access and maintanence. DALI compat- ible drivers are available. In addition, a Casambi controll system can be added. Triangle is further available in a Zhaga compatible version.

DESIGNER

Margus Triibmann

DIMENSIONS

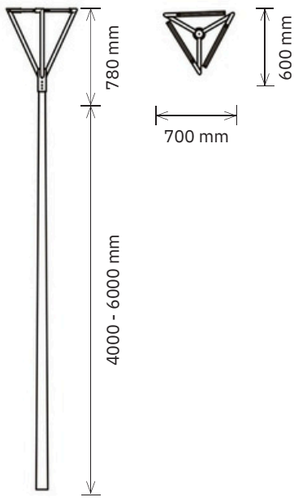

TECHNICAL INFORMATION

Product code	LO-CI-03
Light source	LED
Number of lighting elements	3
Max light output (lm)	6725
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	70
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	5

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS


~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE





DIMENSIONS

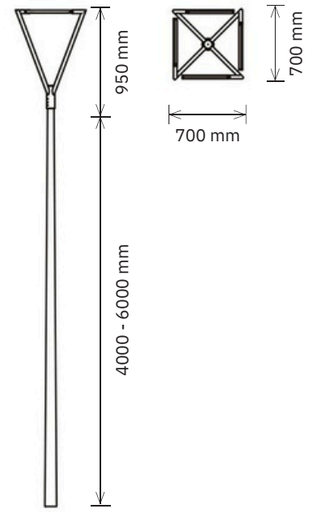

TECHNICAL INFORMATION

Product code	LO-CI-04
Light source	LED
Number of lighting elements	4
Max light output (lm)	8970
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	93
Supply voltage	100...240VAC
Supply frequency	50 . . . 60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	8

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE







CROWN



DESCRIPTION

The Crown Street Luminaire’s design is inspired by the regal and majestic contours of a crown, with added curvatures that soften its overall aesthetic. LED profiles are attached onto the head of the luminaire. The number of LED profiles can be customized to meet specific design requirements and lighting objectives.


Crown features our aluminium profile with LED lighting called Wannabe. Its aluminium body is anodised in black. Wannabe features a single fully tempered glass plate with anti-reflective coating. It has a unique joint system which connects the profile to the luminaire head. It is possible to customise the optics of Wannabe to create the most optimal lighting solution.

The Crown luminaire head is made from powder painted aluminium, which comes in graphite black (RAL 9011), either mat or glossy, to match the black anodised aluminium of the Wannabe profiles.

Crown comes with a straight conical pole with a height of 4, 5 or 6 meters. The pole is made from galvanised steel and also powder painted in graphite black (RAL 9011) to match the Wannabe profiles and the luminaire head.

The LED driver for Crown is located inside the pole for easy access and maintenance. DALI-compatible drivers are available. Luminaires are available in a Zhaga-compatible version.

DIMENSIONS

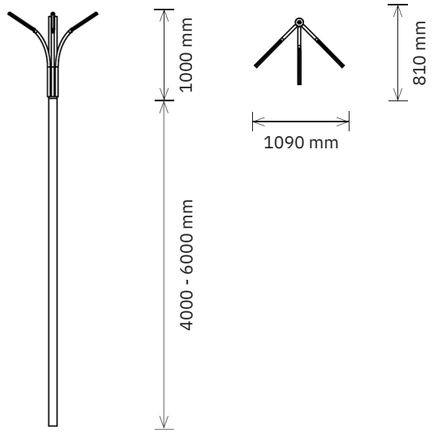

TECHNICAL INFORMATION

Product code	LO-CR-03
Light source	LED
Number of lighting elements	3
Max light output (lm)	6725
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	70
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	5


MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE

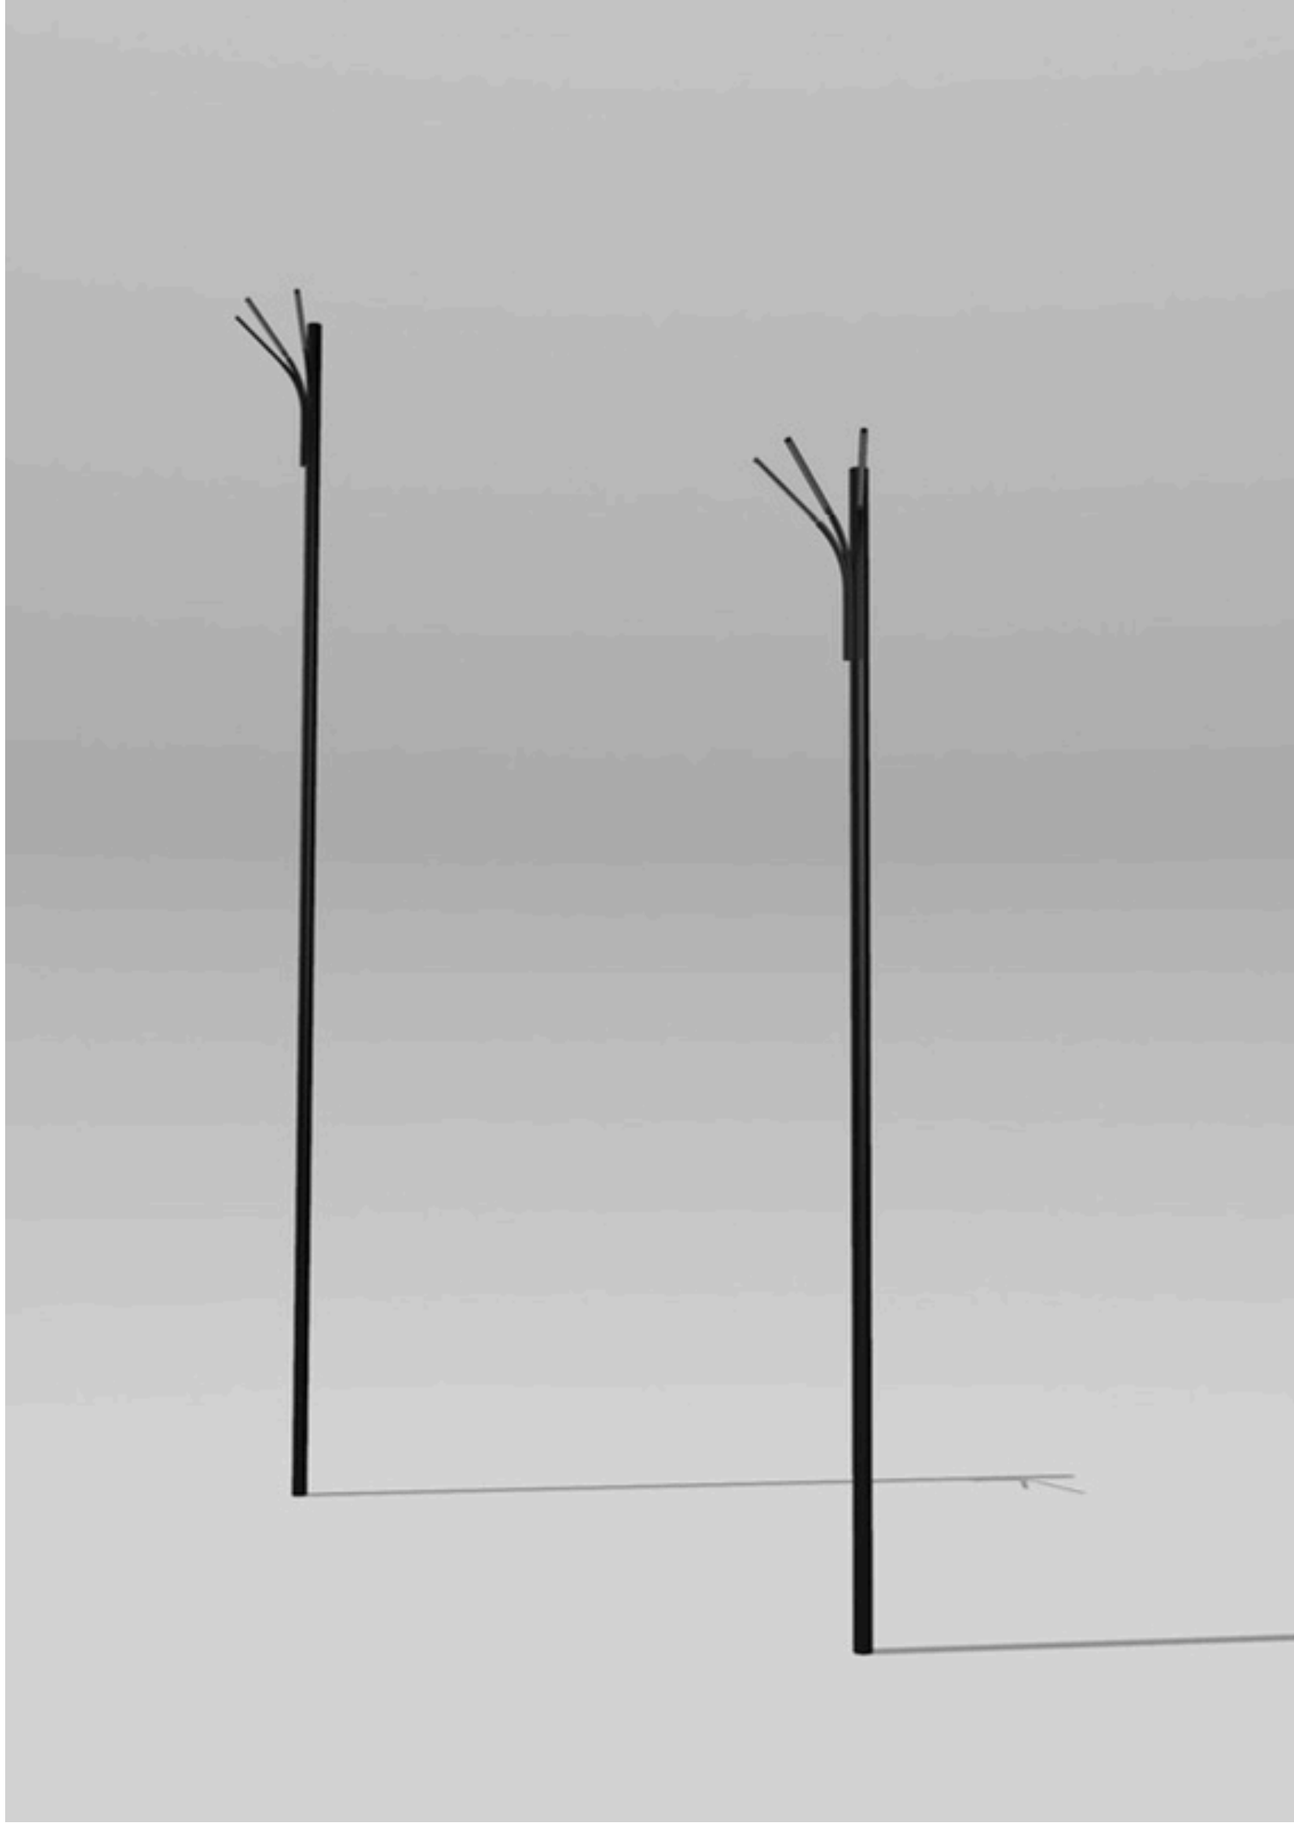

HISTORIC



DESCRIPTION

Historic is a modernized version of a traditional 18th and 19th centuries gas lamp. With its traditional look, Historic is suitable in environments where preservation of the past and heritage is important and today’s highly technological and contemporary street lightings would come across too intense. Historic is available in configurations with 3 or 4 LED profiles, creating either a triangle or a square with the profiles.

Historic features our own aluminium profile with LED lighting called Wannabe. Its aluminium body is anodized in black. Wannabe features a single fully tempered glass plate with antireflective coat- ing. It has a unique joint system which connects the profile to the luminaire head. This joint allows the profile to be adjusted freely on its horizontal axes, which means that its light can be directed in any desired direction. In addition to this, it is possible to customise the optics of Wannabe to create the most optimal lighting solution.

The Historic luminaire head is made from powder painted aluminium, which comes in graphite black (RAL 9011), either mat or glossy, to match the black anodized alumium of the Wannabe profiles. It’s suited for lamp posts with a 60 milimeter diameter spigot.


Historic comes with a conical pole of either 4, 5 or 6 meters which is made from galvanized steel and also powder painted in graphite black (RAL 9011) to match the Wannabe profiles and the luminaire head. Poles in different shapes and sized are available upon request.

The LED driver for Historic is located inside the pole for easy access and maintanence. DALI compatible drivers are available. In addition, a Casambi controll system can be added. Triangle is further available in a Zhaga compatible version.

DESIGNER

Margus Triibmann

DIMENSIONS

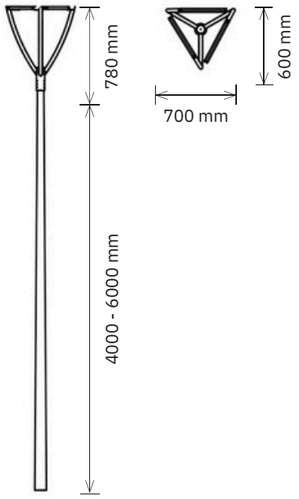

TECHNICAL INFORMATION

Product code	LO-HI-03
Light source	LED
Number of lighting elements	3
Max light output (lm)	6725
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	70
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	5

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS


~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE





DIMENSIONS

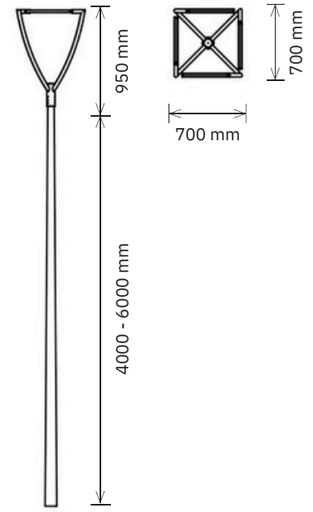

TECHNICAL INFORMATION

Product code	LO-HI-04
Light source	LED
Number of lighting elements	4
Max light output (lm)	8970
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	93
Supply voltage	100...240VAC
Supply frequency	50 . . . 60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	8

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE



CORNFLOWER



DESCRIPTION

Cornflower is designed to illuminate large urban spaces—broad squares, wide streets, and expansive promenades. As the name suggests, the concept draws inspiration from the traditional Estonian wildflower, reimagined as a bold, architectural light.


The fixture features our proprietary Wannabe aluminium LED profile, connected to the head via an adjustable ball joint. This allows the light direction to be fine-tuned with ease, offering precise and flexible illumination.


The head is manufactured from powder-coated aluminium in RAL 9011 (matte or glossy), paired with a standard straight pole ranging from 7 to 10 meters in height. The LED driver is housed within the pole, providing discreet integration and easy access for maintenance.

DESIGNER

Margus Triibmann

DIMENSIONS

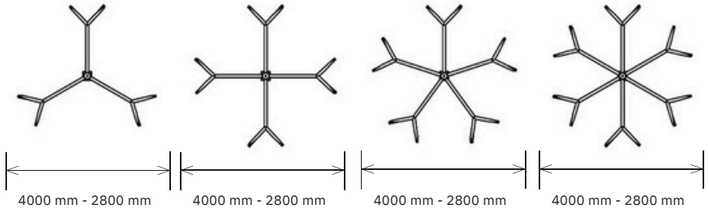

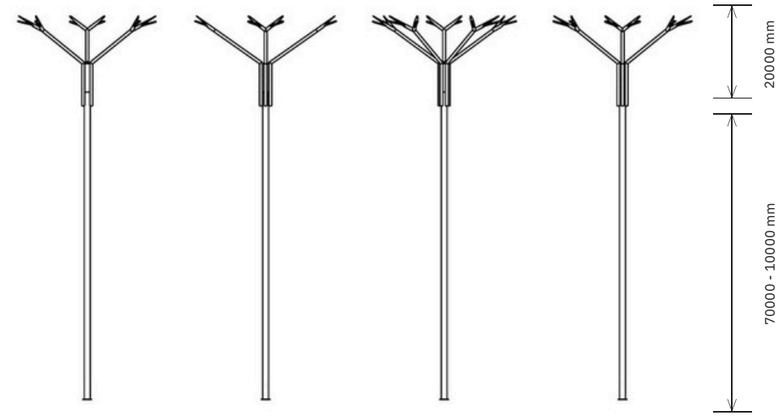

TECHNICAL INFORMATION

Product code	LO-CF-(06;08;10;12)
Light source	LED
Number of lighting elements	6, 8, 10, 12
Max light output (lm)	12300 - 24600
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	119 - 238
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	15 - 35

MATERIAL


LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

CE





TRIANGLE

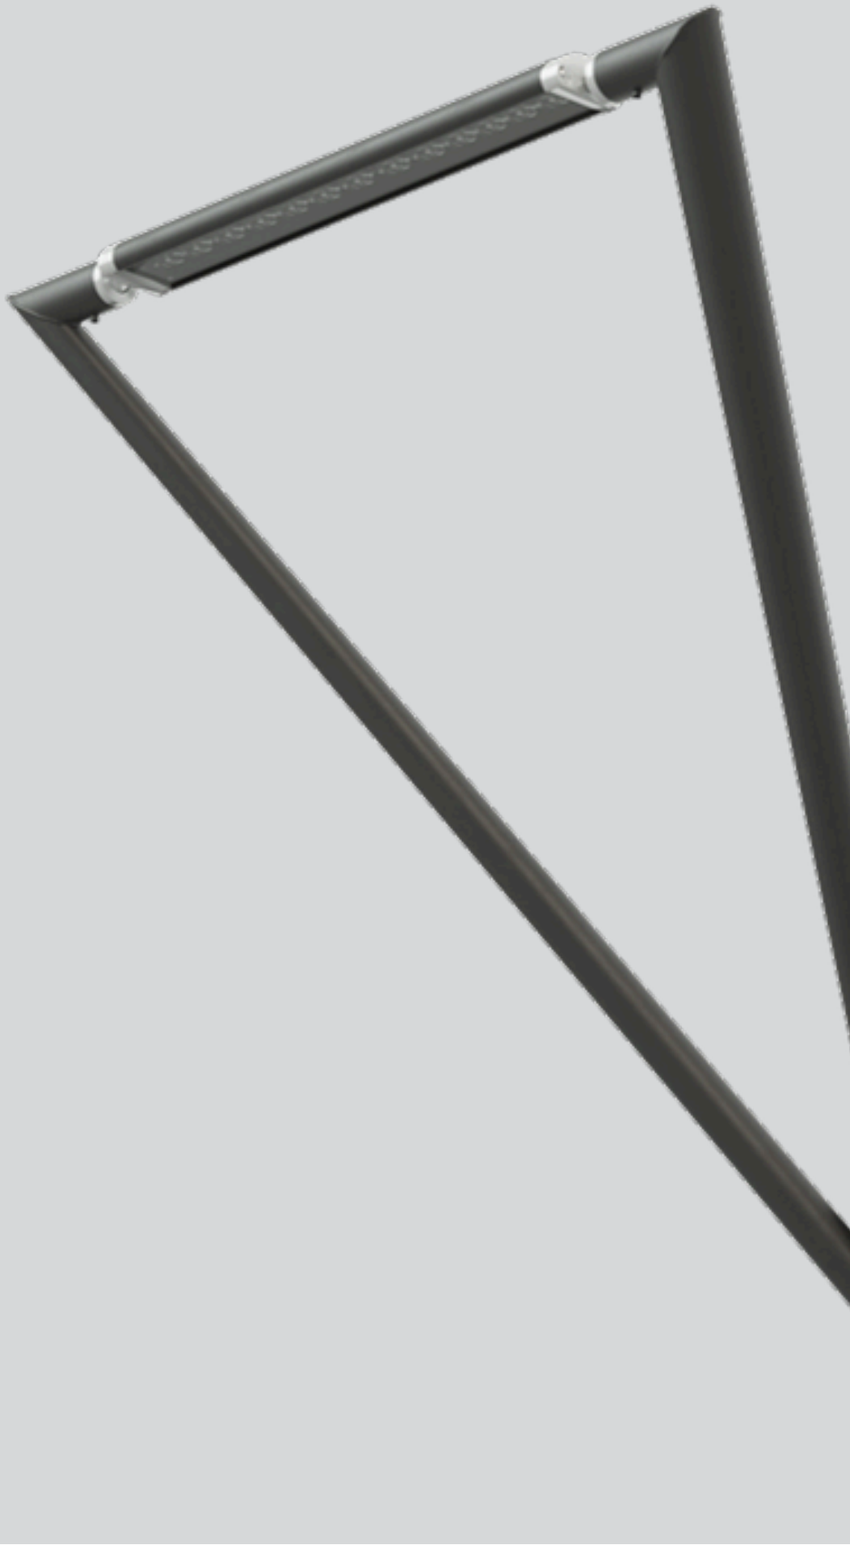

DESCRIPTION

Triangle is specifically designed for use in walkways and low traffic roadways. This design is Ke-ha3‘s alternative to the “shovel style“ street light often seen illuminating our streets.

Triangle features our own aluminium profile with LED lighting called Wannabe. Its aluminium body is anodized in black. Wannabe features a single fully tempered glass plate with antireflective coating. It has a unique joint system which connects the profile to the luminaire head. This joint allows the profile to be adjusted freely on its horizontal axes, which means that its light can be directed in any desired direction. In addition to this, it is possible to customise the optics of Wan- nabe to create the most optimal lighting solution.

The Triangle luminaire head is made from powder painted aluminium, which comes in graphite black (RAL 9011), either mat or glossy, to match the black anodized alumium of the Wannabe profiles.


Triangle comes with a conical pole between 4 and 6 meters which is made from galvanized steel and also powder painted in graphite black (RAL 9011) to match the Wannabe profiles and the luminaire head.

The LED driver for Triangle is located inside the luminaire head for easy access and maintanence. DALI compatible drivers are available. In addition, a Casambi controll system can be added. Trian-gle is further available in a Zhaga compatible version.

DESIGNER

Margus Triibmann

DIMENSIONS

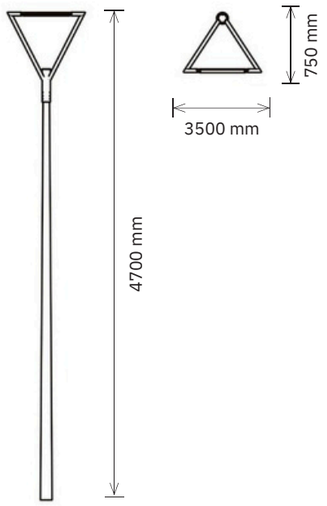

TECHNICAL INFORMATION

Product code	LO-TR-01
Light source	LED
Number of lighting elements	1
Max light output (lm)	2241
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	23
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	5

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel


COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE



DIMENSIONS

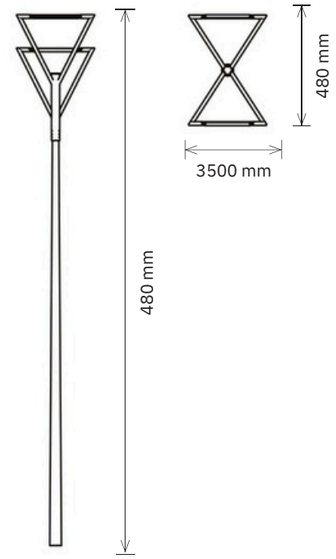

TECHNICAL INFORMATION

Product code	LO-TR-02
Light source	LED
Number of lighting elements	2
Max light output (lm)	4482
Color rendering index (CRI)	≥80
Color temperature (K)	3000/4000
Power consumption (W)	47
Supply voltage	100...240VAC
Supply frequency	50 . . . 60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	8
Weight (without pole, kg)	5

MATERIAL

LED-profile	Anodized aluminium
Luminaire head	Powder painted aluminium
Conical post	Galvanized and powder painted steel

COLORS

~~LED-profile~~	■ Black anodized
~~Luminaire head~~	■ Graphite black (RAL 9011)
~~Conical post~~	■ Graphite black (RAL 9011)

CE



TREE



DESCRIPTION

The shape of Tree was inspired by the crown of a pine tree. The lighting elements of Tree can be freely directed because of their special ball joint, making it possible to create a unique apearance just like the random composition of tree branches found in nature. This further enables to light, for example, a walkway, surrounding buildings, as well as other objects all at the same time.

The Tree outdoor luminaire features our own aluminium profile with LED lighting called Wannabe. Its aluminium body is anodized. Wannabe features a single fully tempered glass plate with antire-flective coating. It has a unique joint system which connects the profile to the luminaire head. This joint allows the profile to be adjusted freely on its horizontal axes, which means that its light can be directed in any desired direction. In addition to this, it is possible to customise the optics of Wannabe to create the most optimal lighting solution.


The Tree luminaire is made from powder painted steel, which comes in grey aluminium (RAL 9007), in mat, this creates a nicely toned combination with the anodized alumium of the Wannabe profiles. Tree has a slightly curved pole with a height of 5,5 meters.

The LED driver for Tree is located inside the pole for easy access and maintanence.

DESIGNER

Margus Triibmann

DIMENSIONS

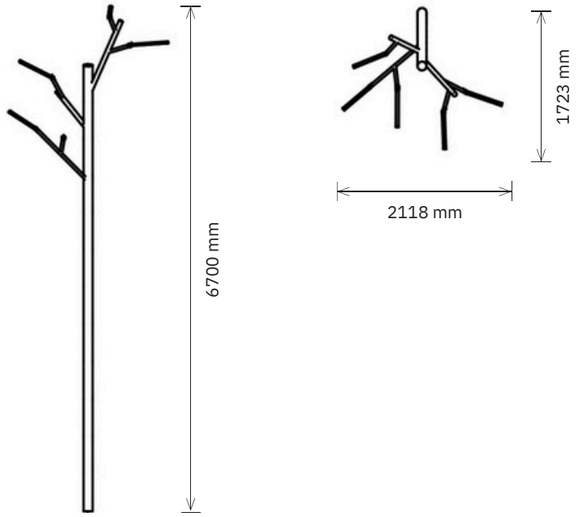

TECHNICAL INFORMATION

Product code	LO-TR-05-100
Light source	LED
Number of lighting elements	5
Max light output (lm)	9590
Color rendering index (CRI)	≥70
Color temperature (K)	4500
Power consumption (W)	70
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	66
IK rating	8
Weight (kg)	70


MATERIAL

LED-profile	Anodized aluminium
Luminaire body	Powder painted steel

COLORS

LED-profile	Black anodized
Luminaire body	Grey aluminium (RAL 9007)

CE

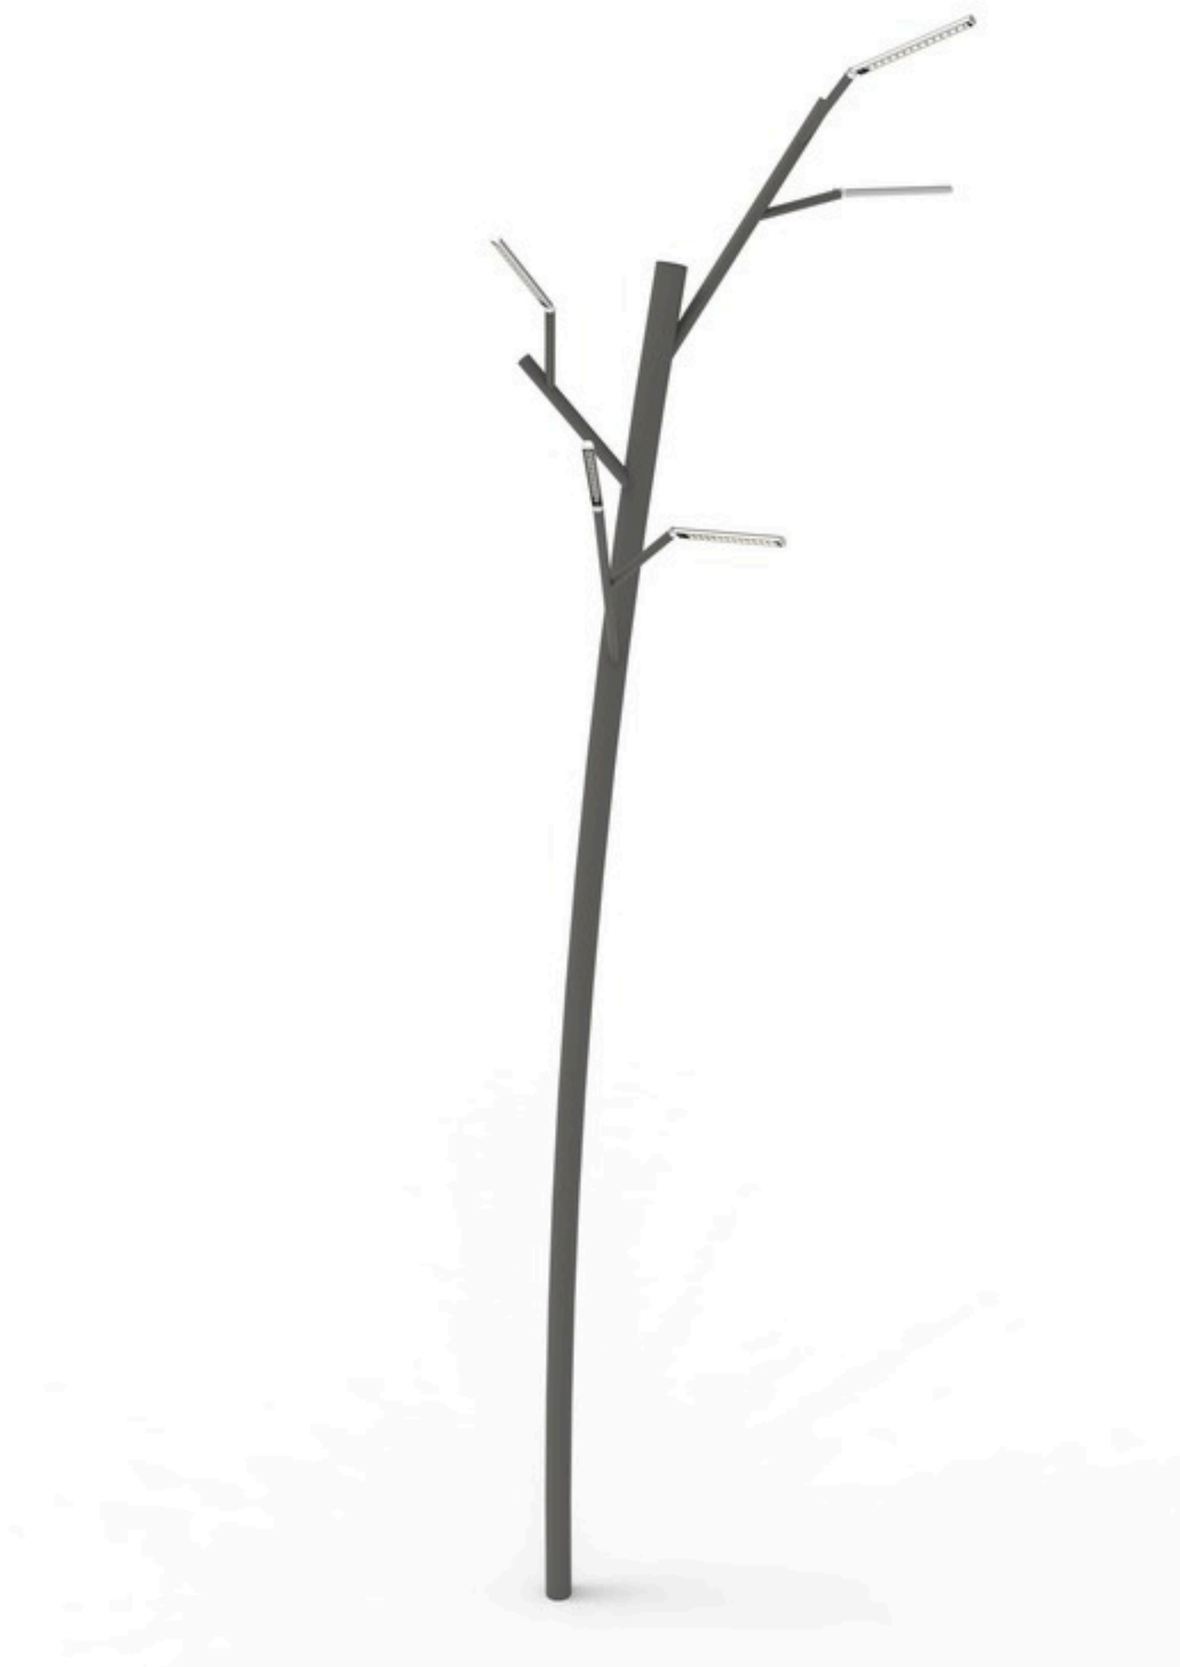





PROŽEKTOR



DESCRIPTION


The Prožektor-named streetlight is inspired by the classic form of a spotlight. The detailed retro-style luminaire dome combined with modern lighting technology supports, creates, and confirms local identity, while being in compliance with the technical conditions set by the city of Tallinn.


Prožektor light domes are mounted on a 5-meter high stainless steel pole. Different positional combinations can be created with the Prožektor light domes, with up to four domes attachable to one light pole. The inclination and direction of the domes can be set during installation as needed and then adjusted. The lights are equipped with Zhaga sockets.

DESIGNERS

Triinu Triibmann & Diederik Kales

DIMENSIONS



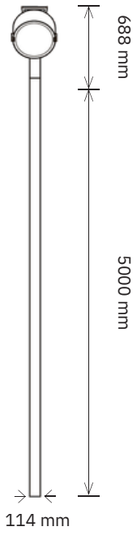

TECHNICAL INFORMATION

Product code	LO-PR-01
Lighting element	LED
Number of lighting elements	1
Maximum luminous flux (lm)	2400
Colour rendering index (CRI)	≥70
Colour temperature (K)	3000
Rated power (W)	22,5
Supply voltage	100...240VAC
Supply frequency (Hz)	50...60
Working temperature (Ta)	-30...+50°C
Moisture and dust resistance (IP)	66
Vandal resistance (IK)	08

MATERIAL

Lighting head	Stainless Steel
Lighting pole	Stainless Steel

COLOURS


Finish of metal parts	Brushed

* Please contact for alternative finishes and materials!

CE



DIMENSIONS

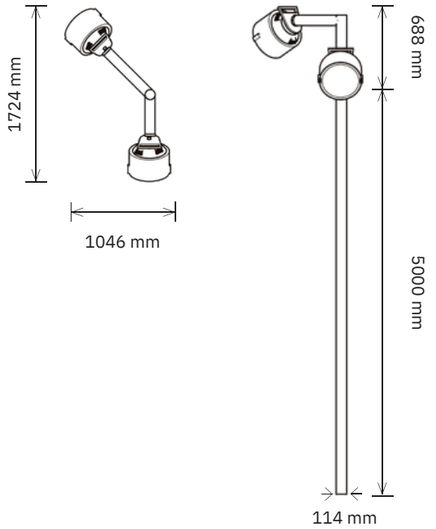

TECHNICAL INFORMATION

Product code	LO-PR-02
Lighting element	LED
Number of lighting elements	2
Maximum luminous flux (lm)	4800
Colour rendering index (CRI)	≥70
Colour temperature (K)	3000
Rated power (W)	45
Supply voltage	100...240VAC
Supply frequency (Hz)	50...60
Working temperature (Ta)	-30...+50°C
Moisture and dust resistance (IP)	66
Vandal resistance (IK)	08

MATERIAL

Lighting head	Stainless Steel
Lighting pole	Stainless Steel

COLOURS


Finish of metal parts	Brushed

* Please contact for alternative finishes and materials!

CE



DIMENSIONS

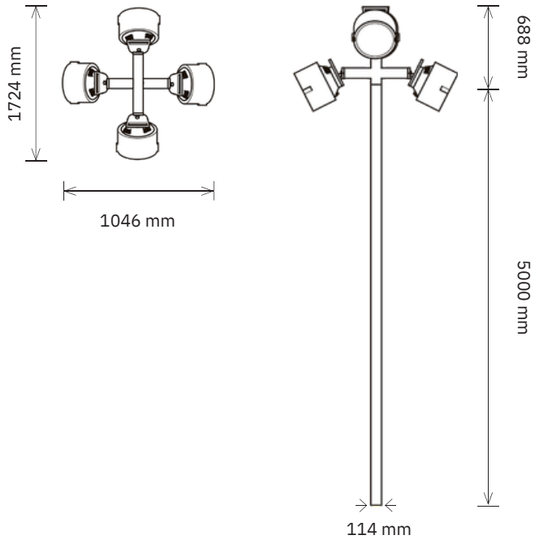

TECHNICAL INFORMATION

Product code	LO-PR-04
Lighting element	LED
Number of lighting elements	4
Maximum luminous flux (lm)	9600
Colour rendering index (CRI)	≥70
Colour temperature (K)	3000
Rated power (W)	90
Supply voltage	100...240VAC
Supply frequency (Hz)	50...60
Working temperature (Ta)	-30...+50°C
Moisture and dust resistance (IP)	66
Vandal resistance (IK)	08

MATERIAL

Lighting head	Stainless Steel
Lighting pole	Stainless Steel

COLOURS

Finish of metal parts	Brushed

* Please contact for alternative finishes and materials!

CE



GINKO



DESCRIPTION

Ginko is a sculptural urban light inspired by the distinctive fan-shaped leaves of the Ginkgo Biloba, also known as the Maidenhair tree.


Its gracefully curved steel pole—standing over 5 meters high—evokes the natural movement of the tree, while the leaf-shaped head functions as a reflector, directing light from a hidden source within the pole. The underside of the leaf is finished in white to enhance reflection and provide soft, efficient illumination for public spaces.

Both the pole and reflector are manufactured from galvanized and powder-coated steel in RAL 9005 (jet black), ensuring durability and a strong visual presence. The LED driver is housed inside the pole for easy access and clean integration.

DESIGNER

Margus Triibmann

DIMENSIONS

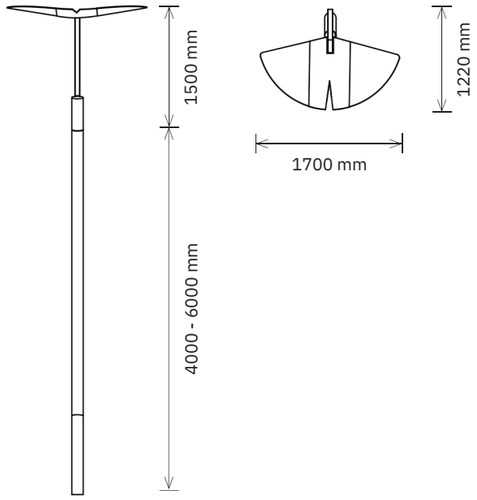

TECHNICAL INFORMATION

Product code	LO-GI-01
Light source	LED
Number of lighting elements	1
Max light output (lm)	3033
Color rendering index (CRI)	≥90
Color temperature (K)	3000/4000
Power consumption (W)	25
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	65
IK rating	8

MATERIAL

Leaf	Galvanized and powderpainted steel
Curved Pole	Galvanized and powderpainted steel

COLORS

Leaf	White (RAL 9003) and Graphite Black (RAL 9011)
Curved Pole	Graphite black (RAL 9011)

CE







OAK TREE



DESCRIPTION

Oak Tree is an urban lighting fixture inspired by the distinctive leaf shape of the Ginkgo Biloba and the symbolic tradition of planting trees in memory of loved ones, as practiced in Judaism. Originally designed for the Old Jewish Cemetery, the fixture references remembrance through both form and function.


The leaf-shaped reflectors are positioned around a hidden light source integrated into the pole. Each luminaire contains two light sources, and detailed technical specifications are available on the next page.

The curved pole stands approximately 5 meters high and is manufactured from galvanized and powder-coated steel. The finish is Oxide 2, mimicking the look of CORTEN steel, while the underside of each reflective leaf is painted in RAL 9003 to enhance light output.

DESIGNER

Triinu Triibmann & Diederik Kales

DIMENSIONS

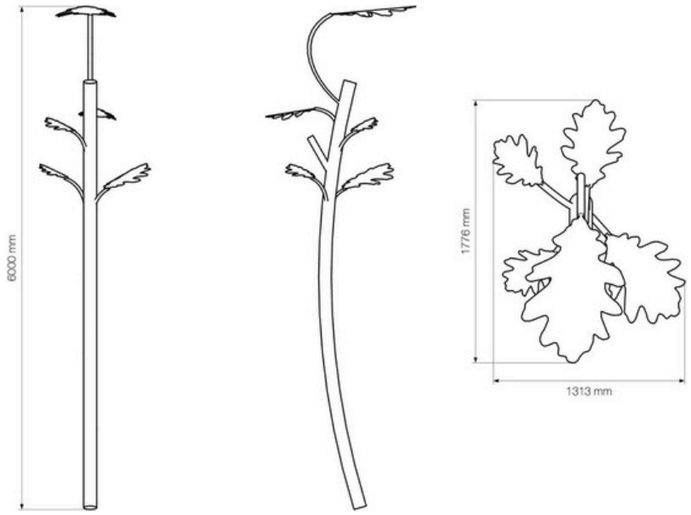

TECHNICAL INFORMATION

Product code	LO-OA-01-100
Light source	LED
Number of lighting elements	2
Max light output (lm)	4596
Color rendering index (CRI)	≥80
Color temperature (K)	3000
Power consumption (W)	58
Supply voltage	100...240VAC
Supply frequency	50...60Hz
Working temperature Ta	-30 . . . +40°C
IP rating	66
IK rating	8

MATERIAL

Leaf	Galvanized and powderpainted steel
Curved Pole	Galvanized and powderpainted steel

COLORS

Leaf	White (RAL 9003) and Corten imitation Oxide 2
Curved Pole	Corten imitation Oxide 2

CE







INSULATOR



DESCRIPTION

Insulator is a wall-mounted luminaire designed for outdoor façades and indoor spaces. Its adaptable form also allows it to function as street or park lighting when installed on a pole.


The design takes cues from the insulator—a familiar object found in electrical infrastructure and power stations. This industrial inspiration is reinterpreted into a sculptural light fixture that bridges utility and aesthetics.

Insulator comes with two wall mounting options: in one version, the lamp appears to rest atop the bracket; in the other, it hangs beneath it. This dual approach offers subtle visual variation, allowing the fixture to either stand confidently or float with quiet presence—tailored to the architecture it complements.

DESIGNER

Margus Triibmann

DIMENSIONS

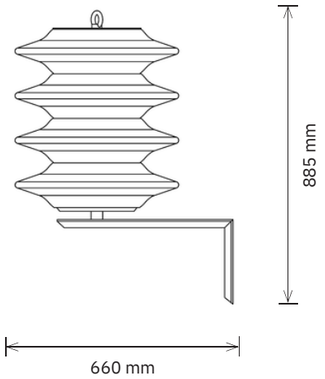

TECHNICAL INFORMATION

Product code	LO-IN-01
Light source	LED
Number of lighting elements	1
Max light output (lm)	2375
Color temperature (K)	3000
Power consumption (W)	45
Supply voltage (V)	24
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	08
Weight (kg)	6

MATERIAL

Insulator Body	Rotomolded polyethylene
Metal Construction	Galvanized and powder painted steel

COLORS


Insulator Bodu	☐ White
Luminaire head	■ Graphite black (RAL 9011)

CE





DIMENSIONS



TECHNICAL INFORMATION

Product code	LO-IN-02
Light source	LED
Number of lighting elements	1
Max light output (lm)	2375
Color temperature (K)	3000
Power consumption (W)	45
Supply voltage (V)	24
Working temperature Ta	-30 . . . +40°C
IP rating	67
IK rating	08
Weight (kg)	6

MATERIAL

Insulator Body	Rotomolded polyethylene
Metal Construction	Galvanized and powder painted steel

InCsOuLlaOtoRr SBodu	White
Luminaire head	Graphite black (RAL 9011)



CE



INSULATOR



KIRJELDUS

Volta kvartali keskväljaku valgusinstallatsiooni kujunduskontseptsiooni väljatöötamisel on lähtutud käsitletava kvartali unikaalsusest. Volta kvartali ajalooliste tehaste funktsioonist ning elementidest inspiratsiooni ammutades on disainitud valgustitele ja väikevormidele antud lisaväärtus läbi materjalikasutuse ja kaasaegseid tehnoloogilisi lahendusvõimalusi arvestades.


Valgustite disainis on lähtutud elektrialajaamas ühest levinumast vormist - isolaatorist. Insulator valgusti vormid on valmistatud rotovalutehnoloogias kergesti hooldatavast, ilmastikutingimustele vastupidavast ja valgust läbikumavast valget värvi PE materjalist. Insulator valgustid on paigutatud kahe kaupa 6-meetrisele pulbervärvitud silindrikujulisele mastile.

Valgusmastid on omavahel seotud valguskettidega, mis imiteerivad elektriliine. Valgusketid on ilmastikukindlaid musta värvi ja painduvast silikageelist valmistatud LED valgustid. Tänu musta värvi viimistlusele jääb päevasel ajal vaatlejale mulje, et tegemist on tavapäraste elektrikaablitega. Pimedal ajal aga süttivad elektrikaablid ja seovad Insulator valgustid ühtseks tervikuks. Valgusketid on jupitatud ning omavahel ühenduses metallist liigendite abil.

DISAINER

Keha3 & UN-LIKE

DIMENSIOONID

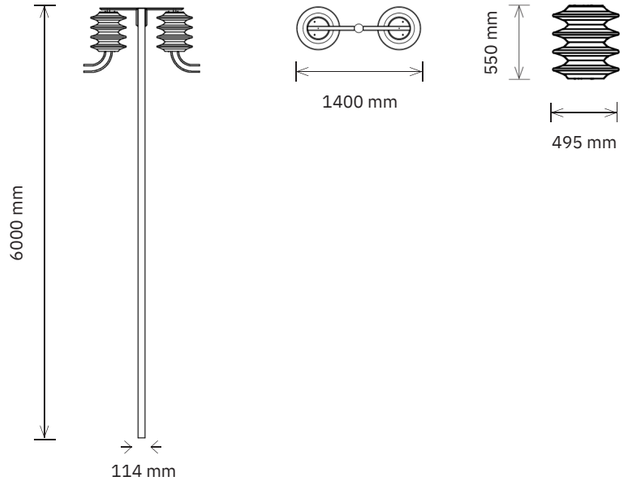

* Allolev tehniline informatsioon kehtib ühe valgusti komplekti kohta! Ühte komplekti kuulub: 1x valgusmast, 2x Insulator valgusti kuppel, 4x ca 5m valguskett ja 2x toiteplokk. Väljakul on kokku 3 valgusti komplekti!


INSULATOR TEHNILINE INFORMATSIOON


Tootekood	LO-IN-02-400
Valgusallikas	LED
Toitepinge (V)	24
Maksimaalne valgusvoog (lm)	4750
Valgustemperatuur (K)	3000
Nimivõimsus (W)	90
Töötemperatuur (Ta)	-30...+50°C
Niiskus- ja tolmukindlus (IP)	67
Vandaalikindlus (IK)	08

VALGUSKETI TEHNILINE INFORMATSIOON

Tootekood	LO-CT-03-001
Valguselement	LED
Toitepinge (V)	24
Maksimaalne valgusvoog (lm)	1480
Valgustemperatuur (K)	RGB
Nimivõimsus (W)	288
Juhtseade	Arditi PWM4 IP65 (Casambi)
Töötemperatuur (Ta)	-25...+50°C
Niiskus- ja tolmukindlus (IP)	65
Vandaalikindlus (IK)	08

CE

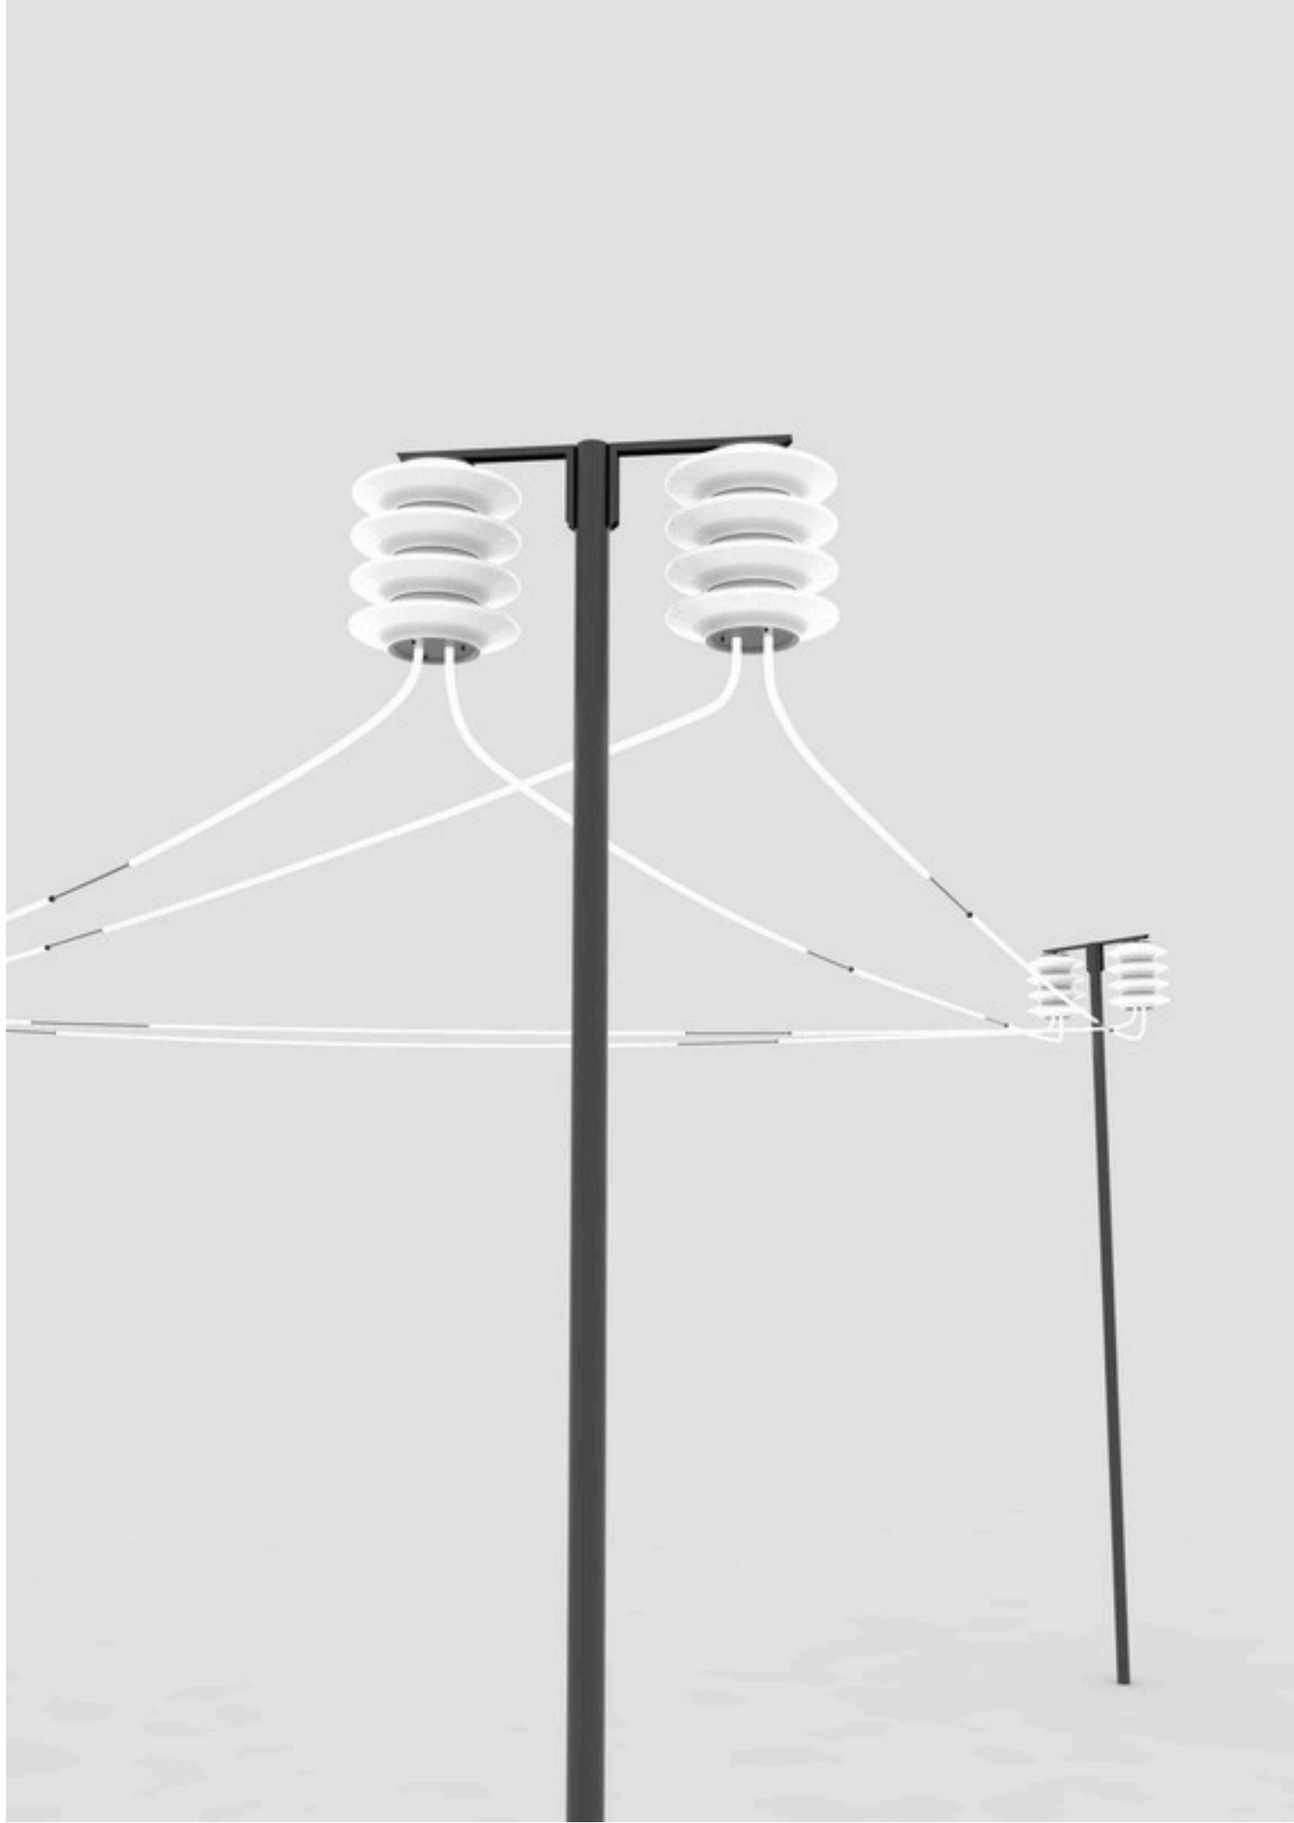

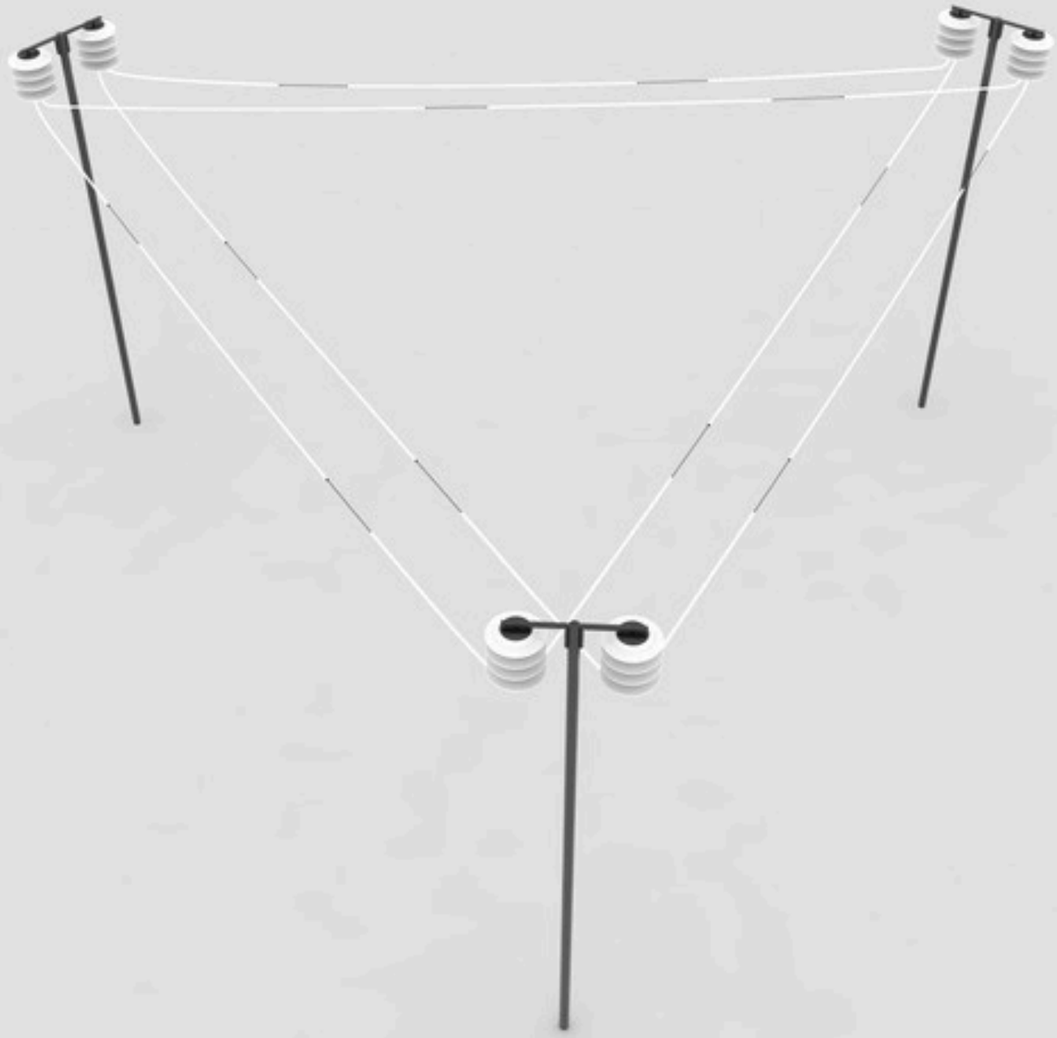

TOITEPLOKI TEHNILINE INFORMATSIOON

Tootekood	MEAN WELL ELG-240-24
Kogus per mast (tk)	2
Toitepinge (AC)	200...305
Sagedus (Hz)	47...63
Sisselülitusvool, A	63A (230VAC)
Võimsustegur	≥ 0.95/230VAC
Niiskus- ja tolmukindlus (IP)	67
Kaitseklass (I,II,III)	I

MATERJAL

Insulator valguskuplid	Polüetüleen (PE)
Valgusketid	Silikageel
Valgusti mast	Roostevaba teras
Insulator valguskuplite kinnitusklamber	Roostevaba teras

VÄRVID

Insulator valguskuplid	Valge / Naturaalne
Valgusketid	Must
Valgusti mast	Pulbervärv (RAL)
Insulator valguskuplite kinnitusklamber	Pulbervärv (RAL)

CE

BUOY



DESCRIPTION

Buoy was designed to be a portable and durable outdoor luminaire, which at the same time would look attractive indoors. Buoy can be hung on the wall, placed in a garden, or fixed to a pole. Its unique and simple shape create a clean and eye-catching design luminaire.


The eye on top of the Buoy acts as a stabilizer when placing it on the ground or can be used to hang the luminaire from the ceiling, a wall or even hang multiple Buoys on a line. That way Buoy can function as a ceiling or wall lamp. The versions with a stand transform Buoy into a floor lamp which can be adjusted to three different heights. It is possible to “dress up” Buoy in a handmade net, giving the luminaire an even more marine look.


The body of Buoy is made from semi-transparant white polyethylene. The caracteristics of this material (PE) make it highly vandal proof as it requires special adhesives to stick to the surface permenantly. For example, graffiti will come off easy. Due to the wall thickness, Buoy can also take a bump and is nearly impossible to break. Buoy comes with a powder painted cork which houses the E27 socket inside the polyethylene body. Due to the unique cork system, the light bulb can easily be accesed. On the outside of the cork Buoy has a stainless steel switch to easily turn the luminaire on and off. Buoy comes with a 3,5 meter cable and a Schuko plug in either orange or black.

DESIGNER

Margus Triibmann

DIMENSIONS





TECHNICAL INFORMATION

Socket	E27
Light control	On/off switch
Cord length	3500 mm
Plug type	Schuko
IP rating	66
IK rating	8
Weight (kg)	3
Gross weight (kg)	4
Packaging dimensions	L440 x W440 x H440 mm

MATERIAL

Body	Polyethylene
Cork	Powder painted steel + stainless steel switch

COLORS

Product code	LO-BU-01-100
Body	Transparent white
Cork	White aluminium (RAL 9006)
Cable + Plug	Orange

Product code	LO-BU-01-200
Body	Transparent white
Cork	White aluminium (RAL 9006)
Cable + Plug	Black


CE







DIMENSIONS

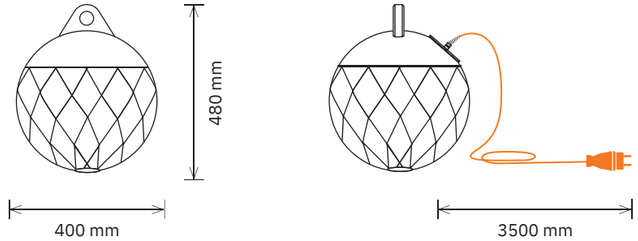

TECHNICAL INFORMATION

Socket	E27
Light control	On/off switch
Cord length	3500 mm
Plug type	Schuko
IP rating	66
IK rating	8
Weight (kg)	3
Gross weight (kg)	4
Packaging dimensions	L440 x W440 x H440 mm

MATERIAL

Body	Polyethylene
Cork	Powder painted steel + stainless steel switch
Net	Shock cord

COLORS


Product code	LO-BU-02-100
Body	Transparent white
Cork	White aluminium (RAL 9006)
Cable + Plug	Orange
Net	Black

Product code	LO-BU-02-200
Body	Transparent white
Cork	White aluminium (RAL 9006)
Cable + Plug	Black
Net	Black

CE


SLAVA

DIMENSIONS

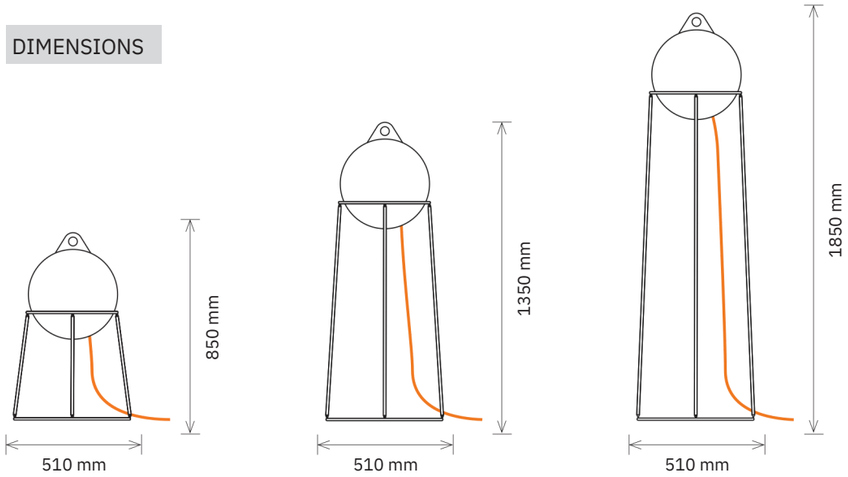

TECHNICAL INFORMATION

Socket	E27
Light control	On/off switch
Cord length	3500 mm
Stand	Adjustable to three heights
Plug type	Schuko
IP rating	66
IK rating	8
Weight (kg)	3
Gross weight (kg)	4
Packaging dimensions	L440 x W440 x H440 mm

MATERIAL


Body	Polyethylene
Cork	Powder painted steel + stainless steel switch
Stand	Powder painted steel

COLORS


Product code	LO-BU-03-100
Body	Transparent white
Cork	White aluminium (RAL 9006)
Stand	Anthracite grey (RAL 7016)
Cable + Plug	Orange

Product code	LO-BU-03-200
Body	Transparent white
Cork	White aluminium (RAL 9006)
Stand	Anthracite grey (RAL 7016)
Cable + Plug	Black

CE

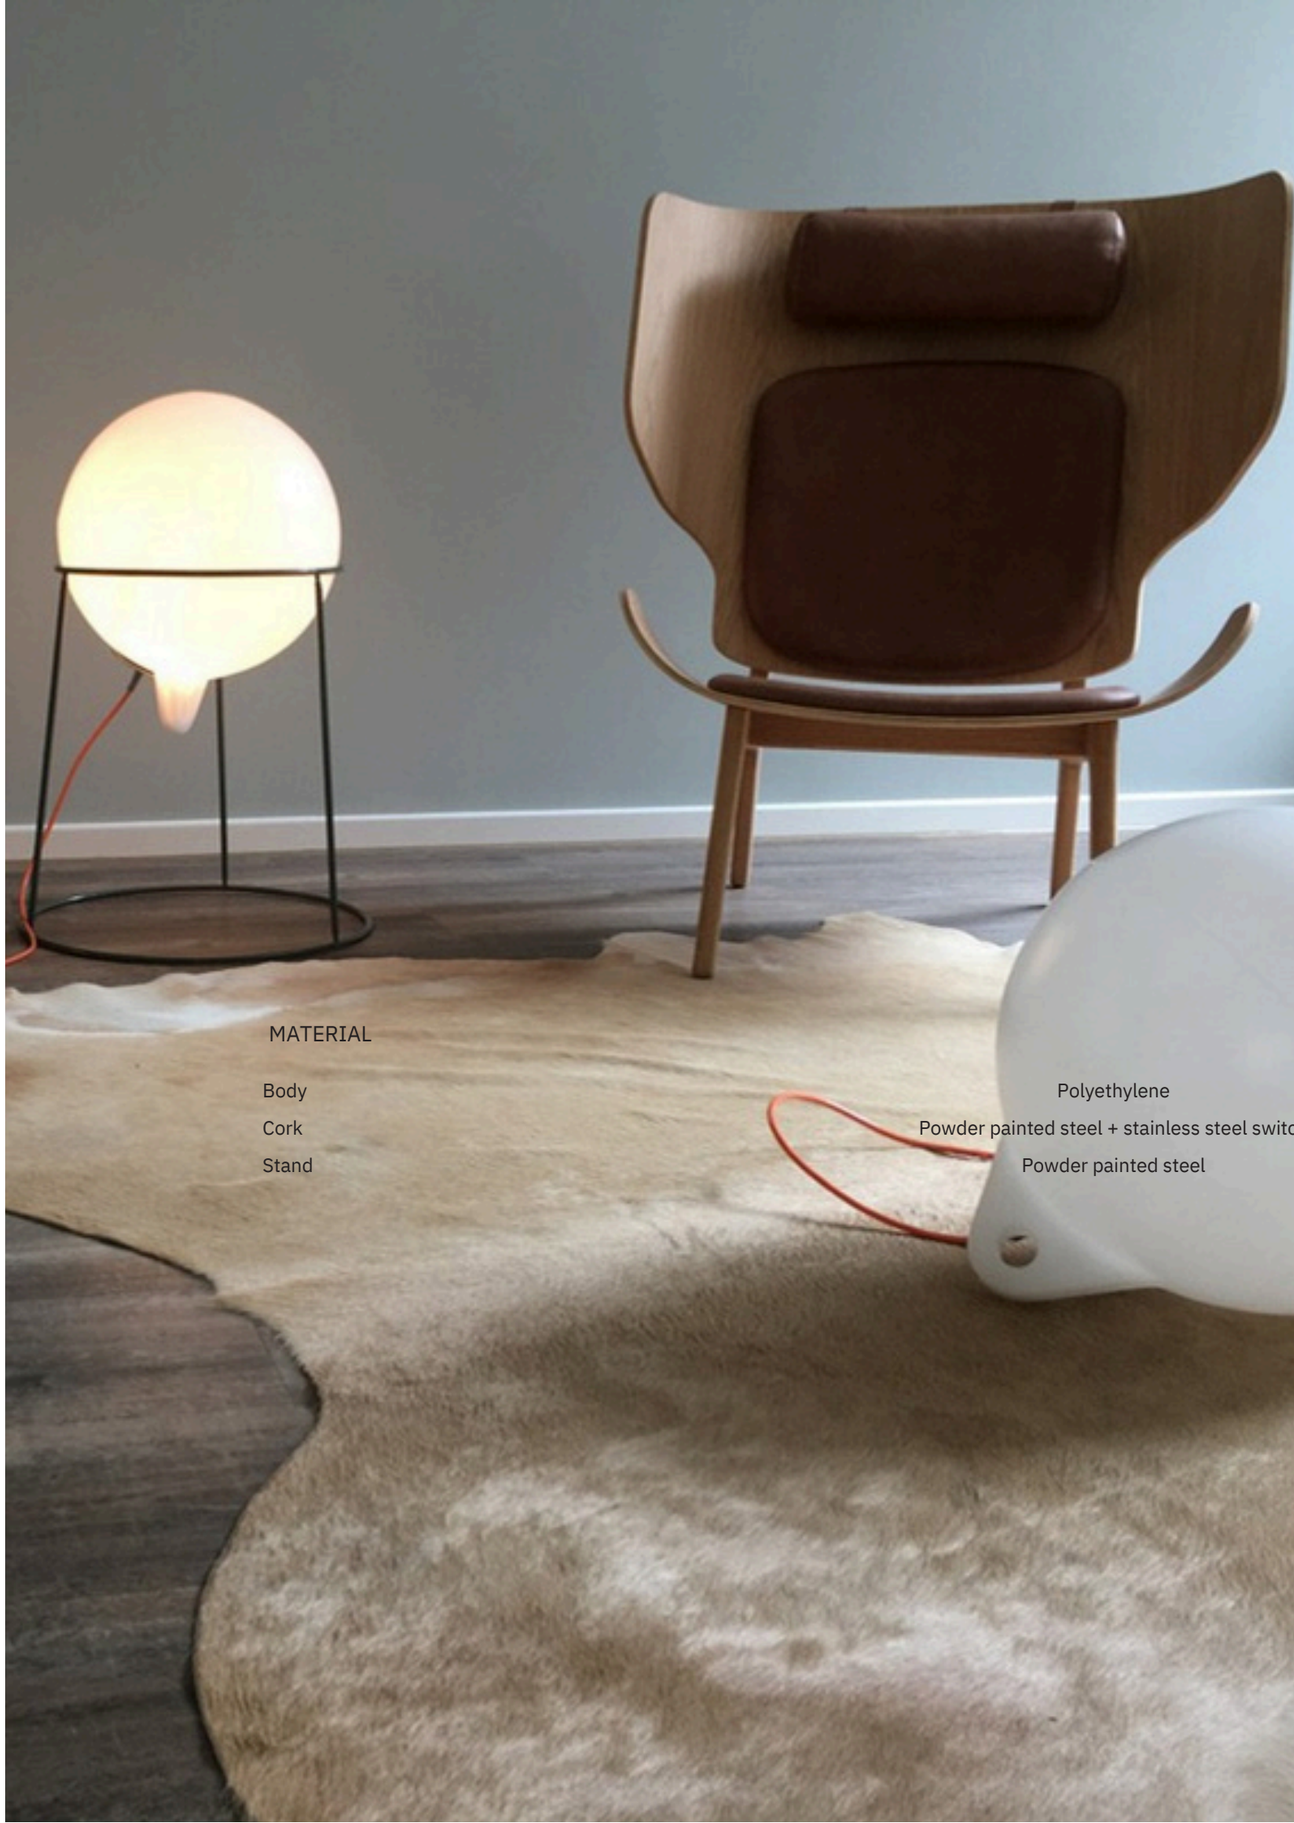

DIMENSIONS

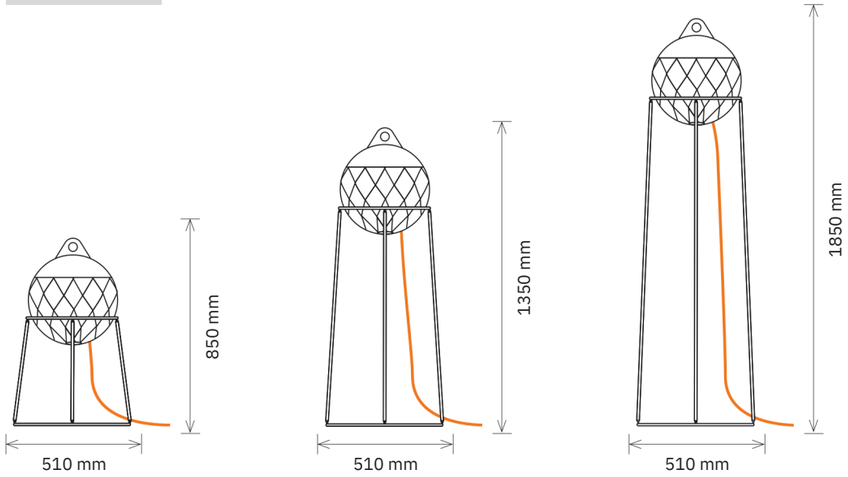

TECHNICAL INFORMATION

Socket	E27
Light control	On/off switch
Cord length	3500 mm
Stand	Adjustable to three heights
Plug type	Schuko
IP rating	66
IK rating	8
Weight (kg)	3
Gross weight (kg)	4
Packaging dimensions	L440 x W440 x H440 mm

MATERIAL

Body	Polyethylene
Cork	Powder painted steel + stainless steel switch
Net	Marine grade sailing rope
Stand	Powder painted steel


CE

COLORS

Product code	LO-BU-04-100
Body	Transparent white
Cork	White aluminium (RAL 9006)
Stand	Anthracite grey (RAL 7016)
Net	Black
Cable + Plug	Orange

Product code	LO-BU-04-200
Body	Transparent white
Cork	White aluminium (RAL 9006)
Stand	Anthracite grey (RAL 7016)
Net	Black
Cable + Plug	Black

BUOY

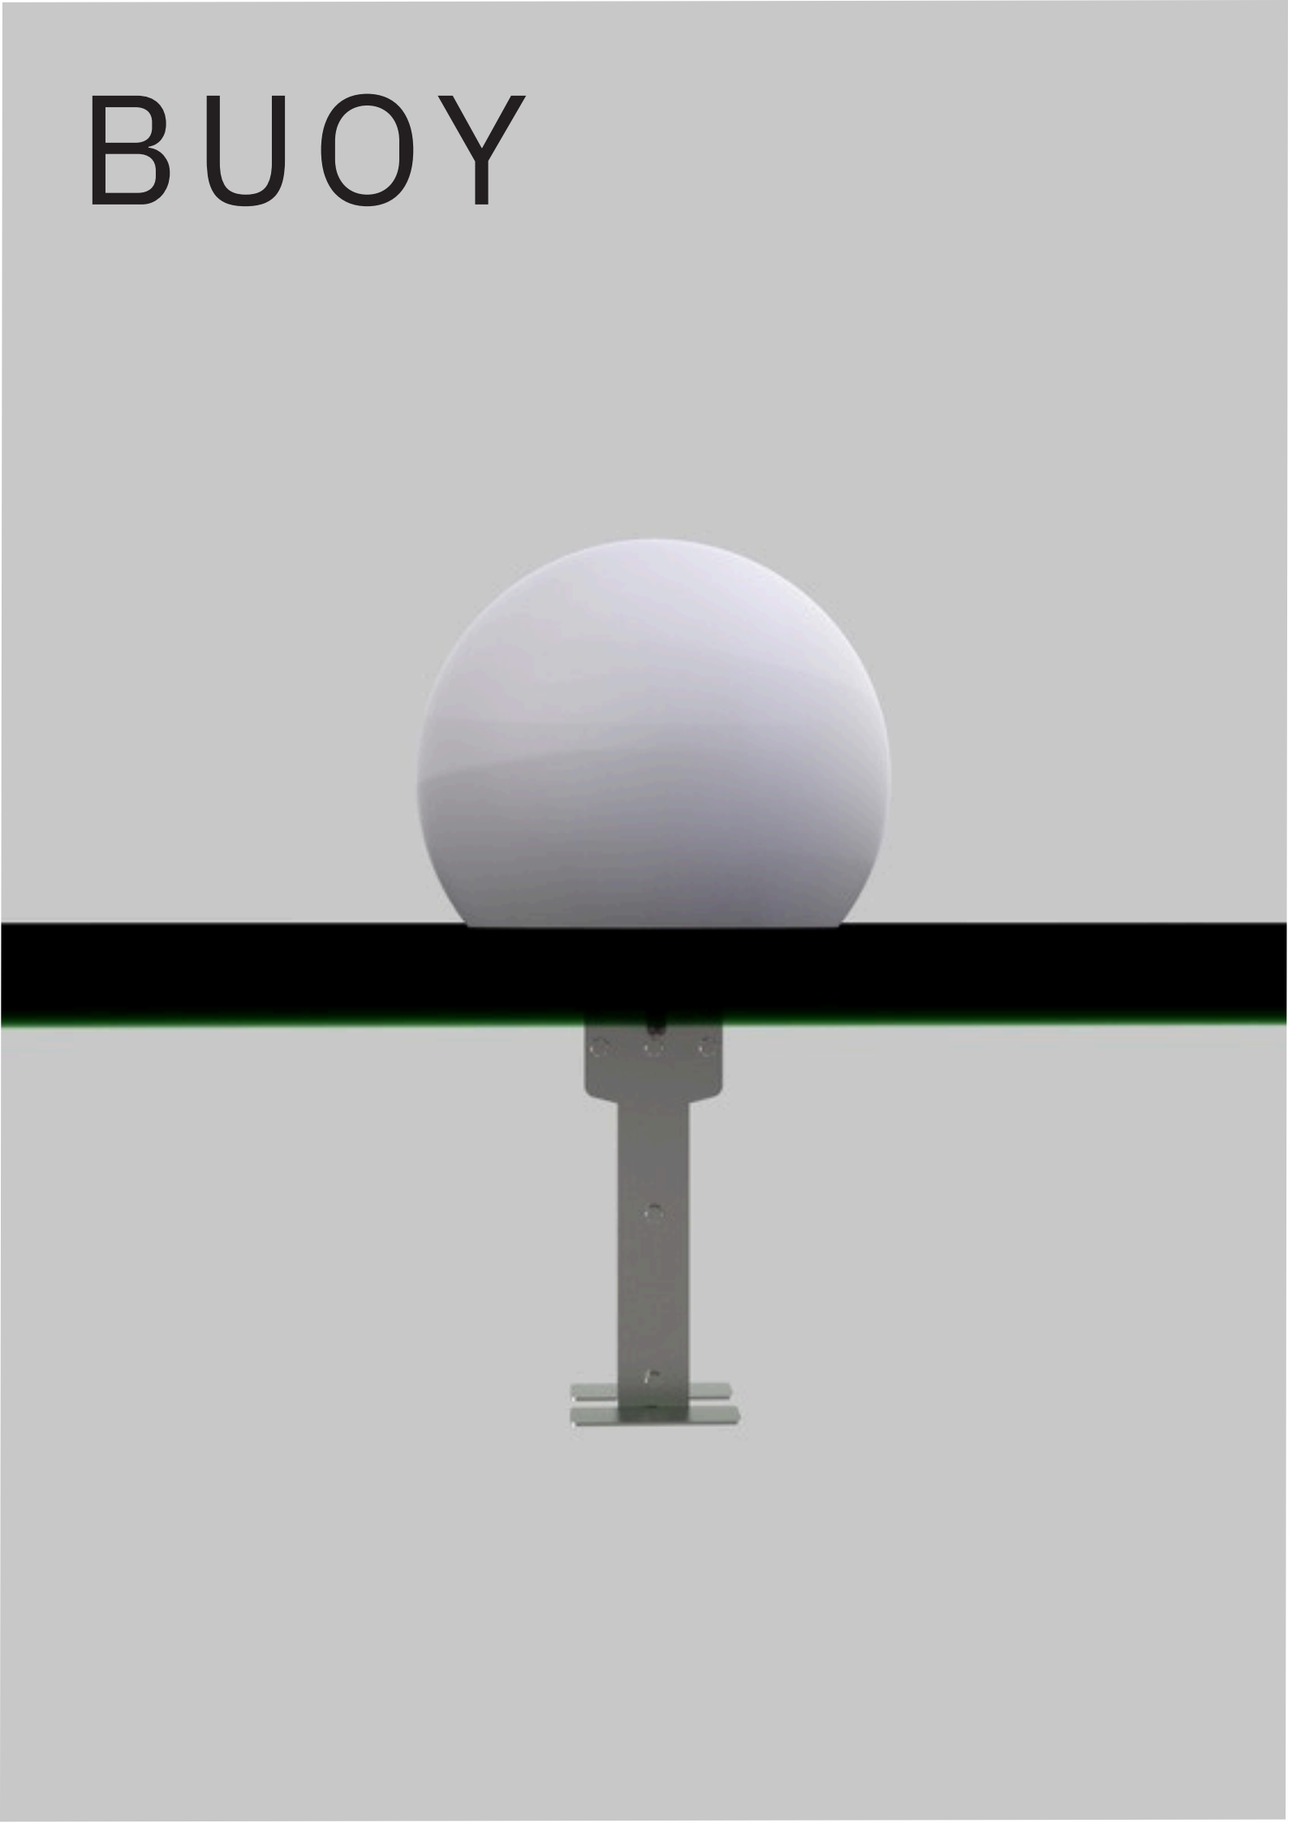

DESCRIPTION


Buoy was designed to be a durable outdoor luminaire, which at the same time would look attractive indoors. In public spaces, Buoy can installed onto the ground witha a special anchor system.

The body of Buoy is made from semi-transparant white polyethylene. The caracteristics of this material (PE) make it highly vandal proof as it requires special adhesives to stick to the surface permenantly. For example, graffiti will come off easy. Due to the wall thickness, Buoy can also take a bump and is nearly impossible to break. Buoy comes with a powder painted cork which houses LED element inside the polyethylene body. Due to the unique cork system, the light bulb can easily be accesed.

DESIGNER

Margus Triibmann

DIMENSIONS

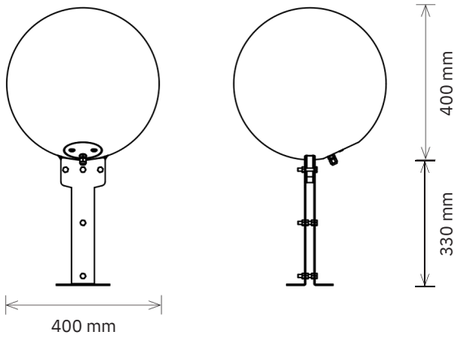

TECHNICAL INFORMATION

Product code	LO-BU-05
Light source	ColorsLED (NNR25-9XX)
Number of lighting elements	1
Max light output (lm)	125
Driver	External (MEANWELL ELG-15)
Color temperature (K)	3000
Power consumption (W)	4
Supply voltage	48 DC
Supply frequency (Hz)	0 DC
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	8
Weight	4

MATERIAL

Body	Polyethylene (PE)
Cork	Powder painted aluminium
Anchor	Galvanized steel

CE



TIMPAN



DESCRIPTION

Timpan is a modular bench-luminaire inspired by the timpani percussion instrument. It can be installed individually or grouped in sets of up to three, creating sculptural seating elements that emit a soft, ambient glow. Ideal for parks, waterfronts, plazas, and other public gathering spaces.

The body is made from semi-transparent white polyethylene—durable, impact-resistant, and highly vandal-resistant. The surface repels adhesives and is easy to clean, making it well-suited for urban environments.


The seat is finished in synthetic teak over waterproof plywood, offering the warm appearance of timber with the performance of marine-grade materials.

Each pod contains LED elements accessible by removing the seat for easy maintenance. Power is supplied through the base, and each pod is anchored with three bolts for secure installation.

DESIGNER

Margus Triibmann

DIMENSIONS

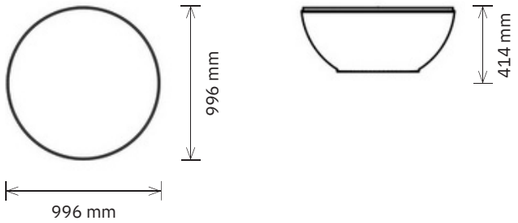

TECHNICAL INFORMATION

Product code	FO-TI-01-200
Light source	LED
Number of lighting elements	1
Max light output (lm)	500
Driver	External (MEAN WELL ELG-15-24)
Color temperature (K)	2700/3000/4000
Power consumption (W)	15
Supply voltage (V)	24DC
Supply frequency (Hz)	0
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	08
Weight	75
Control	DALI / CASAMBI

MATERIAL

Body	Polyethylene
Seat	Synthetic teak

COLORS

Product code	FO-TI-01-200
Body	Semi-transparent white
Seat	Permateek Traditional Elite with Black Caulking


CE







DIMENSIONS

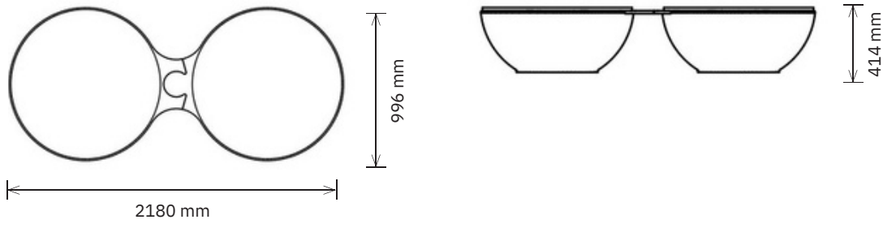

TECHNICAL INFORMATION

Product code	FO-TI-02-200
Light source	LED
Number of lighting elements	2
Max light output (lm)	1000
Driver	External (MEAN WELL ELG-15-24)
Color temperature (K)	2700/3000/4000
Power consumption (W)	29
Supply voltage (V)	24DC
Supply frequency (Hz)	0
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	08
Weight	75
Control	DALI / CASAMBI

MATERIAL

Body	Polyethylene
Seat	Synthetic teak


COLORS

Product code	FO-TI-02-200
Body	Semi-transparent white
Seat	Permateek Traditional Elite with Black Caulking

CE



DIMENSIONS

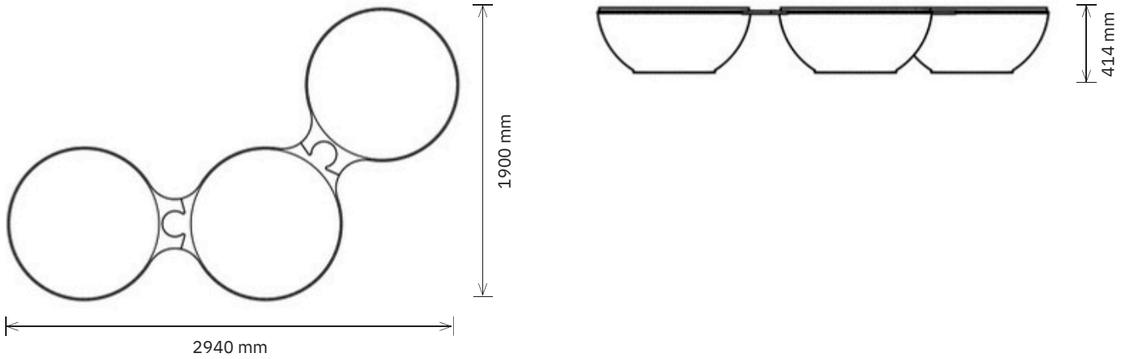

TECHNICAL INFORMATION

Product code	FO-TI-03-200
Light source	LED
Number of lighting elements	3
Max light output (lm)	1500
Driver	External (MEAN WELL ELG-15-24)
Color temperature (K)	2700/3000/4000
Power consumption (W)	45
Supply voltage (V)	24DC
Supply frequency (Hz)	0
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	08
Weight	75
Control	DALI / CASAMBI

MATERIAL

Body	Polyethylene
Seat	Synthetic teak

COLORS


Product code	FO-TI-03-200
Body	Semi-transparent white
Seat	Permateek Traditional Elite with Black Caulking

CE





ROTOR

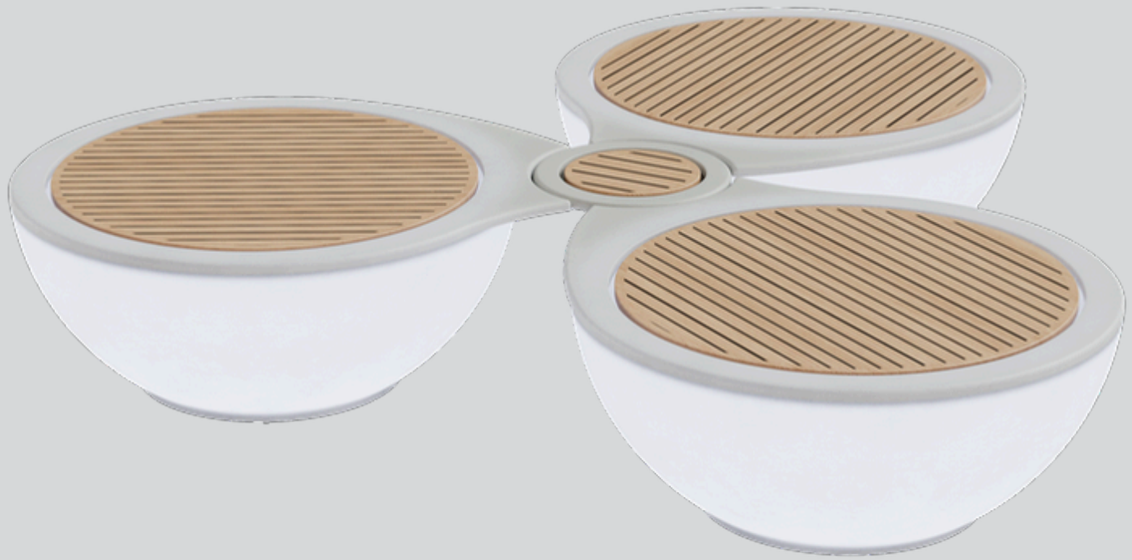

DESCRIPTION

Rotor is an illuminated design bench inspired by the propulsion propellers of large ships. Its sculptural, radial form is most evident when viewed from above, making it a striking and memorable feature in maritime environments, public plazas, or recreational landscapes.

The bench consists of multiple curved pods that offer both seating and ambient lighting. Its body is made from semi-transparent white polyethylene, a durable and impact-resistant material that diffuses light while withstanding heavy use. The surface is vandal-resistant, as adhesives and graffiti are easily removed.


Seating surfaces are finished with synthetic teak over waterproof plywood, referencing traditional ship decking. This marine-grade material is highly resistant to moisture, UV, and wear—making it ideal for long-term public use.

Each pod houses IP66 LED, accessible by unscrewing the synthetic teak panel for quick maintenance. Power is supplied through the base of one pod, and each module is anchored with three bolt connections for a secure and stable installation.

DESIGNER

Margus Triibmann

DIMENSIONS

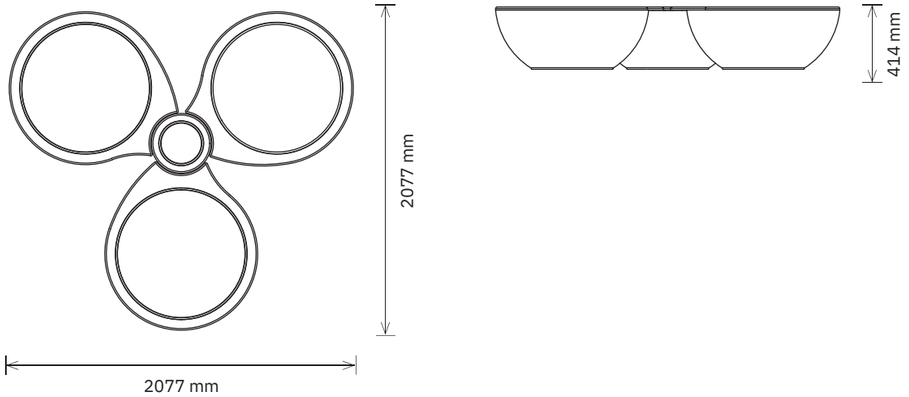

TECHNICAL INFORMATION

Product code	FO-RO-01-200
Light source	LED
Number of lighting elements	3
Max light output (lm)	1500
Driver	External (MEAN WELL ELG-60-24)
Color temperature (K)	2700/3000/4000
Power consumption (W)	60
Supply voltage (V)	24DC
Supply frequency (Hz)	0
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	08
Weight	75

MATERIAL

Body	Polyethylene
Seat	Synthetic teak

COLORS

Body	Semi-transparent white
Seat	Permateek traditional elite with black caulking


CE




LUUNJA SADAM



INSULATOR

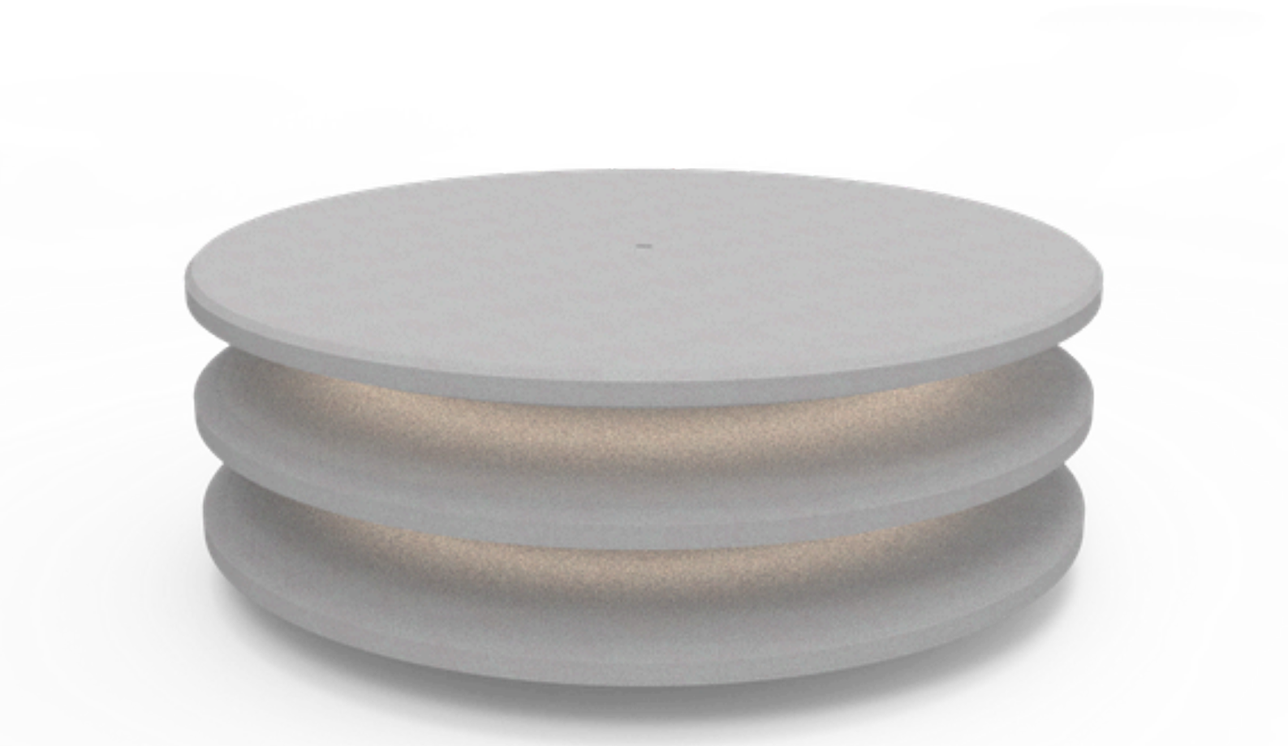

DESCRIPTION

Insulator Bench is an illuminated seating element inspired by the distinctive form of industrial ceramic insulators. Designed as both functional street furniture and a sculptural lighting feature, it brings subtle, ambient illumination to pedestrian paths, plazas, or other shared public spaces.


The bench is made from monolithic cast concrete, with integrated LED light elements recessed into the form. The lighting is softly diffused downward, enhancing safety and atmosphere without visual glare. By day, the bench serves as a bold architectural volume; by night, it becomes a low-glow light sculpture that activates its surroundings.

Durable, weatherproof, and visually striking, Insulator Bench is ideal for urban environments, parks, or high-traffic public areas seeking a blend of function and identity.

DESIGNER

Keha3 & UN-LIKE

DIMENSIONS

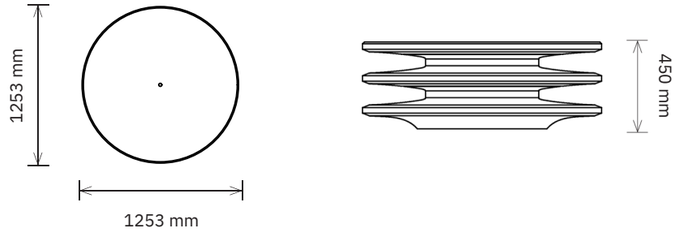

TECHNICAL INFORMATION

Product code	FO-IN-01-100
IP rating	67
IK rating	10
Weight	500

MATERIAL

Bench construction	Smooth Concrete


COLOURS

Concrete finish		Smooth, uniform form-finished surface



CE

DIMENSIONS

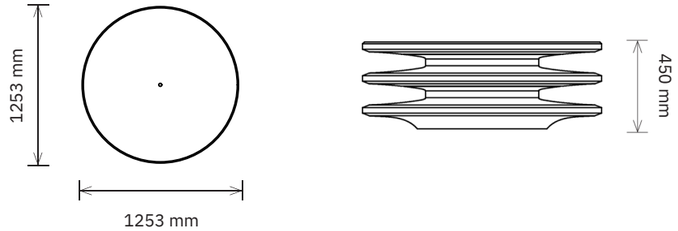

TECHNICAL INFORMATION

Product code	FO-IN-01-200
Light source	LED
Number of lighting elements	2
Max light output (lm)	2250
Driver	External (MEAN WELL ELG-240-24)
Color temperature (K)	2700/3000
Power consumption (W)	55
Supply voltage (V)	24DC
Working temperature Ta	-25. . . +55℃
IP rating	67
IK rating	10
Weight	500
Control	DALI / CASAMBI

MATERIAL


Bench construction	Smooth Concrete

COLOURS

Concrete finish	Smooth, uniform form-finished surface

CE



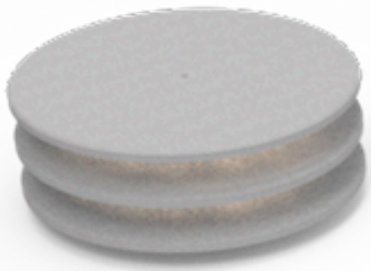





CRANBERRY



DESCRIPTION

Cranberry is a compact chair luminaire with a soft, sculptural form inspired by its namesake berry. Designed for both indoor and outdoor environments, it adds a playful and luminous presence to public spaces. The lighted versions in translucent colors bring a sense of warmth, color, and atmosphere, making it ideal for parks, courtyards, and plazas.

The body is made from rotomolded polyethylene, offering high durability and vandal resistance. Its smooth surface resists adhesives and graffiti, making it easy to maintain. In lighter colors, the body allows internal light to glow through. Darker versions are non-translucent and are available without lighting.


The illuminated version features a powder-coated steel cork housing a LED element, with the option of plug-and-cable or hardwired foundation connection. The bulb can be accessed easily through the cork. For secure installation, Cranberry can be anchored with three bolts, or ballasted with gravel or sand when used without lighting or drainage.

A 360-degree rotating version is also available, offering added interaction and flexibility for social spaces.

DESIGNER

Margus Triibmann

DIMENSIONS

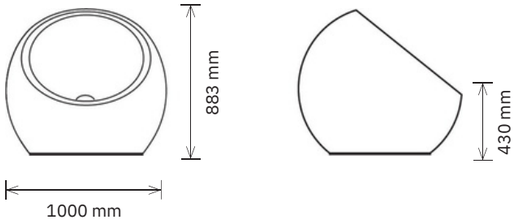

TECHNICAL INFORMATION

Product code	FO-CR-01-100
Light	No
Drainage	No
Weight (kg)	22

TECHNICAL INFORMATION

Product code	FO-CR-02-100
Light	No
Drainage	Yes
Weight (kg)	22

MATERIAL

Body	Polyethylene
Cork	Powder painted steel

COLOR OPTIONS


Body + Cork	White
	Orange
	Red
	Grey
	Black

CE






DIMENSIONS

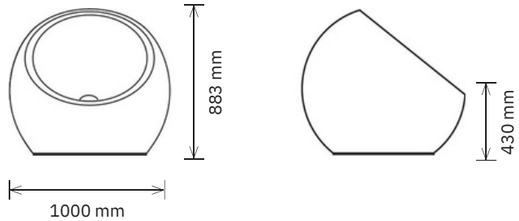

CONNECTION



TECHNICAL INFORMATION

Product code	FO-CR-03-200
Light	Yes
Drainage	No
Socket	E27
Cable + Plug	Yes
IP rating	65
IK rating	08
Weight (kg)	23

TECHNICAL INFORMATION

Product code	FO-CR-04-200
Light	Yes
Drainage	Yes
Socket	E27
Cable + Plug	Yes
IP rating	65
IK rating	08
Weight (kg)	23

MATERIAL


Body	Polyethylene
Cork	Powder painted steel

COLOR OPTIONS


Body + Cork	White
	Orange
	Red
Cable + Plug	Orange
	Black

CE

DIMENSIONS

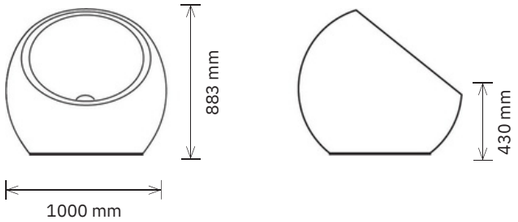

CONNECTION



TECHNICAL INFORMATION

Product code	FO-CR-05-200
Light source	LED
Drainage	No
Number of lighting elements	1
Max light output (lm)	500
Driver	External (MEAN WELL ELG-15-24)
Color temperature (K)	2700/3000/4000
Power consumption (W)	15
Supply voltage (V)	24DC
Supply frequency (Hz)	0
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	08
Weight	75
Control	DALI / CASAMBI

MATERIAL

Body	Polyethylene
Cork	Powder painted steel


COLOR OPTIONS

Body + Cork	White
	Orange
	Red


CE



DIMENSIONS

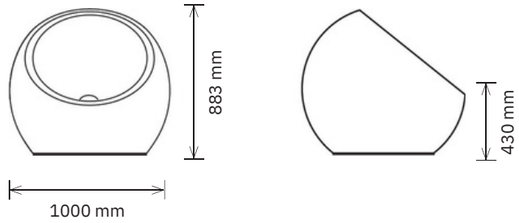

CONNECTION



TECHNICAL INFORMATION

Product code	FO-CR-06-200
Light source	LED
Drainage	Yes
Number of lighting elements	1
Max light output (lm)	500
Driver	External (MEAN WELL ELG-15-24)
Color temperature (K)	2700/3000/4000
Power consumption (W)	15
Supply voltage (V)	24DC
Supply frequency (Hz)	0
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	08
Weight	75
Control	DALI / CASAMBI

MATERIAL


Body	Polyethylene
Cork	Powder painted steel

COLOR OPTIONS


Body + Cork	White
	Orange
	Red

CE

DIMENSIONS

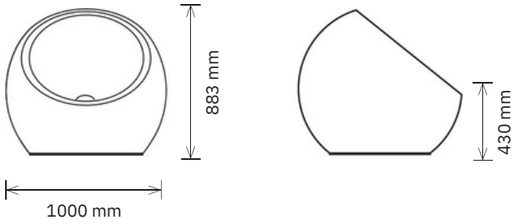

CONNECTION



TECHNICAL INFORMATION

Product code	FO-CR-07-200
Light source	LED
Drainage	No
Rotation	360 degrees
Number of lighting elements	1
Max light output (lm)	500
Driver	External (MEAN WELL ELG-15-24)
Color temperature (K)	2700/3000/4000
Power consumption (W)	15
Supply voltage (V)	24DC
Supply frequency (Hz)	0
Working temperature Ta	-25. . . +55°C
IP rating	66
IK rating	08
Weight	75
Control	DALI / CASAMBI

MATERIAL

Body	Polyethylene
Cork	Powder painted steel

COLOR OPTIONS

Body + Cork	White
	Orange
	Red

CE





LUTSUKIVI



KIRJELDUS


Inspiratsioon Lutsukivi-nimelisele tool-valgustile sai ammendatud looduses esinevast siledapinnalisest lutsukivist. Lutsukivi on lõbus linnamööbli element, mis mõeldud ilmestamaks keskkonda nii päevasel kui öisel ajal. Tänu oma rotovalutehnoloogias toodetud vastupidavale ja valgust läbilaskvale PE korpusele, süttivad pimeduses Lutsukivi näol justkui märgutuled. Istumisalasid on võimalik valmistada mistahes tooni ja just heledate toolide puhul on kogu korpuse valgustamine üheks atraktiivsuse allikaks, muutes hämardumisel ruumi helendavate skulptuuride põnevaks mänguks. Sealjuures öist jalutajat sedaviisi suunates ja abistades.

Polüetüleen on ilmastiku ja UV-kindel, mistõttu see ei korrodeeru ning ei muutu päikese ega külma käes hapraks. Samuti ei reageeri polüetüleen enamuste kemikaalidega, mistõttu võib toodete puhastamisel kasutada erinevaid puhastusaineid. Lutsukivi tooli sisse on lisatugevuseks paigaldatud vastupidav ja läbipaistev vaakumvormitud PC tugi. Valguselemendiks on IP65 LED valgusallikas (RGBW) ja valgusti juhtimiseks on saadaval nii DALI kui CASAMBI lahendus.

DISAINER

Triinu Triibmann & Diederik Kales

DIMENSIOONID

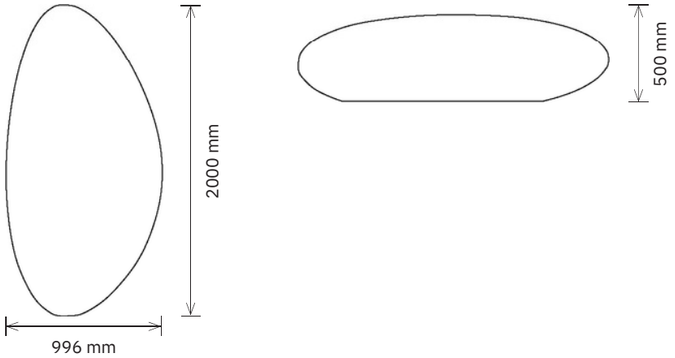


TEHNILINE INFORMATSIOON

Tootekood	FO-PE-02
Valguselement	LED RGBW
Värviesituse üldindex (CRI)	80 (valge valgus)
Värvitemperatuur (K)	2700 (valge valgus)
Nimivõimsus (W)	48
Toitepinge	220...240VAC
Töötemperatuur (Ta)	-25...+50°C
Niiskus- ja tolmukindlus (IP)	65
Vandaalikindlus (IK)	8

MATERJAL

Korpus	Polüetüleen (PE)
Toestus	Polükarbonaat (PC)


CE

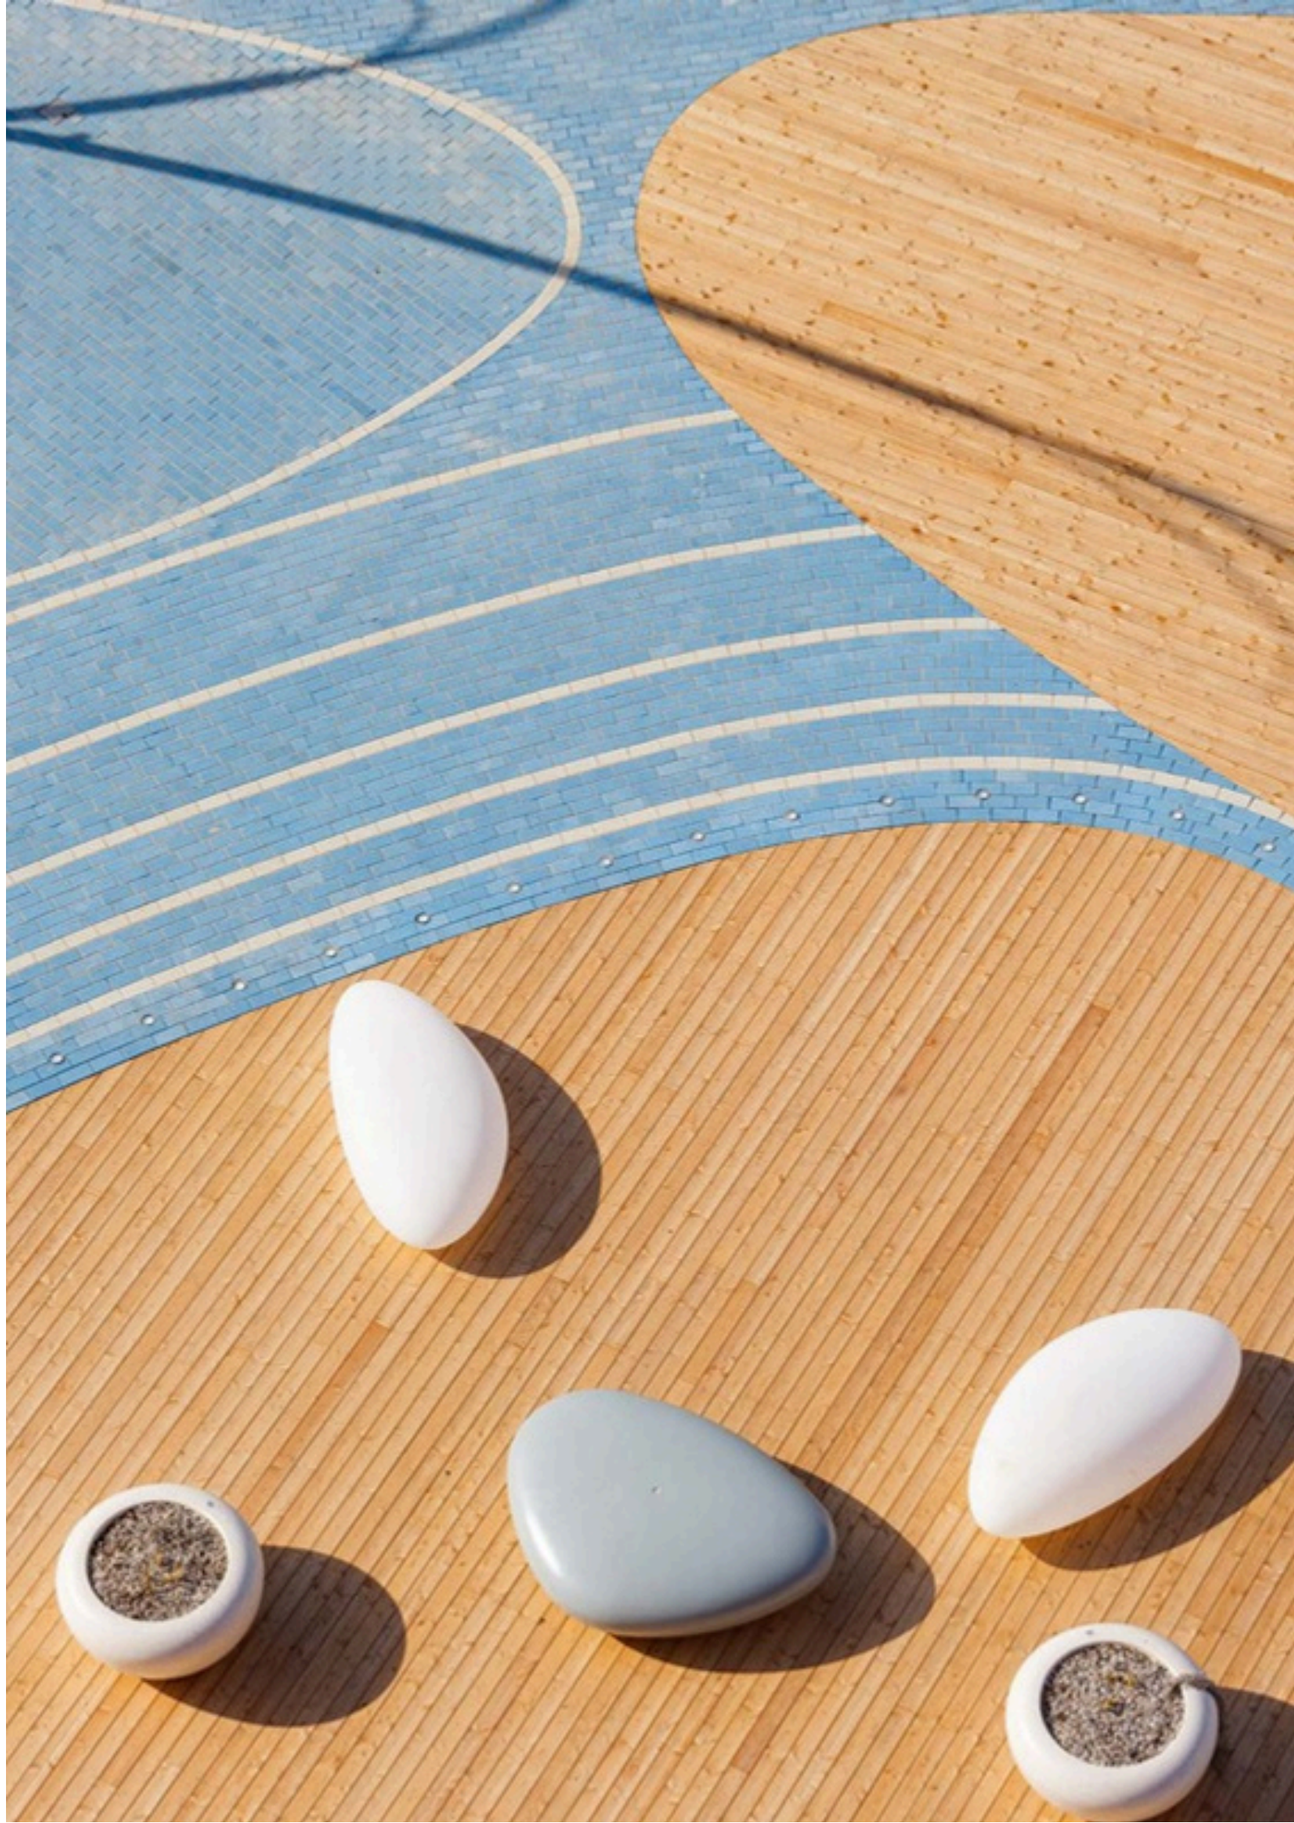





TANK

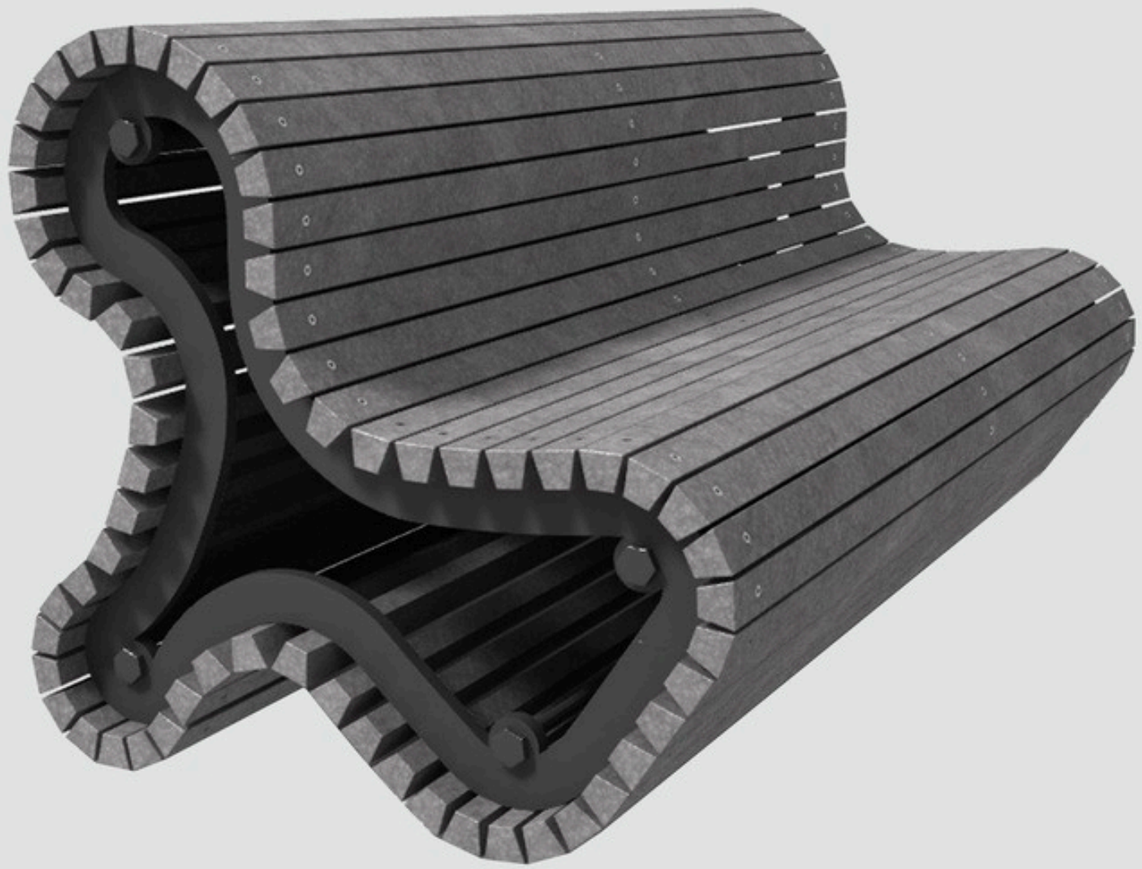

DESCRIPTION

Tank is a versatile, modular bench designed for dynamic use in public space. Its three-position form allows the bench to be rotated into different configurations—each unlocking a new way to sit, lean, or lounge.

In its upright orientation, Tank resembles a classic park bench or indoor sofa. When turned, it offers more informal or sculptural seating options, making it suitable for a wide range of urban and recreational settings.


The supporting structure consists of polyethylene side plates joined by galvanized steel connectors. The seating surface is available in either recycled plastic planks or a combination of recycled plastic and oiled larch wood. In the hybrid version, plastic is strategically placed in ground-contact areas for maximum durability.

Built to withstand harsh conditions, Tank is fully weather- and vandal-resistant, combining functional performance with bold form.

DESIGNER

Margus Triibmann

DIMENSIONS

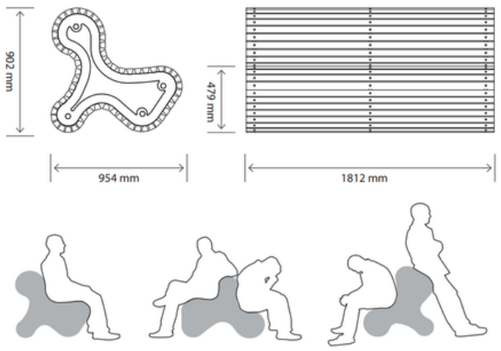

TECHNICAL INFORMATION

Product code	FO-KL-01
Material	Recycled plastik, PE, galvanized powder painted metal
Wood	No
Weight (kg)	120

Product code	FO-KL-02
Material	Recyled plastic, PE, galvaized powder painted metal
Wood	Thermo treated wood
Weight (kg)	140


CE







HORSESHOE

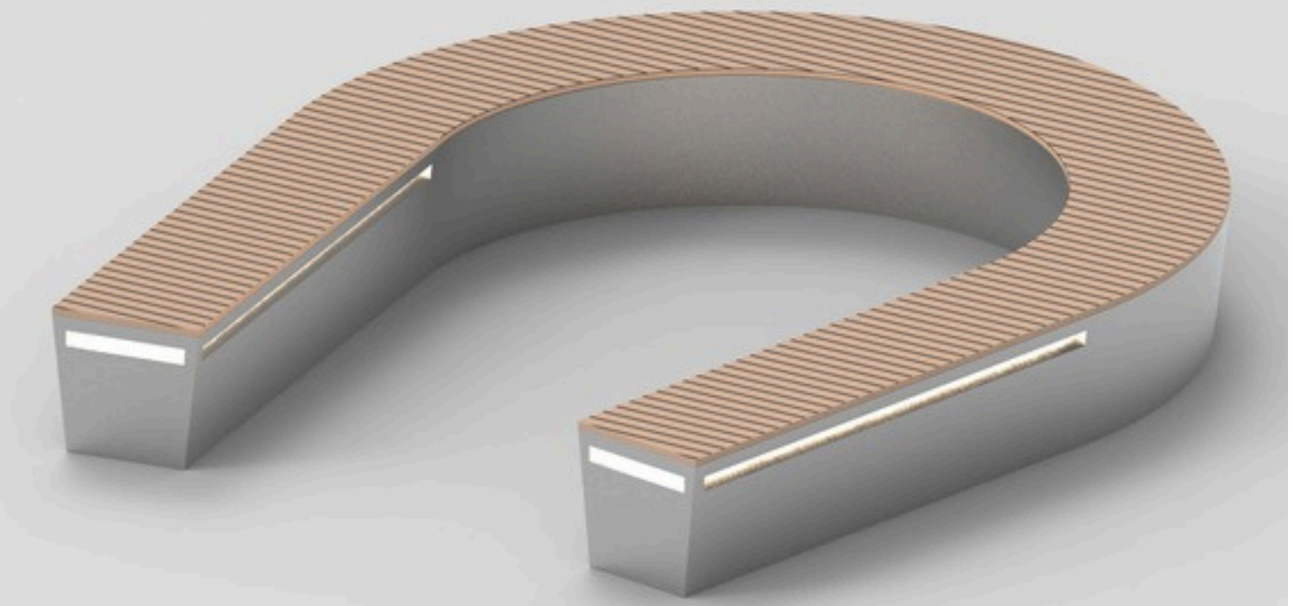

DESCRIPTION

The inspiration for the curved horseshoe-shaped seat-light comes from the form of a horseshoe. The seating hints through architectural layout and the symbolism of small forms to a galloping and trotting track opened in 1923 on the north side of Tallinn.

The seat-lights planned for the hippodrome carry the message that the seating base, as a park bench concept, is versatile. The purpose of the horseshoe is to be durable, playful, and innovative, supporting, creating, and confirming local identity. The horseshoe-named park benches will carry emotions across generations and build a bridge of memories between different generations, hinting at the long and successful history of the Tallinn Hippodrome.

The main elements of the industrially elegant seat-lights are a curved trapezoidal frame made of stainless steel and a seating surface covered with synthetic teak water-resistant plywood. The combination of synthetic teak and waterproof plywood is used on boat and yacht decks and is designed to withstand various weather conditions: UV radiation, ice, and water.


Unlike wood, synthetic teak does not require annual varnishing or color protection, the material does not rot, does not react to temperature fluctuations, and is easy to maintain. In the long run, the product has lower maintenance and upkeep costs for the customer than wooden outdoor furniture.

LED light elements are embedded in the horseshoe metal form, which illuminate the path for pedestrians at dusk and act as light sculptures.

DESIGNERS

Triinu Triibmann & Diederik Kales

DIMENSIONS

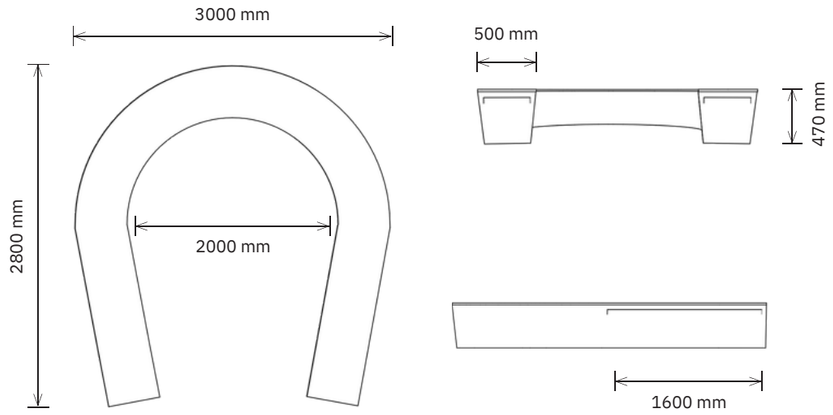

TECHNICAL INFORMATION

Product code	LO-HR-01
Lighting element	LED
Number of light elements	6
Maximum luminious flux (lm)	2500
Color rendering index (CRI)	≥90
Colour temperature (K)	2700/3000
Rated power (W)	42
Supply voltage (V)	24
Supply frequenzy (Hz)	50
Working temperature (Ta)	-25...+50°C
Moisture and dust resistance (IP)	66
Vandal resistance (IK)	08
Control	DALI


MATERIAL

Metal Parts	Stainless Steel
Seating Element	Synthetic teak-covered waterproof plywood

COLOURS

Metal Parts Finish	Brushed
Seating Surface Finish	Walnut Elite (back or gray joint)

CE

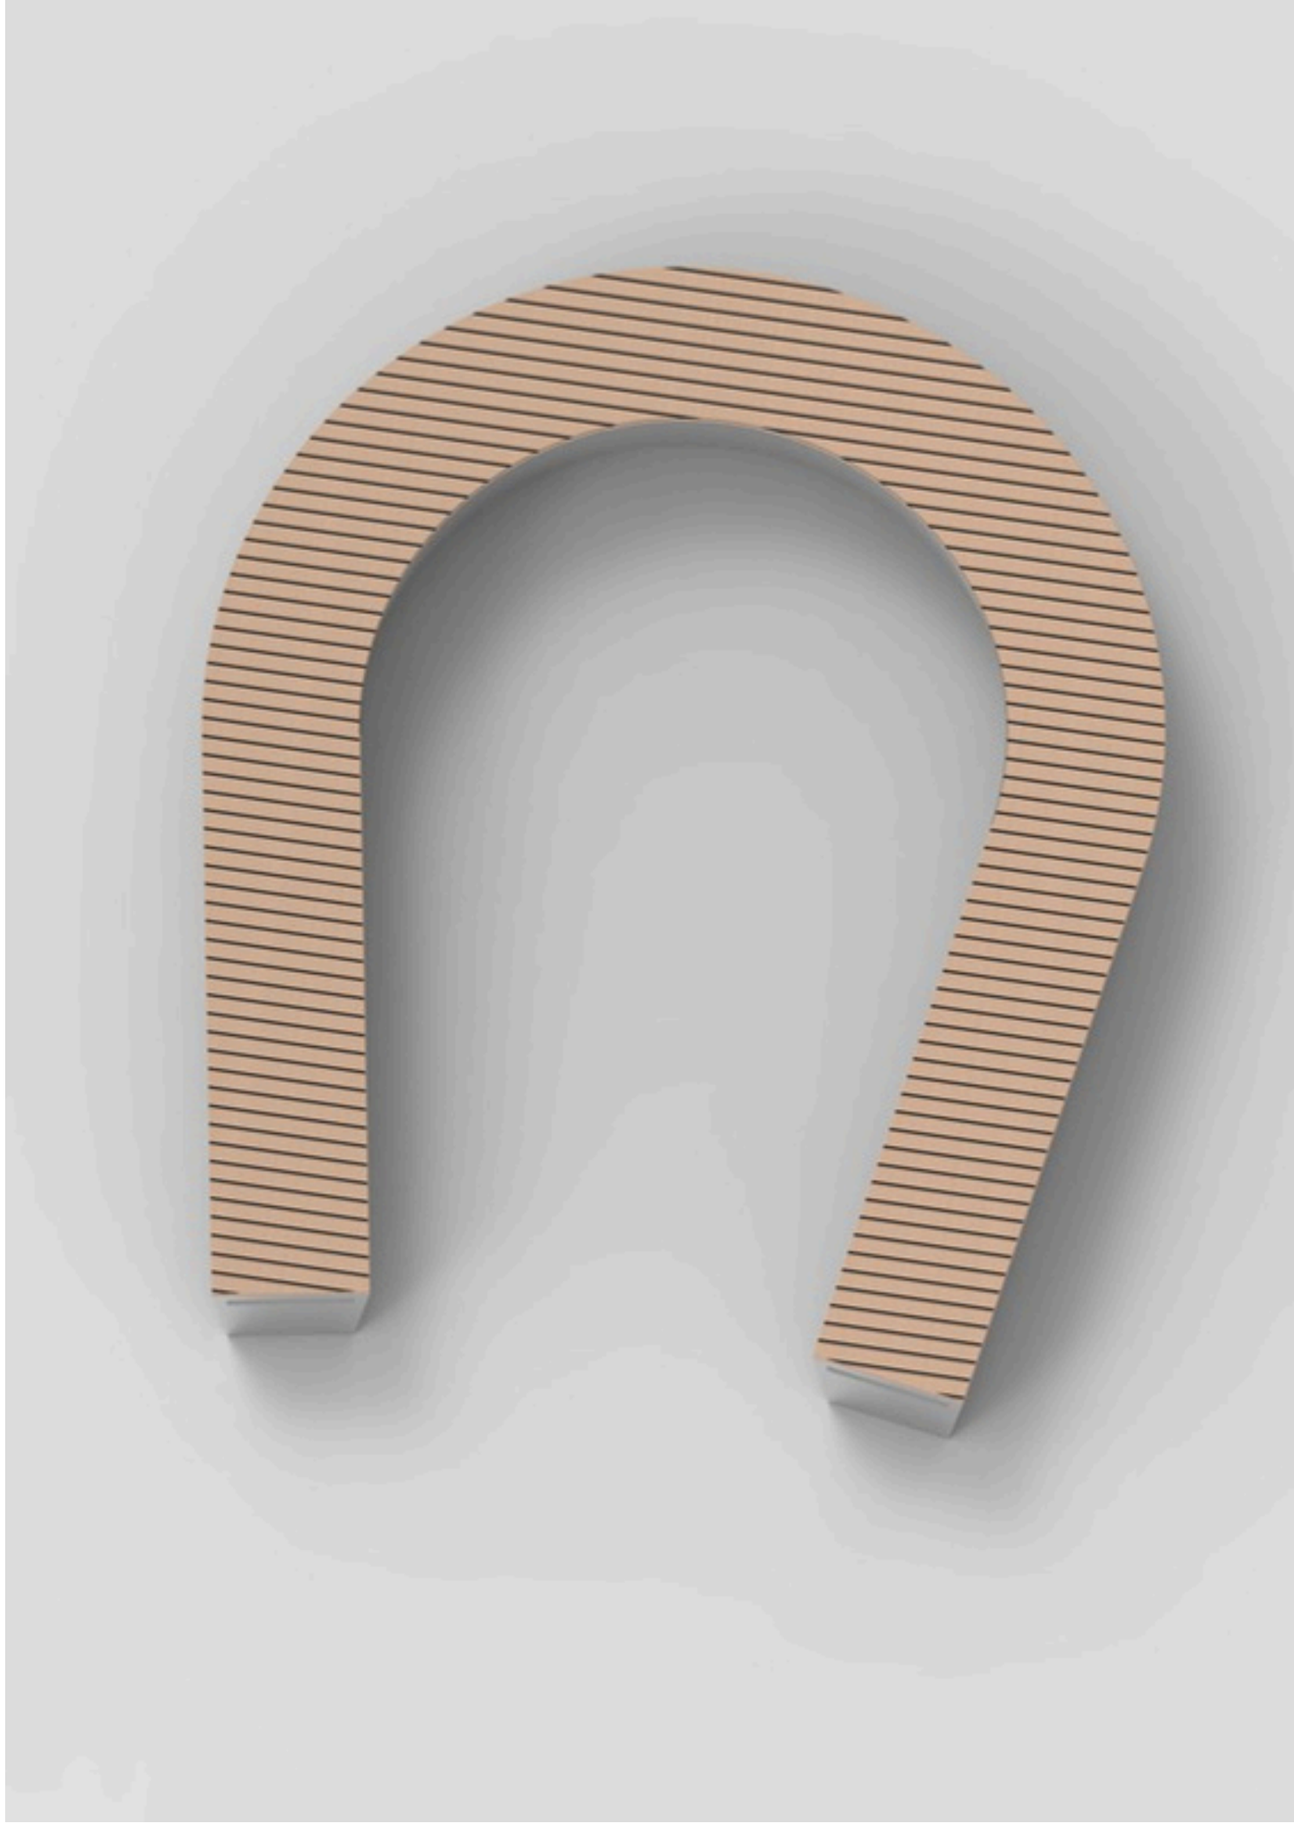

CORAL




Marina Service Pedestal

CO R A

e isiratio or or cativati marina service edestal co es ro ecliar arie
ivertebrates corals e sal or allo s s to create a di eret co ratios ltile
service atces ad o er otlets ca be o ted deedi o te re ire ets

e bod o te service edestal is ade ro drable olet lee lastic ad is se i tras aret to
li t e latter allo s s to tr tis iece o ctioal ard are ito a li ti tre tat adds
aestetic ad scl tral vale to te eviro et

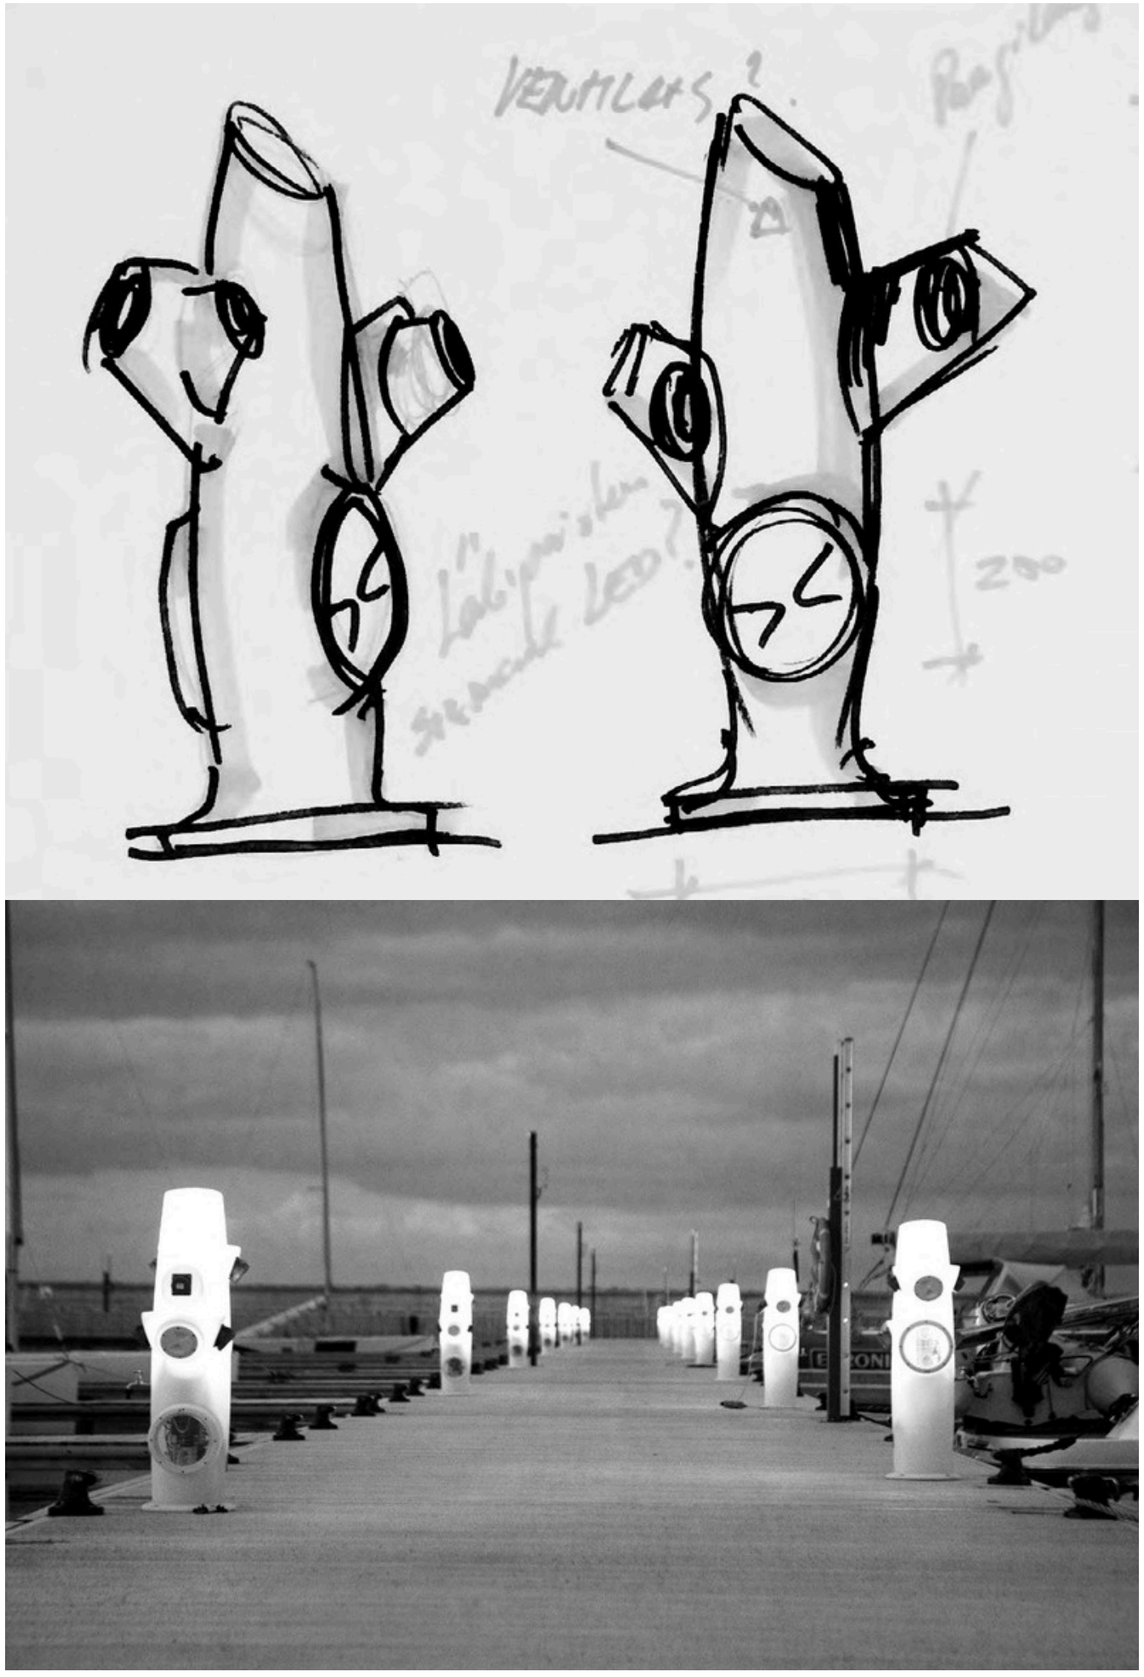


e braces o te coral are sed as o ti oits or o er otlets atces ad ater ta s to si di eret o er otlets ca be o ted o a si le service edestal e bod ad te electroic co oets are o ted o a cetral al i ra e ad te atces allo or a ic access i order to service electroic co oets or ca e te blbs e ater s l sste is searated ro te electroics tro atoo os eclosed sace ic esres itactess ad saeess i case o ater leaa es



Service atc lti le service atc es allo access to ele e ts la s it socet




lectric o tlet to electric socets i ere t t es o socets ca be istalled based o cliet s re est ro A to A Socets are rated P





ai service atc ai service atc is ade ro trasaret lastic sed or visal isectio o te ses as ell as ai te a ce ors





ater ta ater ta is located at te base o te service edestal ater i i is e t i a se arate str ct re ro elecro ics



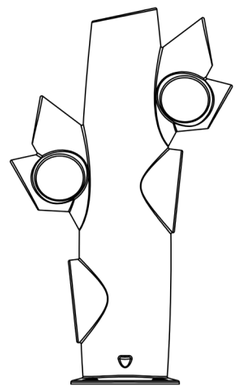



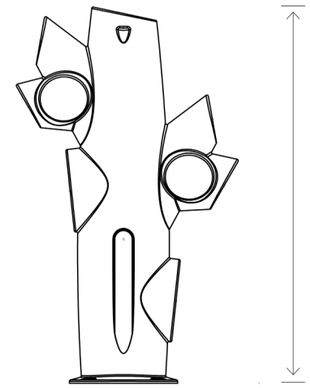



Item code	Outlets	Water	Optional
SP-CO-01	4x16A	√	WIFI
SP-CO-02	2x16A, 3x32A	√	WIFI
SP-CO-03	2x16A, 4x32A	√	WIFI
SP-CO-04	2x16A, 2x63A	√	WIFI
SP-CO-05	1x16A, 1x125A	√	WIFI
SP-CO-06	2x16A, 1x32A, 1x63A	√	WIFI
SP-CO-07	1x16A, 2x32A, 1x63A	√	WIFI
SP-CO-08	—	—	WIFI


ernational
URONICS



TETRAPOD



DESCRIPTION

Tetrapod is an urban space element inspired by the concrete tetra shaped elements used in water-works to build wavebreakers. Tetrapod can be used as a room divider, as a light object, or simply as a decorative object. With the clear reference to the martime world Tetrapod is very well suited for marina’s and seaside promenades.


The body of Tetrapod is made from semi-transparant white polyethylene, making it a sturdy and durable outdoor luminaire which can take a bump but which at the same time will also let light through. The caracteristics of the polyethylene surface of Tetrapod make it highly vandal proof as it requires special adhesives to stick to the surface permenantly. For example, graffiti will come off easy. Tetrapod is attached to its foundation using 3 special shaped stainless steel plates which allow the Tetrapod to be fixed using three bolts with bolt anchors.

Hidden at the bottom, in the middle of the Tetrapod, is a cork which gives access to the lighting element of Tetrapod. There is a version of Tetrapod available with an E27 socket. It is also possible for the cork to be fitted with a complete IP67 LED lighting solution. Both options can either have their power supply from the foundation, brought in through one of the legs of Tetrapod, or it can be fitted with a cable and plug. There is also a possiblility to add an on/off switch to the cork.

DESIGNER

Margus Triibmann

DIMENSIONS

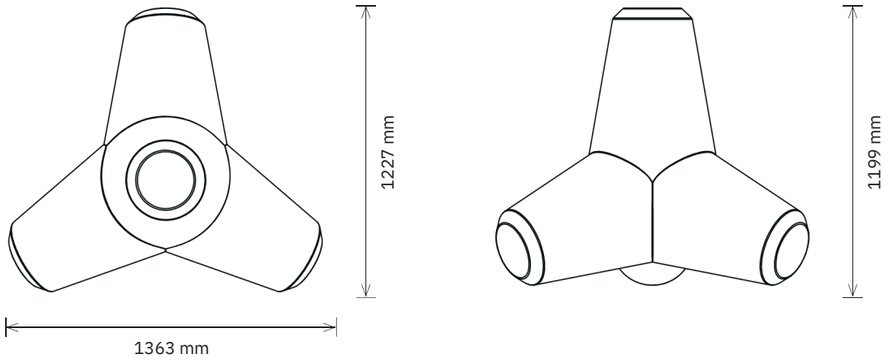

TECHNICAL INFORMATION

Socket	E27
Light control	External
IP rating	65
IK rating	8
Weight (kg)	30

MATERIAL

Body	Polyethylene
Attachment plates	Stainless Steel

COLORS

Product code	LO-TE-01
Body	Semi-transparent white
Attachment plates	Stainless Steel

CE





GRAZZ



DISCRIPTION

Grazz is a bike rack with three flexible uprights for parking a bike. Grazz can be used in multiple ways to park a bike, for example fitting the front wheel in between the uprights or resting the frame against them. Since the upper part is open it can easily fit different size of bike wheels. It’s also possible to create partitions or artificial barriers to spaces using multiple Grazz next to each other.


The foundation of Grazz is made from galvanized and powder painted steel. The flexible upper part consists of a steel cable covered with a UV resistant PE tube. There are three tube colors availa- ble for Grazz: black, white, and greenish grey. The foundation part can be powder painted in any desired RAL color. This can either create a uniform color or a nice contrasting color scheme. It’s even possible to change the tube of the uprights. That way it’s possible to change Grazz’s color or to give it a fresh look.

The bike rack can be fixed to its foundation using four bolt anchors or by casting the bottom plate of the bike rack into a concrete foundation.

DESIGNER

Margus Triibmann

DIMENSIONS

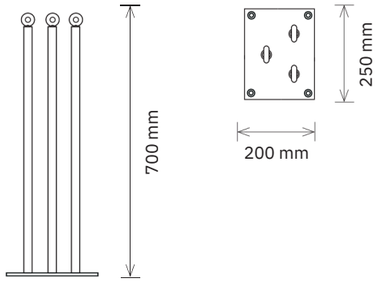

TECHNICAL INFORMATION

Weight (kg)	7
Packaging dimensions	L350 x W250 x H750 mm

MATERIAL

Tube	Polyethylene
Foundation	Galvanized and powder painted steel

COLORS

Product code	BR-GR-01
Tube	Greenish gray
Foundation	Anthracite grey (RAL 7016)

Product code	BR-GR-02
Tube	White
Foundation	Traffic white (RAL 9016)

Product code	BR-GR-03
Tube	Black
Foundation	Jet black (RAL 9005)

CE





TULIP



DISCRIPTION

Tulip is a bike rack with a flexible upper part which resembles a loop. Tulip can be used in multiple ways to park a bike, for example fitting the front wheel in the loop or resting the frame against its side. Since the upper part is flexible it can easily fit different size of bike wheels. It’s also possible to create partitions or artificial barriers to spaces using multiple Tulips next to each other.


The foundation of Tulip is made from galvanized and powder painted steel. The flexible upper part consists of a steel cable covered with a UV resistant tube. There are five tube colors available for Tulip: yellow, red, blue, grey and black. The foundation part can be powder painted in any desired RAL color. This can either create a uniform color or a nice contrasting color scheme. It’s even possible to change the tube of the flexible upper part. That way it’s possible to change Tulip’s color or to give it a fresh look.

The bike rack can be fixed to its foundation using four bolt anchors or by casting the bottom plate of the bike rack into a concrete foundation.

DESIGNER

Margus Triibmann

DIMENSIONS

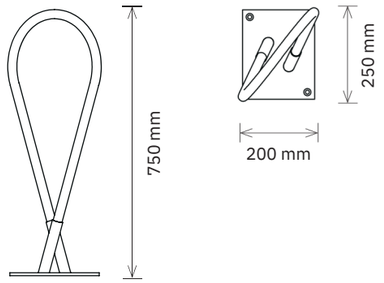

TECHNICAL INFORMATION

Weight (kg)	7
Packaging dimensions	L350 x W250 x H750 mm

MATERIAL

Tube	SPR or EPDM
Foundation	Galvanized and powder painted steel

COLORS

Product code	BR-TU-01
Tube	Yellow
Foundation	Antracite Grey (RAL 7016)

Product code	BR-TU-02
Tube	Grey
Foundation	Antracite grey (RAL 7016)

Product code	BR-TU-03
Tube	Red
Foundation	Antracite grey (RAL 7016)

Product code	BR-TU-04
Tube	Blue
Foundation	Skye blue (RAL 5015)

Product code	BR-TU-05
Tube	Black
Foundation	Jet black (RAL 9005)

CE





TYPO



DESCRIPTION

Typo is a functional fusion of street furniture and graphic communication. This bicycle rack doesn’t just serve a practical purpose—it also acts as a medium for identity, messaging, and place-making in public space.


Designed as a sculptural barrier, Typo can spell out company names, city or district identifiers, or custom messages, offering a bold visual presence in parks, plazas, and urban environments. Whether marking an entrance or defining a boundary, it blends utility with expressive form.

Letters are available in the Arabic alphabet and can be permanently installed by casting them into concrete, ensuring durability and a clean, integrated look.

DESIGNER

Margus Triibmann

DIMENSIONS

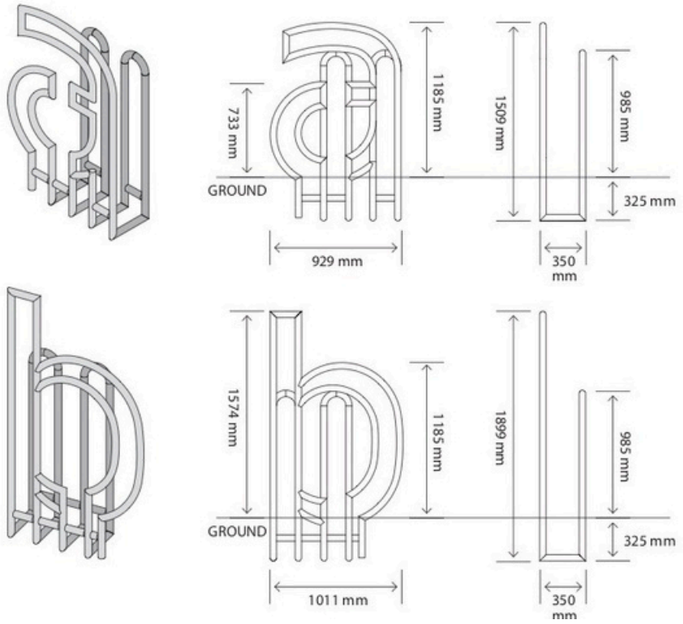

VERSIONS

~~Product code~~	BR-TY-01
~~Material~~	Stainless steel
~~Colour~~	N/A
~~Weight~~	Depends on the letter

Product code	BR-TY-02
Material	Galvanized steel
Colour	N/A
Weight	Depends on the letter

Product code	BR-TY-03
Material	Galvanized & Painted steel
Colour	Any RAL
Weight	Depends on the letter

CE



